B Science. Applied to Life.™

Product catalogue 2024

Industrial Adhesives and Tapes

3M United Kingdom PLC | 3M Ireland Limited

Valid from 01.12.2023

The information in this catalogue is current at the date of publication. Products availability may be amended by 3M from time to time. 3M is not liable in case of any errors or omissions.



Table of Contents

Adhesives, Sealants & Fillers

| Two Part Structural Adhesives | |
|-------------------------------|----|
| One Part Structural Adhesives | 27 |
| Instant Adhesives | 28 |
| Anaerobic Adhesives | 30 |
| Curing Hot Melt Adhesives | 31 |
| Solvent-based Adhesives | 33 |
| Water-based Adhesives | 38 |
| Hot Melt Adhesives | 40 |
| Adhesive Sealants | 45 |
| Applicator Nozzles & Tips | 49 |
| Electric Applicators | 50 |
| Application Accessories | 50 |
| Adhesion Promoters | 51 |

Cleaning Supplies

| General Purpose Cleaners | 56 |
|--------------------------|----|
| General Purpose Cleaners | 20 |

Double Sided Tapes

| VHB Tapes | 60 |
|----------------------------|-----|
| General Purpose Foam Tapes | 79 |
| Adhesive Transfer Tapes | 83 |
| Membrane Switch Spacers | 96 |
| Bonding Tapes | 104 |

Reclosable Fasteners

| Hook & Loop | 121 |
|-------------|-----|
| Dual Lock | 125 |

Table of Contents

Single Sided Tapes

| Vinyl Tapes | 135 |
|-----------------------------|-----|
| Foil Tapes | 142 |
| Polyester Tapes | 144 |
| PTFE tapes | 147 |
| UHMW Tapes | 149 |
| Filament Tapes | 150 |
| Specialty Application Tapes | 154 |
| Masking Tapes | 156 |
| Paper Masking Tapes | 163 |
| Cloth & Duct Tapes | 164 |
| Sealing Tapes | 169 |

Paper and Print

| Splicing & Tabbing Tapes | 175 |
|-----------------------------------|-----|
| Flexographic Plate Mounting Tapes | 181 |

Packaging Systems

| Packaging Tapes | 196 |
|-------------------|-----|
| Box Sealing Tapes | 197 |
| Hang Tabs | 203 |

Films

| Surface Protection Films | 206 |
|--------------------------|-----|
|--------------------------|-----|

Tools & Equipment

| Tape Applicators, Dispensers & Kits | 208 |
|-------------------------------------|-----|
| Manual Applicators | 210 |
| Pneumatic Applicators | 210 |



Labels

Label Stock

212

Connect with us. We're here to help.

3M[™] Bonding and Assembly Solutions

We can help you solve your design challenges

Finding the right adhesive or tape involves choosing likely candidates and testing them in your application. Knowing more about how adhesion works can help you find the right path.

Across industries, applications, and substrates, 3M offers a wide range of bonding products that make it easy to solve your real-world assembly challenges.

Bonding & Assembly Resources


Every project and material demands a unique bonding or assembly solution. So, to help you find the solution you need, we've put together a collection of resources.



- Contact us
- Subscribe to Newsletter
- Request a sample
- Learn more about 3M Bonding Solutions
- Webinar On-Demand Portal
- Online product selector
- Technical Videos

Turning your design vision into manufactured reality

Companies are moving to automation to meet changing customer demands – and are improving their own businesses at the same time. Even low levels of automation can have a significant effect on improving your process, quality and cost.



3M[™] Automation Capabilities

Automation may benefit your process; however, some factors may influence your readiness to move to automated solutions. It's helpful to know where you fall on the spectrum for each of these factors.



3M[™] Bonding Process Centre & 360 Experience

In our facility in Neuss, Germany, we explore with customers the right future for their manufacturing process. It features the latest automation equipment for adhesive dispensing and tape application.

Take a closer look at our 3M Bonding Process Centre in Neuss through our interactive 360 tour. See inside different areas across the site and learn more about the cutting-edge adhesive technology that's used there.



Model and similate your bond

Get access to 3M[™] Material Data Cards and expert. FEA support for your project. Book a 30-min meeting with our Expert.

Success belongs to those who make a difference. Let's take the road together.



- 360 Experience 3M[™] Bonding Process Center Neuss
- Brochure: 3M[™] Bonding Process Centre Neuss
- Book a meeting with 3M[™] Material Data Card (MDC) for Modelling / Finite Element Analysis (FEA) Expert
- Automation Handbook



3M[™] Preferred Converter & Adhesion Distributor Networks

3M[™] Preferred Converters

3M preferred converters enhance the value of 3M's top-tier tape adhesive technologies by crafting customised, cost-efficient shaped components tailored to your specific requirements. Their expertise encompasses materials and adhesive knowledge, complementing your design insights with practical adhesive solutions. Beyond adhesive recommendations, 3M converter partners bring extensive engineering know-how to the table, actively aiding your design process.

3M[™] Preferred Adhesive Distributors

As a 3M preferred adhesive distributor, our partners make the commitment to understanding more than just adhesive chemistry. They understand the importance of serving industrial design and assembly customers with direct access to the right 3M adhesives, and technical support for their applications. They provide valuable technical and logistical expertise along with a comprehensive range of 3M adhesives.

Connect with a 3M expert

If you are interested in learning more about our preferred distributors or converting solutions and how they can be used to add value to your manufacturing process, please scan or click on the QR code below.



- Connect with 3M experts
- Find your converter
- Adhesives Where to buy

3M[™] Scotch-Weld[™] 2 Part Structural Adhesives

Powerful adhesives that can bond even the most challenging surfaces.


















Metal Bonding

3M[™] Scotch-Weld[™] Metal Bonder Acrylic Adhesive DP8407NS is the go-to adhesive for high-strength, durable bonding of metals, plastics, and composites. With excellent impact resistance and easy dispensing, DP8407NS is the ideal solution for your toughest bonding challenges.

Plastics Bonding

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8010 is the ultimate solution for low surface energy bonding. This two-part structural adhesive is specially designed to provide high-strength bonding for polypropylene, paints and other challenging surfaces.

Multi-Material Bonding

3M[™] Scotch-Weld[™] Composite Urethane Adhesive DP6310NS is a non-sag adhesive designed to provide superior strength and versatility for even the most challenging surfaces.

Nylon Bonding

3M[™] Scotch-Weld[™] Acrylic Adhesive 8910NS is the ultimate solution for bonding nylon materials. With its high strength and durability, this adhesive offers exceptional performance for a variety of industrial applications.

The Flexible

3M[™] Flexible Acrylic Adhesive 8600 Series is a high-performing adhesive that offers excellent bonding strength, durability, and flexibility. Perfect for a wide range of applications.

The Tough

Discover the power of 3M[™] Scotch-Weld[™] Epoxy Adhesive DP490. With excellent bonding strength and durability, it's perfect for heavy-duty industrial applications.

The Fast

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8710NS is a high-performance, non-sagging adhesive with a rapid rate of strength build. It offers excellent bonding strength, durability, and impact resistance, making it ideal for demanding applications where reliability is crucial.

The Resistant

3M[™] Low Odour Acrylic Adhesive 8700 Series is an adhesive that elivers superior bonding strength and excellent resistance to heat, water, and chemicals, with minimal odour.



Two Part Structural Adhesives

3M[™] Scotch-Weld[™] Epoxy Adhesive DP100 Plus

Bond metals ceramics, glass and other dissimilar surfaces with 3M[™] Scotch-Weld[™] Epoxy Adhesive DP100 Plus. Our clear, epoxy adhesive with high shear strength for static loads is fast-setting and flexible to last in all conditions. It's designed to contract and expand to flex with a changing environment.

- Very flexible adhesive provides strong, permanent bond even under vibration and impact
- Fast 4 minute work life with handing strength in 20 minutes at room temperature
- Good high shear and peel strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100148750 | DP100PL48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP100 Plus, Transparent, 48.5 ml, Applicator Needed | 12 | Each |
| 7100069498 | 100PLUS200 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP100 Plus, Transparent, 200 ml | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP100FR


3M[™] Scotch-Weld[™] Epoxy Adhesive DP100FR is a flame retardant, non-sag, two-part, rigid epoxy adhesive offering a fast cure and machinability. It is a fast-setting epoxy that cures at room temperature to form a rigid bond. Low viscosity for easy dispensing and leveling. Non-sag formulation ensures adhesive stays where applied.

- UL 94 V-0 certified, FAR 25.853 60 second vertical burn test
- Adhesive formula cures rigid for high static load holding
- High shear ensures a permanent bonds

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100148760 | DP100FROW48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP100FR, Creme, 48.5 ml | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP100

3M[™] Scotch-Weld[™] Epoxy Adhesive DP100 is a two-part, rigid epoxy adhesive offering a fast cure and machinability. It is a fast-setting epoxy that cures at room temperature to form a rigid bond. Has low viscosity for easy dispensing and leveling.



- High shear ensures permanent bonds
- Fast 5 minute work life with handling strength in 20 minutes at room temperature

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100200484 | DP100ADH48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP100, Transparent, 48.5 ml | 12 | Each |





3M[™] Scotch-Weld[™] Epoxy Adhesive DP105

3M[™] Scotch-Weld[™] Epoxy Adhesive DP105 is a very flexible, fast-setting, two-part epoxy adhesive that cures clear for invisible bond lines.

- Extremely flexible adhesive formula provides strong, permanent bond even under vibration and impact
- Maintains high shear and peel strength
- Flexible when cured, making it a good choice for multi-material bonding

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100200485 | DP105ADH48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP105, Transparent, 48.5 ml | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP110 Grey

3M[™] Scotch-Weld Epoxy Adhesive DP110 Grey is a flexible, fast-setting, two-part epoxy adhesive that works well on a variety of substrates, including metals, ceramics, concrete, composites, wood and many plastics.

- Flexible adhesive provides strong, permanent bond even under vibration and impact
- Maintains high shear and peel strength
- Flexible when cured, making it a good choice for multi-material bonding

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7100200487 | DP110ADHGY48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP110, Grey, 48.5 ml | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP110 Translucent

3M[™] Scotch-Weld[™] Epoxy Adhesive 110 is a general purpose, fast setting, flexible, two-part epoxy adhesive. This medium viscosity adhesive cures to handling strength in 20 minutes in order to provide a flexible bond on materials such as metals, ceramics, woods and many plastics.

- Very flexible adhesive formula provides strong, permanent bond even under vibration and impact
- Provides high shear and peel strength on metals and many plastics
- Allows for some differential thermal expansion between substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100200486 | DP110ADH48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP110, Transparent, 48.5 ml | 12 | Each |
| 7000079998 | DP110400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP110, Transparent, 400 ml | 6 | Each |







12

3M[™] Scotch-Weld[™] Epoxy Adhesive DP125 Grey

We formulated 3M[™] Scotch-Weld[™] Epoxy Adhesive 125 as a low odour, two-part epoxy that creates strong structural and flexible bonds on metal, ceramics, wood and many plastics. It provides the reliability and strength you need to maintain productive, cost effective results.



- Flexible for higher peel strength and better vibration resistance
- Maintains a strong bond under expansion, contraction, and limited movement
- Medium viscosity helps minimize running, dripping, or migration

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100200488 | DP125ADHGY48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP125, Grey, 48.5 ml | 12 | Each |
| 7100076727 | DP125400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP125, Grey, 400 ml | 6 | Each |
| 7100084588 | 125A5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP125, Grey, Part A, 18.9 L | 1 | Drum |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP190 Grey

3M[™] Scotch-Weld[™] Epoxy Adhesive DP190 is a two-part epoxy adhesive that delivers exceptional performance with high shear and peel strength. Extremely compatible, we formulated this epoxy adhesive to bond to a wide range of materials, such as metals, ceramics, wood, fiberboard, glass, rubber and many plastics.



- \bullet Use a tough high shear and peel strength adhesive
- Apply with ease with a low viscosity formulation
- Get a two-part epoxy adhesive that's highly compatible with many different materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7000080020 | DP19010 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP190, Grey, 10 L Kit | 1 | Kit |
| 7100200489 | DP190ADHGY48.5 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP190, Grey, 48.5 ml | 12 | Each |
| 7100200490 | DP190ADHGY400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP190, Grey, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive 2216 Grey

3M[™] Scotch-Weld[™] Epoxy Adhesive 2216 allows you to work confidently with tiles and many different materials. Our high strength, two-part epoxy resin is excellent for bonding metals, woods, plastics, rubbers and masonry materials. It's a perfect tile adhesive – giving a high strength bond, yet flexible to withstand thermal expansion and contraction. It won't become brittle in the cold, either. Cure at room temperature, to a high strength bond with both high shear and peel strength, without compromise to flexibility. Mix with ease, the base and accelerator are contrasting colours. Our adhesive remains strong in all elements and is resistant to extreme shock, vibration, and flexing

- Very flexible bond is resistant to extreme shock, vibration and flexing, making it ideal for potting and applications in the transportation industries
- Maintains a strong bond under expansion, contraction, and limited movement while retaining good strength after environmental aging
- Excellent for cryogenic bonding applications or adhering substrates that will be exposed to extreme cold

| 11 | MR. | | | 364 | |
|------|-----|-----|-----|-------|-----|
| 1.8 | | | 125 | babde | - 1 |
| 28 | | | 100 | 5 | |
| 1. | | 21 | 15 | | |
| 10.0 | | 1.0 | | | |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100141727 | 2216B/A 1.6KIT | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2216, Grey, 1.6 L | 1 | Kit |
| 7100141986 | 2216B/A250ML | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2216, Grey, 12 ml / 250 ml | 12 | Kit |
| 7100140578 | 2216PTA20L | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2216, Grey, Part A, 20 L | 1 | Drum |
| 7100140400 | 2216PTB20L | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2216, Grey, Part B, 18 L | 1 | Drum |
| 700000812 | 221635 | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2216, Grey, Part B/A, 59 ml | 6 | Kit |
| 7100141716 | 2216135 | 3M™ Scotch-Weld™ Epoxy Adhesive 2216, Grey, Part B/A, 135 ml | 12 | Kit |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP460

Whether joining, adhering, attaching, repairing, potting, panel or structural bonding, use 3M[™] Scotch-Weld[™] Epoxy Adhesive DP460. Our 60 minute work-life adhesive gives the highest shear, peel, impact, vibration and fatigue resistance in the Scotch-Weld[™] Epoxy Adhesive family



- 60 minute work life allows sufficient time for adjustments
- Toughened for impact resistance and high fatigue resistance to withstand demanding conditions
- Easy-to-mix and apply for straightforward application

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100200496 | DP460ADHBG50 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP460 Off-White, 50 ml | 12 | Each |
| 7100200498 | DP460ADHBG400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP460, Beige, 400 ml | 6 | Each |
| 7100269980 | DP460 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP460, Off-White, Part A, 20 L | 1 | Drum |
| 7100270164 | DP460 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP460, Off-White, Part B, 20 L | 1 | Drum |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP490

3M[™] Scotch-Weld[™] Epoxy Adhesive 490 is a black, thixotropic, gap filling two component epoxy adhesive with particularly good application characteristics. It is designed for use where ultimate toughness and high strength are required.

- Get a tough, high strength adhesive
- High strength to withstand demanding conditions
- Non-sag for easy application to vertical surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100200499 | DP490ADHBK50 | 3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, 50 ml, Label1 | 12 | Each |
| 7100200501 | DP490ADHBK400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP490, Black, 400 ml | 6 | Each |
| 7100269979 | DP490 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP490, Black, Part A, 18 L | 1 | Drum |
| 7100269978 | DP490 | 3M™ Scotch-Weld™ Epoxy Adhesive DP490, Black, Part B, 18 L | 1 | Drum |

3M[™] Scotch-Weld[™] EPX Polyurethane Adhesive DP609

Bond plastics, wood and painted or primed metal surfaces with 3M[™] Scotch-Weld[™] EPX[™] Polyurethane Adhesive DP609. Our fast curing, flexible structural adhesive has great strain capability, high toughness and ability to retain high strength over a wide temperature range.

- Work life of 7 to 9 minutes
- Reaches handling strength in around 30 to 45 minutes
- Non-sag formulation ensures adhesive stays where applied

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7100200502 | DP609ADHBG48.5 | 3M [™] Scotch-Weld [™] EPX Polyurethane Adhesive DP609, Beige, 48.5 ml | 12 | Each |
| 7000080396 | DP609400 | 3M™ Scotch-Weld™ EPX Polyurethane Adhesive DP609, Beige, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Polyurethane Adhesive DP610

Bond plastics, glass and painted metals with 3M[™] Scotch-Weld[™] Polyurethane Adhesive DP610 to give a clear, structural bond.

- Clear, non-yellowing bondlines
- Highly flexible adhesive
- 10 minute worklife with around 2 hours to handling strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100200503 | DP610ADH48.5 | 3M [™] Scotch-Weld [™] Polyurethane Adhesive DP610, Transparent, 48.5 ml | 12 | Each |



3M[™] Scotch-Weld[™] Epoxy Adhesive DP760

3M[™] Scotch-Weld[™] Epoxy Adhesive 760 is a non-sag, rigid, two-part room temperature curing adhesive designed for use in applications that require especially high temperature resistance.

- High temperature resistance up to 230°C
- Open time of 45 to 60minutes
- Reaches handling strength in 4 to 6 hours

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100200505 | DP760ADHWT50 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP760, White, 50 ml | 12 | Each |
| 7100200506 | DP670ADHWT400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP760, White, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] EPX Super Clear Acrylic Adhesive DP804

The Scotch-weld[™] EPX[™] Bonding System is a discharging system for mixing two-component mixed adhesives. The main agent and the curing agent with the cartridge are mixed and discharged by a special hand gun and a special nozzle.

- Easy mixing and apply with the help of the EPX gun.
- Easy to use
- 3 Minutes of working time. 4 minutes of handling time.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7100200508 | DP804ACRAD48.5 | 3M [™] Scotch-Weld [™] EPX Super Clear Acrylic Adhesive DP804, Transparent, 48.5 ml, Label2 | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive 3520

Adhesive to bond metal, glass, ceramic, wood and select plastics. Good flow properties. 3M's high-strength structural adhesives are fundamentally load-bearing formulations. Bond strength is often as strong as, or stronger than the materials joined.

- Adhesive to bond metal, glass, ceramic, wood and some plastics
- Good fluidity
- Excellent mechanical resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-----|
| 7100185158 | 3520KIT2L | 3M [™] Scotch-Weld [™] Epoxy Adhesive 3520, Transparent, Part B/A, 2 L | 1 | Kit |

3M[™] Scotch-Weld[™] Epoxy Adhesive 7260

The 3M[™] Scotch-Weld[™] B/A Epoxy Adhesive 7260 is a high performance, two-part toughened epoxy adhesive. This product is very durable with excellent adhesion to metals and thermoset plastics.

- High peel and shear strength for durable, long-lasting bonds
- Excellent adhesion to metallic surfaces and thermoset plastics
- Available with open times of up to 90 mins (Fast Cure) or 300 mins (standard)

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7000080008 | 564037 | 3M [™] Scotch-Weld [™] Epoxy Adhesive 7260, Black, Part B/A, 400 ml | 6 | Each |
| 7000080037 | SW7260FCBA400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive 7260FC, Black, Part B/A FC NS, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Structural Adhesive 7838

3M[™] Scotch-Weld[™] Structural Adhesive 7838 is a thixotropic two-part epoxy based adhesive. This adhesive is flexible and has excellent adhesion to metals, plastics and glass.

- Room temperature curing
- Cured adhesive bonds exhibit excellent flexibility and high adhesion to metals, plastics and glass
- Cured adhesive bonds exhibit good strength retention after ageing in hostile environments

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|-----|
| 7100185187 | 7838STRLADHA&B | 3M [™] Scotch-Weld [™] Structural Adhesive 7838, Part A/B, 2 kg, Kit | 1 | Kit |

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8010

3M[™] Scotch-Weld[™] Structural Plastic Adhesive DP8010 Blue is a two-part acrylic adhesive specially formulated to bond many low surface energy plastics, including many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPEs) without special surface preparation.

- Creates strong bond on low surface energy plastics (LSE) such as polyolefin with minimal or no surface prep required
- Resists many chemicals, water, humidity and corrosion
- Formulated to bond multi-material assemblies such as LSE plastics, thermoplastics, composites and metals

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100036717 | DP801035 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8010, Blue, 45 ml | 12 | Each |
| 7100036719 | 8010490 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8010, Blue, 490 ml | 6 | Each |





3M[™] Scotch-Weld[™] Epoxy Potting Compound DP270 Black

3M[™] Scotch-Weld[™] Epoxy Potting Compound 270 is a rigid, two-part epoxy adhesive potting compound. 1:1 mix ratio, 70 minute work life and handling strength in approximately 3 hours.

- 70 minute worklife
- Non-corrosive to copper
- Rigid potting compound

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|----------|
| 7100200492 | DP270ADHBK48.5 | 3M [™] Scotch-Weld [™] Epoxy Potting Compound DP270, Black, 48.5 ml | 12 | Each |
| 7100082565 | 209258 | 3M [™] Scotch-Weld [™] Epoxy Potting Compound DP270, Black, 400 ml | 6 | Each |
| 7000046463 | DP270BLA | 3M [™] Scotch-Weld [™] Epoxy Potting Compound DP270, Black, Part A, 18.9 L | 1 | Canister |
| 7000046439 | DP270BLB | 3M [™] Scotch-Weld [™] Epoxy Potting Compound DP270, Black, Part B, 18.9 L | 1 | Canister |

3M[™] Scotch-Weld[™] Epoxy Potting Compound DP270 Clear

3M[™] Scotch-Weld[™] Epoxy Potting Compound 270 is a rigid, two-part epoxy adhesive potting compound. 1:1 mix ratio, 70 minute work life and handling strength in approximately 3 hours.

- 70 minute worklife
- Non-corrosive to copper
- Rigid potting compound

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100200493 | DP270ADHCL48.5 | 3M [™] Scotch-Weld [™] Epoxy Potting Compound DP270, Clear, 48.5 ml | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP420 Black

3M[™] Scotch-Weld[™] Epoxy Adhesive DP420 is a toughened, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M[™] Scotch-Weld Epoxy Adhesive DP420 can replace mechanical fasteners, screws, rivets and spot welds in many applications.

- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100148731 | DP420BL50 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP420, Black, 50 ml | 12 | Each |
| 7100077148 | 420400B | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP420, Black, 400 ml | 6 | Each |

18





3M[™] Scotch-Weld[™] Epoxy Adhesive DP420 Off-White

3M[™] Scotch-Weld[™] Epoxy Adhesive DP420 is a toughened, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M[™] Scotch-Weld Epoxy Adhesive DP420 can replace mechanical fasteners, screws, rivets and spot welds in many applications.

- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100148736 | DP420OW50 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP420, Off-White, 50 ml Duo-Pack | 12 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive DP420NS

3M[™] Scotch-Weld[™] Epoxy Adhesive DP420NS is a black, toughened, non-sag, two-part epoxy structural adhesive that provides good strength along with high impact and fatigue resistance to meet demanding bonding challenges. 3M[™] Scotch-Weld Epoxy Adhesive DP420NS can replace mechanical fasteners, screws, rivets and spot welds in many applications.

- High peel and shear strength maintains lasting bond at high and low temperatures
- Toughened for impact and fatigue resistance
- 20 minute work life provides time for positioning and adjustment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100148758 | DP420NSBL50 | 3M [™] Scotch-Weld [™] Epoxy Adhesive DP420NS, Black, 50 ml | 12 | Each |
| 7100010680 | DP420NSBLK420 | 3M™ Scotch-Weld™ Epoxy Adhesive DP420NS, Black, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Urethane Adhesive DP604NS

3M[™] Scotch-Weld[™] Urethane Adhesive 604 is a non-sag, two-component polyurethane adhesive. Rapid-setting, this urethane adhesive offers a fast, yet flexible solution that can be used for bonding dissimilar substrates, such as concrete, ceramic, wood, plastic, rubber and metal.

- Fast-curing adhesive delivers tough bonds quickly
- Non-sag properties for precise handling during application
- Low-temperature flexibility provides opportunity for adjustments

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100148738 | DP604NSBL48.5 | 3M [™] Scotch-Weld [™] Urethane Adhesive DP604NS, Black, 48.5 ml Duo-Pak | 12 | Each |







3M[™] Scotch-Weld[™] Urethane Adhesive DP620NS

3M[™] Scotch-Weld[™] Urethane Adhesive 620NS is a flexible, two-part polyurethane based structural adhesive that performs well in numerous applications where some flexibility is needed. It effectively bonds to many substrates such as composites, metals, wood, and many plastics and rubbers, ceramics and glass (may require primer for durability).

- Versatile polyurethane adhesive has excellent impact resistance and easily adheres to a variety of substrates
- Low dispense viscosity; yet non-sagging after dispensing so adhesive stays where placed
- Low temperature flexibility and low shrinkage

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100148737 | DP620NSBL48.5 | 3M [™] Scotch-Weld [™] Urethane Adhesive DP620NS, Black, 48.5 ml | 12 | Each |
| 7000046372 | 477827 | 3M [™] Scotch-Weld [™] Urethane Adhesive DP620NS, Black, 400 ml | 24 | Pack |

3M[™] Scotch-Weld[™] Composite Urethane Adhesive DP6310NS

3M[™] Scotch-Weld[™] Multi-Material Composite Urethane Adhesive DP6310NS is a green, non-sag, two-component urethane for bonding a variety of composites, plastics, metals and wood. This flexible adhesive has excellent elongation and stress strain properties for durable bonding of composite parts and multi-material assemblies.

- Two part urethane paste delivers outstanding strength and performance
- Non-sag formulation resists running and slumping of adhesive
- Primerless to most surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100109829 | 6310NS48 | 3M [™] Scotch-Weld [™] Composite Urethane Adhesive DP6310NS, Green, 48.5 ml | 12 | Each |
| 7100109830 | 6310NS400 | 3M [™] Scotch-Weld [™] Composite Urethane Adhesive DP6310NS, Green, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Composite Urethane Adhesive DP6330NS

3M[™] Scotch-Weld[™] Multi-Material Composite Urethane Adhesive DP6330NS is a green, non-sag, two-component urethane paste for bonding a variety of composites, plastics, metals and wood. This flexible adhesive has good energy absorption and fatigue properties for durable bonding of composite parts and multi-material assemblies.

- Two part urethane paste delivers outstanding strength and performance
- Non-sag formulation resists running and slumping of adhesive
- Primerless to most surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100109828 | 6330NS48 | 3M [™] Scotch-Weld [™] Composite Urethane Adhesive DP6330NS, Green, 48.5 ml | 12 | Each |
| 7100109827 | 6330NS400 | 3M [™] Scotch-Weld [™] Composite Urethane Adhesive DP6330NS, Green, 400 ml | 6 | Each |
| 7100143961 | 6330NS5GALA | 3M [™] Scotch-Weld [™] Composite Urethane Adhesive DP6330NS, Green, Part A, 18.9 L | 1 | Drum |
| 7100143701 | 6330NS5GALB | 3M™ Scotch-Weld™ Composite Urethane Adhesive DP6330NS, Green, Part B, 18.9 L | 1 | Drum |

3M[™] Scotch-Weld[™] Epoxy Adhesive 7240 FR

3M Scotch Weld 7240 FR B/A epoxy adhesive is a toughened, two-part epoxy adhesive with a 2:1 mix ratio, 45 minute work life and handling strength in approximately 6 hours. This product is very durable and commonly used in applications in the transportation industry.

- Excellent environmental resistance tested in a variety of demanding conditions
- Contains 300 µm glass beads for accurate glue line control.
- Tested to FAR25 (vertical burn) and meets the 15 second self extinguishing requirement.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100042087 | 72406400 | 3M [™] Scotch-Weld [™] Epoxy Adhesive 7240 FR, Black, Part B/A, 400 ml | 6 | Each |

3M[™] Scotch-Weld[™] Structural Plastic Adhesive DP8005 Black

3M[™] Scotch-Weld[™] Structural Plastic Adhesive 8005 is one of our 10:1 ratio, two-part acrylic based adhesive specially formulated to bond many low surface energy plastics. It will adhere many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPE's) without special surface preparation.

- Ability to structural bond low surface energy plastics such as polyolefins, polypropylene, polyethylene and TPO's
- Excellent resistance to water and humidity combined with very good chemical resistance results in a bond that can withstand a variety of applications and conditions
- Cures at room temperature without heat or other chemicals to eliminate complex adhesion processes

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100089475 | 716254 | 3M [™] Scotch-Weld [™] Structural Plastic Adhesive DP8005, Black, 45 ml | 12 | Each |
| 7100089476 | 716261 | 3M [™] Scotch-Weld [™] Structural Plastic Adhesive DP8005, Black, 490 ml | 6 | Each |

3M[™] Scotch-Weld[™] Structural Plastic Adhesive DP8005 Off-White

3M[™] Scotch-Weld[™] Structural Plastic Adhesive 8005 is one of our 10:1 ratio, two-part acrylic based adhesive specially formulated to bond many low surface energy plastics. It will adhere many grades of polypropylene, polyethylene, and thermoplastic elastomers (TPE's) without special surface preparation.

- Ability to structural bond low surface energy plastics such as polyolefins, polypropylene, polyethylene and TPO's
- Excellent resistance to water and humidity combined with very good chemical resistance results in a bond that can withstand a variety of applications and conditions
- Cures at room temperature without heat or other chemicals to eliminate complex adhesion processes

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100240965 | 8005T490 | 3M [™] Scotch-Weld [™] Structural Plastic Adhesive DP8005, Beige, 490 ml | 6 | Each |
| 7000080039 | 8005ACC2L | 3M [™] Scotch-Weld [™] Structural Plastic Adhesive DP8005, Transparent, 2 L | 2 | Canister |
| 7000080038 | 800510BE | 3M [™] Scotch-Weld [™] Structural Plastic Adhesive DP8005, White, 10 L | 1 | Each |







3M[™] Scotch-Weld[™] Acrylic Adhesive DP8405NS

3M[™] Scotch-Weld[™] Acrylic Adhesive DP8405NS is a non-sag, toughened, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 5 minute work life with 20 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds to a variety of surfaces, including most metals and plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100009688 | 661371 | 3M [™] Scotch-Weld [™] Acrylic Adhesive DP8405NS, Green, 45 ml | 12 | Each |
| 7100011056 | 661372 | 3M [™] Scotch-Weld [™] Acrylic Adhesive DP8405NS, Green, 490 ml | 6 | Each |

3M[™] Scotch-Weld[™] Metal Bonder Acrylic Adhesive Bead Free 8407NS

3M[™] Scotch-Weld[™] Metal Bonder Acrylic Adhesive Bead Free 8407NS is a gray structural adhesive with high overlap shear and peel strength with good impact resistance and durability.

- Excellent strength and durability on bare metals, plastics, and other materials
- Toughened
- Outstanding peel and impact strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100179264 | A33ACRY1GAL | 3M [™] Scotch-Weld [™] Metal Bonder Acrylic Adhesive Bead Free 8407NS, Grey, Part A, 3.78 L | 4 | Canister |

3M[™] Scotch-Weld[™] Metal Bonder Acrylic Adhesive DP8407NS

3M[™] Scotch-Weld[™] Metal Bonder Acrylic Adhesive DP8407NS is a gray structural adhesive with high overlap shear and peel strength with good impact resistance and durability. This adhesive was designed to bond permanently to bare metals with minimal surface preparation, but also bonds well to wide variety of other materials, including most plastics.

- Bonds to a variety of substrates (especially bare metals) while resisting corrosion
- Withstands powder coat and paint bake cycles up to 400°F (204°C) for at least one hour
- Offers high shear, peel and impact strength for a tough and durable bond

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100179482 | DP8407NS45 | 3M [™] Scotch-Weld [™] Metal Bonder Acrylic Adhesive DP8407NS, Grey, 45 ml | 12 | Each |
| 7100179480 | DP8407NS490 | 3M [™] Scotch-Weld [™] Metal Bonder Acrylic Adhesive DP8407NS, Grey, 490 ml | 6 | Each |
| 7100105384 | 8407NSACRY5GAL | 3M [™] Scotch-Weld [™] Metal Bonder Acrylic Adhesive DP8407NS, Grey, Part B, 18.9 L | 1 | Drum |

3M[™] Scotch-Weld[™] Acrylic Adhesive DP8410NS

3M[™] Scotch-Weld[™] Acrylic Adhesive DP8410NS is a non-sag, tough, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 11 minute work life with 36 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds to a variety of surfaces, including most metals and plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100024055 | DP8410 | 3M [™] Scotch-Weld [™] Acrylic Adhesive DP8410NS, Green, 45 ml | 12 | Each |
| 7100024045 | 8410490 | 3M™ Scotch-Weld™ Acrylic Adhesive DP8410NS, Green, 490 ml | 6 | Each |

3M[™] Scotch-Weld[™] Acrylic Adhesive DP8425NS

3M[™] Scotch-Weld[™] Acrylic Adhesive DP8425NS is a non-sag, toughed, two-part acrylic adhesive. This toughened product provides improved adhesion to many plastics and metals, including those with slightly oily surfaces. It is a durable product that features a fast rate of strength build to provide structural strength in just minutes.

- 25 minute work life with 56 minutes to structural strength
- Durable bond with excellent shear, peel and high impact strength
- Bonds a variety of surfaces, including most metals and plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100078165 | 8425NS45 | 3M [™] Scotch-Weld [™] Acrylic Adhesive DP8425NS, Green, 45 ml Duo-Pak | 12 | Each |
| 7100078166 | 8425NS490 | 3M [™] Scotch-Weld [™] Acrylic Adhesive DP8425NS, Green, 490 ml Duo-Pak | 6 | Each |

Focus

3M[™] Scotch-Weld[™] Flexible Acrylic Adhesive DP8610NS

3M[™] Scotch-Weld[™] Flexible Acrylic Adhesive DP8610NS is a black, non-sag, low Odour, two-part acrylic adhesive. This high-elongation acrylic adhesive with structural strength is ideal for bonding dissimilar materials, thin panel applications where bondline read-through is a concern, or any other application where a flexible bond is needed.



- Highly flexible structural adhesive with greater than 200% elongation
- Minimizes bond line read-through and cure shrinkage to enable the use of thinner panels
- Alleviates stresses caused by dissimilar coefficients of thermal expansion

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100233359 | DP861045 | 3M [™] Scotch-Weld [™] Flexible Acrylic Adhesive DP8610NS, Black, 45 ml Duo-Pak | 12 | Each |
| 7100232802 | DP8610490 | 3M [™] Scotch-Weld [™] Flexible Acrylic Adhesive DP8610NS, Black, 490 ml Duo-Pak | 6 | Each |

MOQ = Minimum Order Quantity, OU = Order Unit



Focus

3M[™] Scotch-Weld[™] Flexible Acrylic Adhesive DP8625NS

3M[™] Scotch-Weld[™] Flexible Acrylic Adhesive DP8625NS is a black, non-sag, low Odour, two-part acrylic adhesive. This high-elongation acrylic adhesive with structural strength is ideal for bonding dissimilar materials, thin panel applications where bondline read-through is a concern, or any other application where a flexible bond is needed.



- High elongation and flexibility
- Bonds to a variety of surfaces with minimal surface prep
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100244478 | DP862545 | 3M [™] Scotch-Weld [™] Flexible Acrylic Adhesive DP8625NS, Black, 45 ml Duo-Pak | 12 | Each |
| 7100244477 | DP8625490 | 3M [™] Scotch-Weld [™] Flexible Acrylic Adhesive DP8625NS, Black, 490 ml Duo-Pak | 6 | Each |

Focus

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8705NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8705NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8705 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structrual strength down to -40°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100245036 | DP870545 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8705NS, Black, 45 ml Duo-Pak | 12 | Each |
| 7100245039 | DP8705490 | 3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8705NS, Black, 490 ml Duo-Pak | 6 | Each |

Focus

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8710NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8710NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8710 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structrual strength down to -40°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100233349 | DP871045 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8710NS, Black, 45 ml Duo-Pak | 12 | Each |
| 7100233348 | DP8710490 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8710NS, Black, 490 ml Duo-Pak | 6 | Each |





Focus

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8725NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8725NS is a black, non-sag, low Odour, non-flammable two-part structural acrylic adhesive. 8725 is an improved version of 3M's low Odour acrylic adhesives, providing enhanced impact strength, peel resistance, flexibility, low temperature performance and worker safety.

- Low Odour, non-flammable and reduced toxicological hazard profile for a safer working environment compared to typical acrylic adhesives
- Bonds to a variety of substrates, including metals, painted surfaces, plastics and composites, with minimal surface preparation required, including for slightly oily surfaces
- Low temperature performance with structrual strength down to -40°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100244858 | DP872545 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8725NS, Black, 45 ml Duo- Pak | 12 | Each |
| 7100244480 | DP8725490 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8725NS, Black, 490 ml Duo- Pak | 6 | Each |

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8805NS

3M[™] Scotch-Weld[™] Low Odor Acrylic Adhesive DP8805NS is our standard low-odor, non-sag, toughened, two-part acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 4 minute work life with 9 minutes to structural strength
- Low odor and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable finished bond with excellent shear and high impact strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100098631 | 722347 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8805NS, Green, 45 ml | 12 | Each |
| 7100097636 | 722343 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8805NS, Green, 490 ml | 6 | Each |

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8810NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8810NS is our low-Odour, non-sag, toughened, twopart acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 10 minute work life with 38 minutes to structural strength
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable bond with excellent shear, peel and high impact strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100097574 | 722346 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8810NS, Green, 45 ml | 12 | Each |
| 7100075409 | 722339 | 3M™ Scotch-Weld™ Low Odour Acrylic Adhesive DP8810NS, Green, 490 ml | 6 | Each |





3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8825NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP8825NS is our low-Odour, non-sag, toughened, twopart acrylic adhesive. This adhesive is an ideal choice for a wide variety of industrial and commercial applications since it reaches structural strength twice as fast as most other competitive acrylic adhesives with a comparable open time.

- 25 minute work life with 56 minutes structural strength
- Low Odour and non-flammable properties for a safer working environment compared to typical acrylic adhesives
- Durable finished bond with excellent shear and high impact strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100067297 | 712508 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8825NS, Green, 45 ml Duo-Pak | 12 | Each |
| 7100068120 | 723443 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP8825NS, Green, 490 ml Duo-Pak | 6 | Each |

3M[™] Scotch-Weld[™] Nylon Bonder Structural Adhesive DP8910NS

3M[™] Scotch-Weld[™] Nylon Bonder Structural Adhesive DP8910NS is a black, non-sag, non-flammable, two-part structural acrylic adhesive. 8910 creates a structural bond to polyamides (nylon), other engineered thermoplastics as well as aluminum and other metals without the need for extensive surface preparation such as plasma or flame treatment.

- Structurally bonds to nylon (polyamides) without the need for extensive surface preparation such as plasma or flame treatment
- Excellent adhesion to aluminum, stainless steel and other metals that are commonly joined to nylon
- Excellent high temperature performance at 85°C (185°F) and elevated humidity environments

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100246046 | 8910NS45 | 3M [™] Scotch-Weld [™] Nylon Bonder Structural Adhesive DP8910NS, Black, 45 ml Duo- Pak | 12 | Each |
| 7100246043 | 8910NS490 | 3M™ Scotch-Weld™ Nylon Bonder Structural Adhesive DP8910NS, Black, 490 ml Duo- Pak | 6 | Each |

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP810NS

3M[™] Scotch-Weld[™] Low Odour Acrylic Adhesive DP810NS is a non-sag, toughened two-part, room-temperature curing acrylic adhesive specially formulated to bond oily metals, plastics, and other surfaces. With lower odor and non-flammable properties, 3M[™] Scotch-Weld[™] Acrylic Adhesive DP810NS contributes to a safer work environment compared to typical acrylic adhesives.



- Low odour adhesive is ideal for any setting where harsh fumes or flammability are an issue
- Delivers non-sag formulation so adhesive stays where applied
- Provides high shear and peel strength and is toughened for impact resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100069366 | 810NS400 | 3M [™] Scotch-Weld [™] Low Odour Acrylic Adhesive DP810NS, Tan, 400 ml Duo-Pak | 6 | Each |



One Part Structural Adhesives

3M[™] Scotch-Weld[™] Epoxy Adhesive 2214 Regular

3M[™] Scotch-Weld[™] Epoxy Adhesive 2214 Regular is designed to provide high strength, higher temperature resistance and smooth bond lines. One part, 250°F (121°C) curing, 100% solids, these high performance adhesives are designed for bonding metals and many high temperature plastics such as fiberglass reinforced plastic, polyester and phenolics.

- Extreme de-aeration for very dense void free bond lines
- One part, 100% solids, heat curing adhesive
- Pliable paste consistency goes where needed with no sagging

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000079791 | 2214HT | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2214, Grey, 1 L | 2 | Canister |
| 700000811 | 22146OZ | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2214, Grey, 177 ml | 6 | Each |

3M[™] Scotch-Weld[™] Epoxy Adhesive 2214 Hi-Temp New Formula

3M[™] Scotch-Weld[™] Epoxy Adhesive 2214 Hi-Temp New Formula is designed to provide high strength, high temperature resistance and smooth bond lines. This aluminum filled product is designed for use where higher strengths are required between 180°F to 350°F (-82°C to 177°C), especially on aluminum.

- One part, 100% solids, heat curing adhesive
- Pliable paste consistency goes where needed with no sagging
- Improved performance at lower temperatures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000046474 | 2214HTNF | 3M [™] Scotch-Weld [™] Epoxy Adhesive 2214 Hi-Temp New Formula, Grey, 177 ml | 6 | Each |

3M[™] Polyurethane Wood Adhesive 5005

A high performance, one component, polyurethane adhesive that has been specifically developed for structural bonding of all types of wood, including those with a high moisture content, and also difficult to bond exotic woods.

- Solvent free
- Fast setting
- Outstanding resistance to water

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000110554 | 5005 | 3M [™] Scotch-Weld [™] Polyurethane Wood Adhesive 5005, Transparent, 310 ml | 12 | Each |
| 7000110555 | 5005N | 3M [™] Scotch-Weld [™] Polyurethane Wood Adhesive 5005, White, 310 ml | 12 | Each |



Instant Adhesives

3M[™] Scotch-Weld[™] Surface Insensitive Instant Adhesive SI Gel

3M™ Scotch-Weld™ Surface Insensitive Instant Adhesive SI Gel is a high viscosity gap filling instant adhesive.

- Surface insensitive for natural substances, leather, cork and wood.
- Gel viscosity
- Maximum gap filling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|--------|
| 7100034061 | 680211 | 3M [™] Scotch-Weld [™] Surface Insensitive Instant Adhesive SI Gel, 20 g | 20 | Each |
| 7100027510 | 664210 | 3M [™] Scotch-Weld [™] Surface Insensitive Instant Adhesive SI Gel, 300 g | 1 | Bottle |

3M[™] Scotch-Weld[™] Surface Insensitive Instant Adhesive SI1500

In order to address unique adhesive challenges, we developed 3M[™] Scotch-Weld[™] Surface Insensitive Instant Adhesive SI1500. This is a high viscosity instant adhesive that bonds rough, porous, contaminated and acidic substrates including wood, cardboard, veneer, fabric, cork and leather. This "instant glue" is ideal for filling small gaps and its rapid cure time helps keep processes moving forward

- Surface insensitive for natural substances, leather, cork and wood
- High viscosity won't migrate into seams and crevices
- Adhesive is ideal for gap filling and bonding on a variety of surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100040836 | 680241 | 3M [™] Scotch-Weld [™] Surface Insensitive Instant Adhesive SI1500, 10 × 20 gr | 10 | Each |

3M[™] Scotch-Weld[™] Metal Instant Adhesive MC100

3M™ Scotch-Weld™ Metal Instant Adhesive MC100 is a methyl based, low viscosity instant adhesive for metals.

- Bonds metals, including galvanized surfaces
- Low viscosity
- Strong, durable and long lasting bond on a variety of substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100038866 | 683841 | 3M [™] Scotch-Weld [™] Metal Instant Adhesive MC100, 500 g | 1 | Each |

3M[™] Scotch-Weld[™] Plastic & Rubber Instant Adhesive PR100

3M[™] Scotch-Weld[™] Plastic & Rubber Instant Adhesive PR100 is a low viscosity instant adhesive.

- Plastics and Rubbers
- Low viscosity
- Low viscosity adhesive is easily applied from the bottle

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100033657 | PR10020 | 3M [™] Scotch-Weld [™] Plastic & Rubber Instant Adhesive PR100, Transparent, 10 × 20 g | 10 | Each |
| 7100033726 | 679099 | 3M [™] Scotch-Weld [™] Plastic & Rubber Instant Adhesive PR100, Transparent, 10 × 50 g | 10 | Each |
| 7100033708 | 679201 | 3M [™] Scotch-Weld [™] Plastic & Rubber Instant Adhesive PR100, Transparent, 500 g | 1 | Each |

3M[™] Scotch-Weld[™] Plastic & Rubber Instant Adhesive PR1500

We formulated 3M[™] Scotch-Weld[™] Plastic & Rubber Instant Adhesive PR1500 as a high-strength, high viscosity industrial adhesive. This rapid-setting cyanoacrylate cures at room temperature and is formulated to give exceptional performance on many difficult to bond substrates such as EPDM rubber, heavily plasticized PVC, ABS and nylon.

- Fast setting formulation helps keep processes moving quickly
- Instant adhesive works well on difficult to bond surfaces such as EPDM rubber and nylon
- Thick adhesive provides gap filling capabilities

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100034078 | PR15005 | 3M [™] Scotch-Weld [™] Plastic & Rubber Instant Adhesive PR1500, Transparent, 50 g | 10 | Each |
| 7100034071 | PR1500 | 3M [™] Scotch-Weld [™] Plastic & Rubber Instant Adhesive PR1500, Transparent, 500 g | 1 | Each |

3M[™] Scotch-Weld[™] Super Fast Instant Adhesive SF100

3M[™] Scotch-Weld[™] Super Fast Instant Adhesive SF100 is a low viscosity, very fast curing instant adhesive. This cyanoacrylate adhesive relies less on surface moisture for cure speed than standard cyanocrylates. It bonds to a variety of surfaces including leather, cork, wood, plastic and rubber.

- Super fast curing keeps projects moving forward and productivity high
- Flexible container to pinch a precise drop or squeeze a steady bead with the desired length and low viscosity helps produce thin bond layer for fast, effective curing
- Bonds to many surfaces including leather, cork, wood, plastic and rubber

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100034060 | SF10020 | 3M [™] Scotch-Weld [™] Super Fast Instant Adhesive SF100, Transparent, 20 g | 10 | Each |
| 7100034525 | 680208 | 3M [™] Scotch-Weld [™] Super Fast Instant Adhesive SF100, Transparent, 50 g | 10 | Each |
| 7100033985 | SF100500 | 3M [™] Scotch-Weld [™] Super Fast Instant Adhesive SF100, Transparent, 500 g | 1 | Each |





3M[™] Scotch-Weld[™] Super Fast Instant Adhesive SF20

3M[™] Scotch-Weld[™] Super Fast Instant Adhesive SF20 is a very low viscosity, super-fast curing instant adhesive. This product meets Meets CID A-A-3097, Type II, Class 1. The low viscosity helps produce a thin bond layer for fast and effective curing on a variety of substrates including leather, cork, plastic and rubber.

- Super-fast curing keeps projects moving forward and productivity high
- Flexible container to pinch a precise drop or squeeze for a steady bead
- Bonds to a variety of substrates leather, cork, plastic and rubber

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100034279 | 680210 | 3M [™] Scotch-Weld [™] Super Fast Instant Adhesive SF20, Transparent, 20 g | 10 | Each |

3M[™] Scotch-Weld[™] General Purpose Instant Adhesive EC5

3M™ Scotch-Weld™ General Purpose Instant Adhesive EC5 is a fast setting, low viscosity instant adhesive.

- Bonds to a number of substrates
- Low viscosity
- General Purpose

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100038865 | EC5100 | 3M [™] Scotch-Weld [™] General Purpose Instant Adhesive EC5, Transparent, 100 g | 10 | Each |

Anaerobic Adhesives

3M[™] Scotch-Weld[™] Threadlocker TL42

3M[™] Scotch-Weld[™] Threadlocker TL42 provides vibration, corrosion and shock resistance for fasteners in assembled form. This medium-strength anaerobic adhesive is dispensed as a one-component product.

- Fills and seals threads completely to help stop corrosion, rust and leaks
- Helps maintain torque
- Removable with hand tools

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100034072 | 681238 | 3M [™] Scotch-Weld [™] Threadlocker TL42, Blue, 250 ml | 5 | Each |

3M[™] Scotch-Weld[™] Threadlocker TL43

3M™ Scotch-Weld™ Threadlocker TL43 is an oil tolerant, general purpose, medium torque removal threadlocker.

- Blue medium torque removal
- Medium viscosity
- Oil tolerant. Prevents corrosion, vibration and provides shock resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100034008 | 681184 | 3M [™] Scotch-Weld [™] Threadlocker TL43, Blue, 50 ml | 10 | Each |



Curing Hot Melt Adhesives

3M[™] Scotch-Weld[™] PUR Adhesive TEO31

3M[™] Scotch-Weld[™] PUR Adhesive TEO31 features rapid strength build-up and set time, producing strong bonds to a wide variety of plastics without drying or ventilation equipment. This extrudable grade adhesive is applied warm through a 3M[™] Scotch-Weld[™] PUR Adhesive Applicator or through bulk equipment specifically designed for use with PUR adhesives.

- Ideal for bonding polystyrene, polyacrylic and a wide variety of other plastics
- Rapid rate of strength build-up offers fast bonds for quick assembly
- Final cured strength over 6MPa

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 700000903 | TEO31B | 3M [™] Scotch-Weld [™] PUR Adhesive TE031, Black, 100 ml | 5 | Canister |
| 7000028589 | 579827 | 3M [™] Scotch-Weld [™] PUR Adhesive TE031, Off-White, 2 kg | 36 | Bag |
| 700000902 | TE031W | 3M [™] Scotch-Weld [™] PUR Adhesive TE031, Off-White, 295 ml | 5 | Canister |

3M[™] Scotch-Weld[™] PUR Adhesive TE100

3M[™] Scotch-Weld[™] PUR Easy Adhesive TE100 is a one-component, 100% solids, moisture curing, structural adhesive for bonding various substrates



• Medium set time.

- Creates high-strength bonds that are plasticizer resistant
- Bonds to a variety of materials, including wood and many plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 7000028590 | 478918 | 3M [™] Scotch-Weld [™] PUR Adhesive TE100, Off-White, 295 ml | 5 | Bottle |

3M[™] Scotch-Weld[™] PUR Adhesive TE200

3M[™] Scotch-Weld[™] PUR Easy Adhesive TE200 is a one-component, 100% solids, moisture curing, structural adhesive for bonding wood and select plastics.

- Fast set time.
- Thin bond lines for wood and select plastics.
- Bonds to a variety of materials, including wood and many plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 700000905 | TE200 | 3M™ Scotch-Weld™ PUR Adhesive TE200, Off-White, 295 ml | 5 | Bottle |

3M[™] Scotch-Weld[™] PUR Adhesive TS230 Off-White

3M[™] Scotch-Weld[™] PUR Adhesive TS230 Off-White achieves a fast set time and is effective across a wide range of service temperatures. It is ideal for bonding materials including wood, ABS, PC, polyacrylic, polypropylene, polyethylene, FRP, aluminum and glass. This all-in-one adhesive and dispenser solution features fast, easy clean-up and handy accessories to meet all your dispensing needs.



- Professional grade adhesive for bonding a variety of materials, including wood, plastics, glass and metal
- 2.5-minute set time
- Creates high-strength bonds that are plasticizer resistant

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 700000898 | TS230WT | 3M [™] Scotch-Weld [™] PUR Adhesive TS230, Off-White, 295 ml | 5 | Bottle |

3M[™] Scotch-Weld[™] PUR Adhesive TS230 Black

3M[™] Scotch-Weld[™] PUR Adhesive TS230 Off-White achieves a fast set time and is effective across a wide range of service temperatures. It is ideal for bonding materials including wood, ABS, PC, polyacrylic, polypropylene, polyethylene, FRP, aluminum and glass. This all-in-one adhesive and dispenser solution features fast, easy clean-up and handy accessories to meet all your dispensing needs.

- Professional grade adhesive for bonding a variety of materials, including wood, plastics, glass and metal
- 2.5-minute set time
- Creates high-strength bonds that are plasticizer resistant

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 700000906 | Т\$230ВК | 3M [™] Scotch-Weld [™] PUR Adhesive TS230, Black, 295 ml | 5 | Bottle |

Solvent-based Adhesives

3M[™] Foam Fast 74 Spray Adhesive Orange

3M[™] Foam & Fabric 74 Spray Adhesive is a fast-drying spray adhesive that bonds foam and fabric to a wide range of substrates. Its permanent bond provides fast results to keep projects moving ahead. The non-yellowing formula dispenses easily in a lace-spray pattern and applies directly onto surfaces and materials where needed.

- Designed specifically for foams and fabrics
- Dispenses with a lace-spray pattern optimized for foam bonding
- Provides professional, industrial strength for demanding applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7000116772 | SPRAY74N | 3M [™] Foam Fast 74 Spray Adhesive, Orange, 500 ml | 12 | Canister |

3M[™] Repositionable 75 Spray Adhesive

3M[™] Repositionable 75 Spray Adhesive is our versatile pressure sensitive adhesive spray, suitable for temporary holding or positioning of lightweight materials for display or prior to final assembly. It adheres in seconds, yet has an extra-long tack range that allows lifting and repositioning of materials.

- Finger-touch, targeted control ensures minimal overspray, waste, and cleanup
- Low soak-in formula allows it to bond delicate substrates without damaging the material
- Adhesive remains tacky to allow materials to be repositioned repeatedly

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7000116775 | 7666911 | 3M [™] Repositionable 75 Spray Adhesive, Transparent, 500 ml | 12 | Canister |

3M[™] Hi-Tack 76 Spray Adhesive

3M[™] Hi-Tack 76 Spray Adhesive is an industrial aerosol spray adhesive with high tack for one surface bonding applications.

- Fast aggressive tack
- Capable of one surface bonding
- Bonds many substrates such as polyethylene, rubber, fabric, felt, plastics and glass

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000116779 | 76SPRAY500 | 3M [™] Hi-Tack 76 Spray Adhesive, Creme, 500 ml | 12 | Canister |



75

3M[™] Rubber And Vinyl 80 Spray Adhesive

3M™ Rubber And Vinyl 80 Spray Adhesive is a high performance neoprene based contact aerosol spray adhesive.

- Bonds most rubber and vinyls
- High strength and high temperature resistance
- Can be used for automotive headliner

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000116787 | 80SPRAY500 | 3M [™] Rubber And Vinyl 80 Spray Adhesive, Yellow, 500 ml | 12 | Canister |

80

90

3M[™] Hi-Strength 90 Spray Adhesive

3M[™] Hi-Strength 90 Spray Adhesive is an extremely versatile, fast-drying spray adhesive that bonds strongly to a wide range of materials. Our permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense, offering a variable-width spray pattern, and applies directly onto surfaces and materials where needed.

- Provides professional, industrial strength for demanding applications
- Comes with a variable-width web spray pattern
- High strength, fast, contact type adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000116790 | SPRAY90 | 3M [™] Hi-Strength 90 Spray Adhesive, Transparent, 500 ml | 12 | Canister |

3M[™] Neoprene Contact Adhesive 10

Available in tubes, cans or pails, 3M[™] Neoprene Contact Adhesive 10 is a versatile, solvent based adhesive. It offers high immediate handling strength and good heat resistance, and is commonly used for bonding most metals and plastics. It is also suitable for large surface panel or composite lamination.

- Adheres sheet metals, such as stainless steel, aluminum, cold rolled steel and many plastics to other various substrates
- High performance laminating adhesive
- Excellent moisture and heat resistance and will perform up to up to 300°F/148°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7000080206 | SW101 | 3M [™] Neoprene Contact Adhesive 10, Light Yellow, 1 L | 6 | Canister |
| 7000080207 | SW105 | 3M [™] Neoprene Contact Adhesive 10, Light Yellow, 5 L | 2 | Canister |

3M[™] Neoprene High Performance Rubber and Gasket Adhesive 1300

3M[™] Neoprene High Performance Rubber and Gasket Adhesive 1300 is a versatile, solvent based adhesive. It offers high immediate strength and good heat resistance, and is commonly used for bonding most rubber and gasket materials. It is also suitable for large area rubber sheeting applications, bumpers and more.

- Adheres neoprene, SBR, butyl, and other types of rubbers to other various substrates
- Excellent moisture and heat resistance and will perform up to up to 300°F/148°C
- Can be used as a contact or wet-bond adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-------|
| 7100036550 | 130061 | 3M [™] Neoprene High Performance Rubber and Gasket Adhesive 1300, Yellow, 1 L | 6 | Liter |

3M[™] Neoprene High Performance Contact Adhesive 1357

3M[™] Neoprene High Performance Contact Adhesive 1357 is a high-performance contact adhesive that provides a long bonding range and initial strength.

- Extremely high strength and temperature resistance
- Fast rate of strength build
- Meets MMM-A-121

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-------|
| 7100038272 | 1357 | 3M [™] Neoprene High Performance Contact Adhesive 1357, Grey-Green, 1 L | 6 | Liter |

3M™ Neoprene High Performance Rubber and Gasket Adhesive 2141

3M™ Neoprene Rubber And Gasket Adhesive 2141 is a light yellow, high strength, solvent type synthetic rubber-based brushable adhesive

- General purpose with excellent water, grease and oil resistance
- High strength adhesive with long tack range
- Bonds various rubbers, including neoprene and butyls to most substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000046346 | EC2141Q | 3M [™] Neoprene High Performance Rubber and Gasket Adhesive 2141, Gold-Yellow, 900 ml | 12 | Canister |





3M[™] Nitrile High Performance Plastic Adhesive 1099

3M[™] Nitrile High Performance Plastic Adhesive 1099 dries quickly with an open time of approximately 40 minutes. Its assembled bonds are proven to be strong while resisting weathering as well as damage from water, oil and fuel. Additionally, it bonds well to plastics and vinyl, providing long-term adhesion as well as good resistance to plasticizer migration.



- High performance adhesive forms strong bonds on most vinyls and plastics
- Resists weathering, water, oil, plasticizer migration and fuels
- Provides strong, quick drying flexible bonds

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000079821 | 10991 | 3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 1 L | 6 | Canister |
| 7000033732 | 10995 | 3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 5 L | 10 | Liter |
| 7000033731 | 109920 | 3M [™] Nitrile High Performance Plastic Adhesive 1099, Tan, 20 L | 20 | Liter |
| 7000079905 | 1099150 | 3M™ Nitrile High Performance Plastic Adhesive 1099, Tan, 150 ml | 12 | Each |
| 7000079824 | 1099200 | 3M [™] Nitrile High Performance Plastic Adhesive 1099, Tan, 200 L, Drum | 200 | Liter |

3M[™] Nitrile High Performance Rubber and Gasket Adhesive 847

3M[™] Nitrile High Performance Rubber and Gasket Adhesive 847 is a versatile, solvent based, high performance adhesive with comparatively low viscosity for easy application. It offers both good oil resistance and good heat resistance, and is commonly used for bonding most rubber and gasket materials.



- High performance adhesive intended to bond gaskets
- Adheres to nitrile rubber (BUNA), neoprene, SBR, butyl, leather, vinyl and various rubbers
- Excellent fuel, oil and water resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000079843 | ххх | 3M [™] Nitrile High Performance Rubber and Gasket Adhesive 847HS, Brown, 20 L | 1 | Each |

3M™ Nitrile High Performance Rubber and Gasket Adhesive 847 Brown

3M[™] Nitrile High Performance Rubber and Gasket Adhesive 847 is a versatile, solvent based, high performance adhesive with comparatively low viscosity for easy application. It offers both good oil resistance and good heat resistance, and is commonly used for bonding most rubber and gasket materials.

- High performance adhesive intended to bond gaskets
- Adheres to nitrile rubber (BUNA), neoprene, SBR, butyl, leather, vinyl and various rubbers
- Excellent fuel, oil and water resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000079819 | 8471 | 3M [™] Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 1 L | 6 | Canister |
| 7000079823 | EC847 | 3M™ Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 5 L | 2 | Canister |
| 7000079817 | 84720 | 3M [™] Nitrile High Performance Rubber and Gasket Adhesive 847, Brown, 20 L, Drum | 1 | Each |

3M[™] Scotch-Weld[™] High Performance Industrial Plastic Adhesive 4693

3M[™] High Performance Industrial Plastic Adhesive 4693 is a solvent-based, synthetic rubber adhesive.

- Excellent plastic adhesive
- Long tack range
- Water and heat resistant

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000046574 | 48022 | 3M [™] Scotch-Weld [™] High Performance Industrial Plastic Adhesive 4693, Light Amber, 946 ml | 12 | Canister |

3M[™] Super 77[™] Cylinder Multipurpose Spray Adhesive

3M™ Super 77™ Multipurpose Spray Adhesive is an extremely versatile, fast-drying, and transparent spray adhesive that bonds a wide range of lightweight materials. Our fast, permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense and apply directly onto surfaces and materials where needed.

- Versatile adhesive bonds a wide range of lightweight materials
- Fast, aggressive tack and low soak-in eliminates clamping and dry time
- Extended bond time allows 15 seconds to 30 minutes after application before attaching surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7000116822 | 7720 | 3M [™] Super 77 [™] Multipurpose Spray Adhesive, Beige, 20 L Canister | 1 | Drum |
| 7100138125 | SUPER77CL20L | 3M™ Super 77™ Multipurpose Spray Adhesive, Transparent, 13.2 kg Cylinder | 1 | Each |

3M[™] Super 77[™] Multipurpose Spray Adhesive

3M™ Super 77™ Multipurpose Spray Adhesive is an extremely versatile, fast-drying, and transparent spray adhesive that bonds a wide range of lightweight materials. Our fast, permanent bond provides fast results to keep projects moving ahead. The spray formula is easy to dispense and apply directly onto surfaces and materials where needed.

- Versatile adhesive bonds a wide range of lightweight materials
- Fast, aggressive tack and low soak-in eliminates clamping and dry time
- Extended bond time allows 15 seconds to 30 minutes after application before attaching surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000116782 | SPRAY77 | 3M™ Super 77™ Multipurpose Spray Adhesive, Beige, 500 ml | 12 | Canister |







Water-based Adhesives

3M[™] Fastbond[™] Contact Adhesive 30NF

3M[™] Fastbond[™] Contact Adhesive 30NF is a water-dispersed, high-strength adhesive that has high coverage, immediate bond strength, a long bonding range and good heat resistance. Our adhesive bonds most foamed plastics, plastic laminate, wood, plywood, wood veneer, and canvas to themselves and to each other.

- Bonds most foamed plastics, plastic laminate, wood, plywood and canvas to themselves and to each other
- Creates a very high strength, high temperature resistant bond with up to a 4 hour bonding range
- Adhesive can be applied by spray, brush or roller

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000080239 | SW301 | 3M [™] Fastbond [™] Contact Adhesive 30NF, 1 L | 6 | Canister |
| 7100015462 | SW30BL1 | 3M [™] Fastbond [™] Contact Adhesive 30NF, Blue, 1 L | 6 | Canister |
| 7000080243 | SW30BL5 | 3M [™] Fastbond [™] Contact Adhesive 30NF, Blue, 5 L | 2 | Canister |
| 7000080245 | SW3020 | 3M [™] Fastbond [™] Contact Adhesive 30NF, Neutral, 20 L | 1 | Each |
| 7000080242 | 696730 | 3M [™] Fastbond [™] Contact Adhesive 30NF, White, 5 L | 2 | Canister |

3M[™] Fastbond[™] Insulation Adhesive 49

Bond lightweight materials like fiberglass insulation, felt, shoddy, paper and other materials to metal and many other surfaces with 3M[™] Scotch-Weld[™] Insulation Adhesive 49. Our adhesive is water-based, high solids, fast tacking, and pressure sensitive adhesive that's easy to spray, brush, roll or apply.



- Fast aggressive tack
- Passes ASTM E-84
- Apply to one surface and save time

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000079968 | SW492 | 3M [™] Fastbond [™] Insulation Adhesive 49, 2 L | 3 | Canister |
| 7000079967 | 49SWADH20 | 3M [™] Fastbond [™] Insulation Adhesive 49, 20 L, Drum | 20 | Liter |

3M[™] Fastbond[™] Contact Adhesive 2000NF

Apply 3M[™] Scotch-Weld[™] Contact Adhesive 2000NF for immediate bonding and handling strength without force drying. Our adhesive's benefits include high heat resistance and high strength.

- Two-part activated water based contact adhesive
- Immediate bonding and handling strength without force drying
- Offers high heat resistance, high strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7000080250 | 568312 | 3M [™] Fastbond [™] Contact Adhesive 2000NF Activator, 2 L | 3 | Canister |
| 7000080254 | 2000200 | 3M [™] Fastbond [™] Contact Adhesive 2000NF Activator, 200 L, Drum | 5 | Drum |
| 7100083354 | 708204 | 3M [™] Fastbond [™] Contact Adhesive 2000NF, Blue, 17 L, Drum | 1 | Drum |
| 7100029518 | 2000220 | 3M [™] Fastbond [™] Contact Adhesive 2000NF, Blue, 220 L Kit, 200L Base + 20L Activator | 220 | Liter |
| 7100029348 | SW2000N | 3M [™] Fastbond [™] Contact Adhesive 2000NF, Neutral, 19 L Kit | 19 | Liter |

3M[™] Fast Tack Water Based Adhesive 1000NF

3M[™] Fast Tack Water Based Adhesive 1000NF is a unique, water-based adhesive specially designed to deliver an effective combination of fast, heat resistant bonding, repositionability and high ultimate strength. Our adhesive is non-flammable, polychloroprene-free, which can contribute to lower insurance costs and increased workplace safety.



- Solventless, one-part adhesive requires no mixing for safe, easy handling
- Stable bond provides good heat resistance for long-term endurance
- Fast bonding for immediate handling strength to keep assembly processes moving

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7100011610 | 1000NFN | 3M [™] Fast Tack Water Based Adhesive 1000NF, Neutral, 3.78 L | 4 | Bottle |
| 7100025154 | 1000NF5 | 3M™ Fast Tack Water Based Adhesive 1000NF, Neutral, 18.9 L | 5 | Canister |
| 7100007793 | 1000NF | 3M [™] Fast Tack Water Based Adhesive 1000NF, Purple, 3.78 L | 4 | Each |
| 7000046563 | 1000NFP5 | 3M [™] Fast Tack Water Based Adhesive 1000NF, Purple, 18.9 L | 1 | Case |

Hot Melt Adhesives

3M[™] Hot Melt Adhesive 3731

3M[™] Hot Melt Adhesive 3731 delivers a strong, durable bond as a 100% solids, solvent-free adhesive. We formulated this adhesive to maintain a durable, reliable bond through high heat resistance, providing you with exceptional performance for a wide range of applications.

- Solvent-free and 100% solids adhesive that provides strong bonds
- Adhesive that offers long-term durability through high-temperature resistance
- Thermoplastic adhesive that offers the capability to bond to low surface energy (LSE) substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100020337 | 702319 | 3M [™] Hot Melt Adhesive 3731PG, Creme, 25 mm x 76 mm, 10 kg | 1 | Case |
| 7100009195 | 702322 | 3M [™] Hot Melt Adhesive 3731Q, Creme, 16 mm x 203 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3738

3M[™] Hot Melt Adhesive 3738 delivers a strong, reliable bond for long-term durability and exceptional performance. We formulated our Hot Melt Adhesive 3738 as a 100% solids adhesive, ready to meet the demands of a wide range of applications.

- 100% solids adhesive that delivers strong, reliable bonds
- General purpose adhesive capable of bonding many different materials
- Manages high volume applications through high delivery rate

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100020456 | 3738SLUG | 3M [™] Hot Melt Adhesive 3738, Brown, 10 kg | 1 | Case |
| 7100008738 | 3738QUAD | 3M [™] Hot Melt Adhesive 3738Q, Brown, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3747

3M[™] Hot Melt Adhesive 3747 provides a tough, reliable bond for a wide variety of applications. Formulated to have moderate heat resistance, our Hot Melt Adhesive 3747 offers you a bond that can withstand elevated temperatures without lifting or deformation, delivering long-term durability and exceptional performance.

- Get high strength durable bonding that can withstand elevated temperatures
- \bullet 100% solids adhesive that delivers strong, tough bonds
- Adheres to a wide variety of substrates to provide solutions for many applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700000877 | 3747QUAD | 3M [™] Hot Melt Adhesive 3747Q, Brown, 5 kg | 1 | Case |





40

3M[™] Hot Melt Adhesive 3748

3M[™] Hot Melt Adhesive 3748 is a tough, flexible hot melt adhesive with exceptional low temperature thermal shock properties that is able to provide optimal adhesion in fluctuating temperatures. As a 100% solids thermoplastic resin, this hot melt adhesive offers excellent durability for a wide variety of applications.



- Exhibits excellent low temperature thermal shock properties for optimal, long-term adhesion
- Good heat resistance provides durability throughout fluctuating temperatures
- Outstanding electrical properties offers an ideal solution for electrical applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100005566 | 3748SLUG | 3M [™] Hot Melt Adhesive 3748, White, 25 mm x 76 mm, 10 kg | 1 | Each |
| 7100044127 | 3748W | 3M [™] Hot Melt Adhesive 3748-B Off-White, Chips | 1 | Case |
| 700000878 | 3748QUAD | 3M [™] Hot Melt Adhesive 3748Q, White, 16 mm x 200 mm, 5 kg | 1 | Case |
| 700000879 | 3748MINI | 3M [™] Hot Melt Adhesive 3748TC, White, 6 mm x 50 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3748 VO

3M™ Hot Melt Adhesive 3748 VO is a 100% solids thermoplastic, general purpose adhesive. Our self extinguishing adhesive won't burn when the source of combustion is removed. It offers good thermal and electrical properties for printed wiring, circuit board and other electronic applications and is shock resistant for parts that are subject to vibration or other movement.

- Tough, flexible bond provides good thermal shock resistance
- Adheres to difficult-to-bond plastics such as polyolefins
- 100 percent solids bonds with negligible shrinking or contracting

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700000887 | 3748VOQ | $3 M^{ \ensuremath{^{\sim}}}$ Hot Melt Adhesive 3748V-0, Light Yellow, 6 mm x 200 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3762

3M™ Hot Melt Adhesive 3762 is a 100% is an economical, fast-setting resin solid hot melt adhesive. It's designed for general purpose applications as well as manual and corrugated carton sealing and general packaging. When heated to its specified melt point this adhesive forms an aggressive hot tack that bonds to handling strength in seconds to help maintain high-tempo productivity.

- Aggressive hot tack rapidly achieves handling strength for packaging and other applications
- Medium open time allows for positioning and fit adjustment
- Securely bonds difficult to seal substrates such as lightly waxed surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000046513 | 3762SLUG | 3M [™] Hot Melt Adhesive 3762, Tan, 25 mm x 75 mm, 11 kg | 1 | Case |
| 7100023053 | 3762QUAD | 3M [™] Hot Melt Adhesive 3762Q, Beige, 16 mm x 200 mm, 5 kg | 1 | Case |
| 7100020333 | 3762MINI | 3M [™] Hot Melt Adhesive 3762TC, Tan, 4.98 kg | 1 | Case |



3M[™] Hot Melt Adhesive 3762LM

3M[™] Hot Melt Adhesive 3762LM is a 100% solids, fast-setting hot melt adhesive designed for packaging and shipping applications. It is ideal for bonding corrugated fiberboard cartons, wood, particle board, chipboard and foam. The recommended application temperature range is 250-270°F (121-132°C).

- Aggressive hot tack rapidly achieves handling strength
- Short open time allows for fast assembly lines
- Securely bonds difficult to seal substrates such as lightly waxed surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100025246 | 3762LQM | 3M [™] Hot Melt Adhesive 3762LMQ, Beige, 16 mm x 200 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3764

Our 3M[™] Hot Melt Adhesive 3764 is a clear, 100% solids thermoplastic adhesive capable of bonding to many plastics, including polyolefin. Formulated to be flexible at low temperatures, we designed this hot melt adhesive to deliver exceptional performance for a wide range of applications and industries.

- 100% solids thermoplastic adhesive allows for adjustment over time to meet different project demands
- Formulated to be flexible at low temperatures to ease modification and positioning during application
- Impact-resistant design delivers long-term durability

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700000884 | 3764SLUG | 3M [™] Hot Melt Adhesive 3764, Transparent, 16 mm x 200 mm, 10 kg | 1 | Case |
| 7100008178 | 3764QUAD | 3M™ Hot Melt Adhesive 3764Q, Transparent, 16 mm x 200 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3779

Our 3M[™] Scotch-Weld[™] Hot Melt Adhesive 3779 is an amber colored, high performance thermoplastic adhesive formulated for strong resistance to heat, impact, fuel, and oil, and is effective for use in electronic applications such as potting and wire tacking.

- Provides high heat resistance for a durable bond
- Resilient adhesive is fuel, oil, and impact resistant
- Multi-purpose adhesive works on a variety of substrates including some plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700000888 | 3779QUAD | 3M [™] Hot Melt Adhesive 3779Q, Gold-Yellow, 16 mm x 200 mm, 5 kg | 1 | Case |



3M[™] Hot Melt Adhesive 3789

Our 3M[™] Hot Melt Adhesive 3789 is a polyamide adhesive formulated to produce an impact-, fuel- and oil-resistant bond on plastics, vinyl, wood and other surfaces. We manufacture this strong adhesive product using a 100% solids, thermoplastic resin. This hot melt also offers good heat resistance (220°F/104°C) and an open bond time that allows for fit adjustment and positioning.



- Features impact resistance for durability
- Adhesive withstands fuel and oil exposure
- Provides good heat resistance (220°F/104°C)

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100008737 | 3789QUAD | 3M [™] Hot Melt Adhesive 3789, Brown, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3792

We manufacture 3M[™] Hot Melt Adhesive 3792 with 100% solids, thermoplastic resin. It produces minimal odor when heated, helping to support a comfortable work environment. This adhesive offer fast and reliable performance when paired with our 3M[™] Hot Melt Applicators that designed to meet your handheld application needs.

- Dries clear for clean appearance
- Open bond time allows for fit adjustment and positioning
- 3792: Clear, multi-purpose for wood, fabric, upholstery, and other lightweight materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100020336 | 3792MINI | 3M [™] Hot Melt Adhesive 3792, Transparent, 5 kg | 1 | Case |
| 7100020334 | 3792SLUG | 3M [™] Hot Melt Adhesive 3792, Transparent, 25 mm x 76 mm, 10 kg | 1 | Case |
| 700000891 | 3792QUAD | 3M™ Hot Melt Adhesive 3792Q, Transparent, 16 mm x 200 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 3792LM

We manufacture 3M[™] Hot Melt Adhesive 3792 with 100% solids, thermoplastic resin. It produces minimal odor when heated, helping to support a comfortable work environment. This adhesive offer fast and reliable performance when paired with our 3M[™] Hot Melt Applicators that designed to meet your handheld application needs.

- Dries clear for clean appearance
- Open bond time allows for fit adjustment and positioning
- 3792: Clear, multi-purpose for wood, fabric, upholstery, and other lightweight materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700000880 | 3792LMQ | 3M [™] Hot Melt Adhesive 3792LMQ, Transparent, 16 mm x 200 mm, 5 kg | 1 | Case |

3M[™] Hot Melt Adhesive 6111

3M[™] Sprayable Hot Melt Adhesive 6111HT is a high-strength, high-temperature-resistant adhesive used to bond most foams, fabrics, particle board and thin metal. This non-volatile, 100% solids sprayable thermoplastic adhesive requires no drying time with minimal overspray, providing a more sustainable solution for increasing productivity. Available in blue and tan.



- Sprayable, 100% solids adhesive without volatiles
- Offers excellent adhesion to polypropylene and other low surface energy (LSE) plastics
- Extended open time allows for large surface assembly

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100023018 | 6111HT | 3M [™] Hot Melt Adhesive 6111HTB, Beige, 19 mm x 19 mm, 10 kg | 1 | Case |

Adhesive Sealants

3M[™] Adhesive Sealant 740 UV

3M™ Adhesive Sealant 740 UV is a single-component, moisture-curing, elastomeric, isocyanate-free sealant. This cosmetic sealant offers exceptional UV resistance and long term flexibility.

• High performance sealing

- Excellent UV resistance
- Permanently elastic to allow joint movement

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100077297 | 718985 | 3M [™] Adhesive Sealant 740, White, 600 ml | 12 | Each |
| 7100078074 | 718777 | 3M [™] Adhesive Sealant 740UV, White, 290 ml | 12 | Each |

3M[™] Hybrid Adhesive Sealant 760

3M[™] Hybrid Adhesive Sealant 760 is a single component, high strength, elastomeric sealant. This hybrid technology is paintable when wet and will not degrade when exposed to UV.

- Excellent adhesion
- Paintable when wet
- Above/below water line use

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000061767 | 760W600 | 3M™ Hybrid Adhesive Sealant 760, Black, 600 ml | 12 | Each |
| 7100062075 | 760BK290 | 3M [™] Hybrid Adhesive Sealant 760, Black, Plastic Cartdridge, 290 ml | 12 | Each |
| 7000061768 | 760G600 | 3M [™] Hybrid Adhesive Sealant 760, Grey, 600 ml | 12 | Each |
| 7100062076 | 760G290 | 3M™ Hybrid Adhesive Sealant 760, Grey, Plastic Cartdridge, 290 ml | 12 | Each |
| 7000032430 | 760600W | 3M [™] Hybrid Adhesive Sealant 760, White, 600 ml | 12 | Each |
| 7000061766 | 760600 | 3M [™] Hybrid Adhesive Sealant 760, White, 600 ml | 12 | Each |
| 7100062077 | 760WH290 | 3M™ Hybrid Adhesive Sealant 760, White, Plastic Cartridge, 290 ml | 12 | Each |

3M[™] Marine Adhesive Sealant 4000 UV

3M[™] Marine Adhesive Sealant 4000 UV is a one-part adhesive sealant that cures to form a firm, rubbery, waterproof seal.

- Very High Strength
- Excellent UV resistance for glazing applications

• Above/Below waterline use

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095179 | M06580 | 3M [™] Marine Adhesive Sealant 4000UV, White, 295 ml | 12 | Each |



CHARLES HALLES

3M[™] Marine Adhesive Sealant 4200FC

3M[™] Marine Fast Cure General Purpose Adhesive Sealant 4200FC is a one-part general all-purpose polyurethane that chemically reacts with moisture to give a flexible bond with good adhesion on most materials

- Forms a flexible seal on most materials
- Certified in accordance with the Marine Equipment Direction (MED 96/98/EC) (valid to 6th March 2017 on current certificate)
- Tack-free in 1 hour and typically cures in 24 hours

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000079890 | M06564 | 3M [™] Marine Adhesive Sealant 4200FC, Black, 310 ml | 12 | Each |
| 7000079889 | 4200FCWH310 | 3M [™] Marine Adhesive Sealant 4200FC, White, 310 ml | 1 | Each |

3M[™] Marine Adhesive Sealant 5200

3M[™] Marine Adhesive Sealant 5200 is extremely strong and retains its strength above or below water line. Stays flexible too - allows for structural movement. Has excellent resistance to weathering and salt water.

- Very High Strength
- Watertight bonds
- Above/Below waterline use

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100082438 | 6504 | 3M [™] Marine Adhesive Sealant 5200, Black, 295 ml, PN06504 | 12 | Each |
| 7100082436 | 6502 | 3M™ Marine Adhesive Sealant 5200, Mahogany, 295 ml, PN06502 | 12 | Each |
| 7100082716 | 06500LG1 | 3M [™] Marine Adhesive Sealant 5200, White, 295 ml, PN06500 | 12 | Each |
| 7100082441 | 6520 | 3M [™] Marine Adhesive Sealant 5200FC, White, 295 ml, PN06520 | 12 | Each |

3M[™] Polyurethane Adhesive Sealant 540

3M[™] Polyurethane Adhesive Sealant 540 is a one component, polyurethane designed as a flexible sealant for transportation, metal working and many other applications.

- Flexible product for sealing applications
- Low modulus product that is great for sealing between different materials
- Paintable when dry

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000070288 | 540B310 | 3M™ Polyurethane Adhesive Sealant 540, Black, 310 ml | 12 | Each |
| 7000070299 | 540B600 | 3M [™] Polyurethane Adhesive Sealant 540, Black, 600 ml | 12 | Each |
| 7000070298 | 546446 | 3M [™] Polyurethane Adhesive Sealant 540, Grey, 310 ml | 12 | Each |
| 7000070301 | 540G600 | 3M [™] Polyurethane Adhesive Sealant 540, Grey, 600 ml | 12 | Each |
| 7000070297 | 540W310 | 3M [™] Polyurethane Adhesive Sealant 540, White, 310 ml | 12 | Each |
| 7000077265 | 540PW310 | 3M [™] Polyurethane Adhesive Sealant 540, White, 310 ml | 12 | Each |
| 7000077193 | 540W600 | 3M [™] Polyurethane Adhesive Sealant 540, White, 600 ml | 12 | Each |

3M[™] Polyurethane Adhesive Sealant 560

Use 3M[™] Polyurethane Adhesive Sealant 560 to bond numerous materials together, including plastics, FRP, SMC, aluminium, steel, coated metal, and wood. Our very strong adhesive is ideal in circumstances where additional bonding and holding strength is required, including panel bonding and much more.

- Panel Bonding Adhesive
- Very High Strength
- Smoke and Flame Rated, 50 minute skin time

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000070289 | 560B310 | 3M [™] Polyurethane Adhesive Sealant 560, Black, 310 ml | 12 | Each |
| 7000061750 | 563562 | 3M [™] Polyurethane Adhesive Sealant 560, Grey, 310 ml | 12 | Each |
| 7000061752 | 560600 | 3M [™] Polyurethane Adhesive Sealant 560, Grey, 600 ml | 12 | Each |
| 7000061749 | 560W310 | 3M [™] Polyurethane Adhesive Sealant 560, White, 310 ml | 12 | Each |
| 7000077229 | 560W600 | 3M [™] Polyurethane Adhesive Sealant 560, White, 600 ml | 12 | Each |

3M[™] Polyurethane Adhesive Sealant Fast Cure 550

3M[™] Polyurethane Adhesive Sealant 550 FC is a fast curing polyurethane designed to seal and bond many substrates in a wide variety of applications.

- Multi-purpose adhesive sealant
- Paintable when dry
- Above/Below waterline use

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000061786 | 550310 | 3M [™] Polyurethane Adhesive Sealant Fast Cure 550, Black, 310 ml | 12 | Each |
| 7000061788 | 550FCBL | 3M™ Polyurethane Adhesive Sealant Fast Cure 550, Black, 600 ml | 12 | Each |
| 7000061787 | 550G310 | 3M [™] Polyurethane Adhesive Sealant Fast Cure 550, Green, 310 ml | 12 | Each |
| 7000061789 | 550FC600 | 3M™ Polyurethane Adhesive Sealant Fast Cure 550, Grey, 600 ml | 12 | Each |
| 7000061785 | 550W310 | 3M [™] Polyurethane Adhesive Sealant Fast Cure 550, White, 310 ml | 12 | Each |
| 7000033364 | 550W600 | 3M [™] Polyurethane Adhesive Sealant Fast Cure 550, White, 600 ml | 12 | Pack |

3M[™] Polyurethane Glass Adhesive Sealant 590

3M[™] Polyurethane Glass Adhesive Sealant 590 is a fast curing one-component, high viscosity polyurethane sealant for bonding windshields and other substrates requiring high strength.

- Structural glass bonding
- Crash tested (FMVSS 212)
- 3 Hour Drive-Away Time, 30 minute skin time

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000061753 | 590310 | 3M [™] Polyurethane Glass Adhesive Sealant 590, Black, 310 ml | 12 | Each |
| 7000077228 | 590600 | 3M [™] Polyurethane Glass Adhesive Sealant 590, Black, 600 ml | 12 | Each |





3M[™] Scotch-Seal[™] Industrial Sealant 800

3M[™] Scotch-Seal[™] Industrial Sealant 800 is a reddish brown, brushable sealant that air dries to a flexible seal. This sealant adheres to many metallic surfaces and once dried, resists water, oils detergents and fuel. Additionally, this product has a broad, useful temperature range of -65°F / -54°C to 200°F / 93°C.

- Reddish brown, brushable sealant
- Creates durable, long-lasting, flexible and rubbery seal
- 5-10 minute tack-free time for fast application

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 700000792 | 252377X | 3M [™] Scotch-Seal [™] Industrial Sealant 800, Reddish Brown, 148 ml | 36 | Bottle |

3M[™] Scotch-Seal[™] Metal Sealant 2084

3M™ Scotch-Seal™ Metal Sealant 2084 is a one-part aluminium colored, general purpose, medium viscosity sealant

- Seals metal to glass in windows and doors
- Resists weather , water, oil, and gasoline
- Water, oil and fuel resistant

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000046343 | 710365 | 3M [™] Scotch-Seal [™] Metal Sealant 2084, Silver, 148 ml Tube | 36 | Each |

3M[™] Scotch-Seal[™] Preformed Sealant Strip R79

Scotch-Seal™ Preformed Sealant Strip R79 Preformed Sealant Strip is a synthetic rubber based, permanently soft sealant in preformed strip. It develops excellent adhesion when held in compression.

- High adhesive strength with a service temperature range of -29°C to 135°C
- Excellent water and weathering resistance
- Non-curing, ready once applied

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000079848 | R796 | 3M [™] Scotch-Weld [™] Preformed Sealant Strip R79, 6 mm x 20 m | 4 | Roll |



M 5

3M[™] Scotch-Weld[™] Preformed Sealant Strip 5313

3M[™] Scotch-Weld[™] Preformed Sealant Strip 5313 is a tacky solid extrusion based on a synthetic rubber. The adhesive strength of 5313 is sufficient to cause cohesive failure of the sealer before loss of adhesion to the substrate, when pulled in tension.



- Excellent water and weather resistance
- Pliable synthetic sealant for easy sealing and gap filling
- Non-curing, ready once applied

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7000079808 | 5313 ECADH4X80 | 3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 4 mm x 80 m | 5 | Roll |
| 7000079797 | 53136 | 3M [™] Scotch-Weld [™] Preformed Sealant Strip 5313, Black, 6 mm x 5 m | 15 | Roll |
| 7000033722 | 5313220 | 3M [™] Scotch-Weld [™] Preformed Sealant Strip 5313, Black, 20 mm x 10 m x 2 mm | 10 | Roll |
| 7000079786 | 330215 | 3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 20 mm x 35 m x 1 mm | 60 | Roll |
| 7000033721 | 5313250 | 3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, 50 mm x 25 m | 4 | Roll |
| 7000079781 | EC5313F7228 | 3M™ Scotch-Weld™ Preformed Sealant Strip 5313, Black, Diameter 6 mm x 25 m | 10 | Roll |
| 7000079794 | 53152X7X15 | 3M [™] Scotch-Weld [™] Preformed Sealant Strip 5313, Black, Diameter 7 mm x 15 mm x 2 mm | 15 | Roll |

Applicator Nozzles & Tips

3M[™] Scotch-Weld[™] EPX Mixing Nozzles

Choose the 3M[™] Scotch-Weld[™] EPX Square Gold Mixing Nozzle for efficient application of our 1:1 and 2:1 200/400mL 3M[™] Scotch-Weld[™] Structural Adhesive Duo-Pak Cartridges.



- Designed for use with 1:1 and 2:1 48.5/50mL 3M[™] Scotch-Weld[™] Structural Adhesive Duo-Pak Cartridges
- Provides thorough mixing and precise placement of adhesive
- Tapered tip can be cut for bead size

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|--|-----|------|
| 7100304367 | ххх | 3M [™] Scotch-Weld [™] EPX Mixing Nozzle, Orange Helical, 10:1, 490 ml, High Throughput | 36 | Each |
| 7100262488 | MIXNOZG | 3M [™] Scotch-Weld [™] EPX Mixing Nozzle, Square Green, 1:1 and 2:1, 48.5 ml and 50 ml | 36 | Each |
| 7100148766 | MXNZLHEL | 3M [™] Scotch-Weld [™] EPX Mixing Nozzle, White Helical, 48.5 ml and 50 ml | 72 | Each |
| 7000061797 | SW200400GUNS1018T | 3M [™] Scotch-Weld [™] EPX Mixing Nozzle, for 200 ml and 400 ml cartridges | 36 | Each |

3M[™] Scotch-Weld[™] Structural Adhesive Nozzle

3M[™] Scotch-Weld[™] Structural Adhesive Nozzles are for use with 3M EPX Duo-Pak adhesives to ensure correct mixing of adhesive parts. Nozzle is matched to adhesive.

- Get high performance adhesive matching
- Use with 3M[™] EPX Duo-Pak adhesives
- Apply to low volume applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-----|
| 7000031234 | 640387 | 3M [™] High Temperature Nozzles for PUR EZ250, Sample, 5 per bag | 1 | Bag |

Electric Applicators

3M[™] Hot Melt Applicators

3M[™] Hot Melt Applicators are designed to help improve productivity, lower costs and minimize waste in industrial applications. From high volume to detail work, 3M[™] Hot Melt Applicators ensure optimum performance through melt-on-demand or progressive feed technology to meet your production deadlines.

- Lightweight designs offer easy handling
- Uniquely designed for 3M[™] Hot Melt adhesives sticks
- Meet the needs of low and high volume dispensing

| | | Ì | |
|---|---|----|---|
| | Ø | ۲ | |
| 7 | 7 | 12 | 1 |
| l | - | - | |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|--|-----|------|
| 7100255955 | APPL TC/TCQ LT240 | 3M [™] Hot Melt Applicators TC/TC-Q LT, 240V, Gen II, United Kingdom Plug | 1 | Each |
| 7100255954 | APPL TC/TCQ240 | 3M [™] Hot Melt Applicators TC/TC-Q, 240V, Gen II, United Kingdom Plug | 1 | Each |

Application Accessories

3M[™] Scotch-Weld[™] EPX Manual Applicators and Plungers

3M[™] Scotch-Weld[™] EPX Plunger for Manual Applicator. For use with both 1:1 and 2:1 200mL cartridges.

- Designed for use with our 50mL 3M[™] Scotch-Weld[™] Duo-Pak Cartridges
- Provides exact ratio of components
- Approved accessory for 3M[™] Scotch-Weld[™] EPX Applicator

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000062909 | 661375 | 3M [™] Scotch-Weld [™] EPX Manual Applicators and Plungers, Plunger, 10:1 Plunger, 45 ml | 10 | Each |

Adhesion Promoters

3M[™] Adhesion Promoter 111

3M[™] Adhesion Promoter 111 is an isopropyl alcohol based adhesion promoter for use in conjunction with 3M[™] VHB[™] Tape. It is a one step solution for cleaning and providing better and faster adhesion on surfaces that are fairly clean.

- Alcohol based adhesion promoter
- Increased tape adhesion build rate at both normal and cooler temperatures
- For use on many painted and bare metal substrates.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000049700 | 111.5GAL | 3M [™] Adhesion Promoter AP111, Transparent, 18.9 L | 1 | Canister |
| 7000001323 | 111 | 3M [™] Adhesion Promoter AP111, Transparent, 250 ml | 4 | Bottle |

3M[™] Adhesion Promoter AP596

Use 3M[™] Adhesive Promoter AP596 to for windscreen or other applications. Our colourless adhesion promoter can be used with 3M SMP sealants or silicones. It's suitable for various surfaces including tinted and fritted glass, acrylic (PMMA), polyester and PVC.

- Install windscreens quickly and easily
- Clear Fomulation
- Use with tinted and fritted glass, acrylic (PMMA), polyester and PVC

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|--------|
| 7000061757 | AP596 | 3M [™] Adhesion Promoter AP596, Transparent, 1 L | 8 | Bottle |

3M[™] All Purpose Sealant Primer P591

3M[™] All Purpose Sealant Primer P591 is a black primer that increases adhesion with polyurethane and SMP adhesive sealants.

- Promotes adhesion and improves bond integrity
- Blocks UV rays
- Used on glass with ceramic silk-screen printing and PMMA

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100158584 | P5911 | 3M [™] Fritted Glass Primer P591,1L | 8 | Each |
| 7100158521 | P591250 | 3M [™] Fritted Glass Primer P591, Black, 250 ml, Bottle | 12 | Each |





3M[™] Hybrid Structural Tape Activator

3M™ Hybrid Structural Tape Activator works with our tape as complete system that allows you to design without limits.

- Required with 3M[™] Hybrid Structural Tape.
- 3M[™] Hybrid Structural Tape blends the strength and performance of a structural adhesive.
- Solvent based liquid activator that can be applied multiple ways.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100283355 | HSTACT378 | 3M™ Hybrid Structural Tape Activator, Clear, 1 Gallon | 4 | Canister |
| 7100283265 | HSTACT284 | 3M™ Hybrid Structural Tape Activator, Clear, 1/2 Pint | 12 | Canister |

forid Structur

3M[™] Primer 9348

3M[™] Scotch-Weld[™] Primer 9348 is a primer that resists plasticizer migration.

- Transparent
- Lettering Surface Cleaning & Preparation
- Solvent based

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100132671 | 9348SOLV1L | 3M [™] Primer 9348, Transparent, 1 L | 12 | Canister |

3M[™] Scotch-Weld[™] Instant Adhesive Activator AC11

| 3M™ Scotch-Weld™ Instant Adhesive Activator AC11 is a solvent- based activator formulated to increase the cure speed of Scotch-Weld cyanoacrylate adhesives. | |
|--|--|
| Can also be used to ,fillet cure' and to cure adhesive outside of the joint Supplied in 200 ml aerosols | |

• Give instant ,on demand' curing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 7100027507 | AC11ACT200 | 3M [™] Scotch-Weld [™] Instant Adhesive Activator AC11, 200 ml | 12 | Bottle |

3M[™] Scotch-Weld[™] Metal Primer 3901

3M[™] Scotch-Weld[™] Metal Primer 3901 is a primer designed for applications using 3M[™] Scotch-Weld[™] Structural Adhesives. This film and liquid adhesive primer is able to improve metal and glass adhesion. Additional features of this primer include improved corrosion protection and resistance to environmental exposure for metal.

- Improves glass and metal adhesion and resistance to environmental exposure for epoxy and urethane structural adhesives
- Offers improved corrosion protection to metal for long-lasting performance
- Protects cleaned surfaces until bonding operations can be completed

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 700000907 | 3901SAM | 3M [™] Scotch-Weld [™] Structural Adhesive Primer 3901, Red, 240 ml | 12 | Canister |

3M[™] VHB[™] Silane Glass Primer

3M™ VHB™ Silane Glass Primer combats moisture resistance on glass from adhesives - READY FOR USE

- Combat moisture resistance on glass from adhesives
- Apply as a primer to bond to glass: Essential primer for bonding letters to glass shop fronts and for bonding glass in bathrooms or kitchens
- Recommended for use with 3M[™] VHB[™] tape

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 7000006770 | SILANE | 3M [™] VHB [™] Silane Glass Primer, Transparent, 1 L | 6 | Bottle |

3M[™] Tape Primer 94

3M[™] Tape Primer 94 is an adhesion promoter for use in conjunction with 3M[™] VHB[™] Tape that supports adhesion to critical substrates such as PE, PP, ABS, PET/PBT blends, concrete, wood, glass, metal and painted metal surfaces.



- Adhesion promoter
- Useful on a wide variety of substrates
- Durable

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|--------|
| 7000001584 | 94.1QT | 3M [™] Tape Primer 94, Yellow, 946 ml | 12 | Bottle |

3M[™] VHB[™] Tape Universal Primer UV

3M[™] VHB[™] Tape Universal Primer UV is a priming solution designed for bonding with 3M[™] VHB[™] Tapes. It enables strong, durable bonds on surfaces like polypropylene, ABS, PET/PBT blends and other difficult to stick to substrates while improving a manufacturer's environmental, health, and safety profile when compared to using 3M[™] Primer 94.

- Promotes adhesion to polypropylene, ABS, PET/PBT blends, and other difficult to stick to substrates
- Improved environmental, health, and safety profile compared to 3M[™] Primer 94
- UV indicator verifies primer application, reducing priming errors and increasing quality control

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7100116406 | UVCL0.5PT | $3 M^{ \!$ | 12 | Canister |
| 7100107033 | UVCL1QT | 3M [™] VHB [™] Tape Universal Primer UV, Light yellow with fluorescent bluish tint, 946 ml | 12 | Canister |

Cleaning Supplies

Adhes

Remov

Citrus Base

Bose Citric Removedo

for de Adhr

Ò

Cleaning Supplies

General Purpose Cleaners

3M[™] Industrial Cleaners and Adhesive Remover

3M[™] Industrial Cleaners and Adhesive Removers are ideal for helping dissolve and remove dirt, grease, tar, and many non-curing type adhesives. They clean without streaking and have proven to be excellent for surface preparation in adhesive applications. While these multipurpose cleaners are suitable for industrial use, they are also safe enough for everyday projects.

- Removes grease, oil, ink and most adhesives without the need to soak
- Provides mold-release agents
- Removes adhesive without damaging the surface underneath

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100180981 | INDCLEA5000 | $3 M^{\scriptscriptstyle \rm M}$ Industrial Cleaners and Adhesive Remover, Transparent, 5 L | 4 | Canister |

3M™ Industrial Cleaner Citrus Base

3M™ Industrial Cleaner Citrus Base is ideal for helping dissolve and remove dirt, grease, tar, and many non-curing type adhesives. They are a citrus oil based cleaner and contain no petroleum distillates.

- Helps dissolve and remove dirt, grease, tar and much more for a wide variety of industrial uses
- Removal material included
- Removes glue without damaging the underlying surface

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|----------|
| 7100178336 | INDCLEA200 | 3M [™] Industrial Cleaner Citrus Base, Transparent, 200 ml, Label1 | 12 | Canister |
| 7100178338 | INDCLEA500 | 3M™ Industrial Cleaner Citrus Base, Transparent, 500 ml | 12 | Canister |

3M[™] VHB[™] Surface Cleaner

3M[™] VHB[™] Surface Cleaner is a multi-surface cleaner, for use with 3M VHB Tape range to ensure a clean, grease free clean surface for the best bond.

- Degreasing of surfaces
- Preparation of surfaces for bonding
- Evaporates quickly leaving no residue

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|--------|
| 7000071715 | SCSACHET | 3M™ VHB™ Surface Cleaner Sachets, 100 Towels | 100 | Each |
| 7000071716 | SC1 | 3M [™] VHB [™] Surface Cleaner, 1 L | 6 | Bottle |





3M™ VHB™ Tapes

Maintain consistency from sketch to construction, and eliminate distracting, visible fasteners like screws and bolts. These strong double-sided acrylic foam tapes let you quickly and easily create a long-lasting bond that actually increases in strength over time.

Find the tape you need based on the substrate or external condition you're working with.





For Plastics and Cold Temperatures

3M[™] VHB[™] Tapes LSE Family to bond composites, TPE, TPO, PP and low surface energy (LSE) plastics without primer.

For Paints, Powder Coatings & Irregular Surfaces

3M[™] VHB[™] Tapes 5952 Family to bond a variety of paint systems, powder coatings, medium surface energy plastics and irregular surfaces. A highly conformable tape.



For Transparent Materials

3M[™] VHB[™] Tape 4910 Family designed to create durable and reliable bonds on transparent materials or wherever a clear bond is needed.

For High Temperatures and In-Process Powder Coating

3M[™] VHB[™] Tape GPH Series is designed for high temperature applications (up to +230 °C) and for multi-material bonding.



For General Purpose and Automated Applications

No-fuss permanent bonding for everyday applications with 3M[™] VHB[™] Tape RP+ Family.



For Automated Applications

3M[™] VHB[™] Extrudable Tape GP is an extrudable high strength pressuresensitive adhesive for automated bonding. It requires little or no surface preparation for some substrates and offers immediate handling strength.








3M[™] Thin Bonding Tapes

Thin bonding lets your design shine without bulky fasteners by using a virtually invisible industrial-strength bond to attach materials. Using a tape rather than a liquid adhesive allows you to customise the tape to the precise shape you need, as well as giving you production flexibility by leaving the liner in place until the second substrate is ready. Choose the double-sided tape or adhesive transfer tape you need based on your requirements.











For challenging environments - 3M[™] Acrylic Adhesive 100MP

- Exceptional shear strength even at elevated temperatures and higher peelstrength than many other adhesive families
- Very high temperature resistance
- High solvent resistance

For Metals and Easy-to Stick Surfaces 3M[™] Acrylic Adhesive 200MP

- Outstanding adhesion to metal and high surface energy materials
- Anti-lifting properties and staying power on curved surfaces
- Solvent and weather resistance

For Plastics and Hard-to Stick Surfaces - 3M[™] Acrylic Adhesive 300LSE

- High initial adhesion and shear strength even for low surface energy materials
- Outstanding performance on lightly oiled and powder coated surfaces
- Good chemical and moisture resistance

For Hard-to Bond Textures - 3M[™] Acrylic Adhesive 300MP

- High initial adhesion and shear strength on textured or rough surfaces, such as foam and textiles
- Particularly soft and free-flowing pressure sensitive adhesive

General purpose solution - 3M™ GPT-020 / GPT-020F Double Coated Tape

- Ideal general purpose industrial thin bond tape for a wide range of applications
- Adhesion to a wide variety of substrates ranging from metals to some plastics

Automation Lite – Scotch® ATG System

- Paper and packaging bonding
- Proven tool for the quick application of adhesive transfer tapes
- Wide range of adhesive tapes to suit almost any application



VHB Tapes

Focus

3M[™] VHB[™] Extrudable Tape GP

3M[™] VHB[™] Extrudable Tape GP is a high strength pressure-sensitive adhesive that provides immediate handling strength, fast and easy application, and delivers the durability that customers require. This new bonding solution, tailor-made for automation, reimagines tape, providing a faster, simplified, more sustainable solution for manufacturing processes. It provides excellent adhesion to many substrates – in some cases with little or no surface preparation – and has a stretch release feature that allows clean adhesive removal for rework or recycling of parts.



- Bond line can be laid in variable widths, thicknesses and profiles
- Bond line can be closed immediately (hot) or after weeks (cold)
- Stretch release technology allows easy removal for reworkability and reduced scrap

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100268065 | VHBEXTRUD | 3M [™] VHB [™] Extrudable Tape GP, Black, 8.5 mm x 298 m | 1 | Each |

Focus

3M[™] VHB[™] Tape LSE-060WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape LSE-060WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.



- White, 0.6 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100143322 | LSE06012 | 3M [™] VHB [™] Tape LSE-060WF, White, 12 mm x 33 m, 0.6 mm | 18 | Roll |
| 7100154121 | LSE060193 | $3M^{\scriptscriptstyle \rm M}$ VHB $^{\scriptscriptstyle \rm M}$ Tape LSE-060WF, White, 19 mm x 3 m, 0.6 mm, 48/CV | 48 | Roll |
| 7100143327 | LSE06019 | 3M [™] VHB [™] Tape LSE-060WF, White, 19 mm x 33 m, 0.6 mm | 14 | Roll |
| 7100143305 | LSE06025 | 3M [™] VHB [™] Tape LSE-060WF, White, 25 mm x 33 m, 0.6 mm | 7 | Roll |
| 7100247156 | LSE0601150 | 3M [™] VHB [™] Tape LSE-060WF, White, 1150 mm x 33 m, 0.6 mm | 1 | Roll |

Focus

3M[™] VHB[™] Tape LSE-110WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M[™] VHB[™] Tape LSE-110WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.

- White, 1.1 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- Superior outdoor performance, UV and solvent resistance

|) | |
|---|--|
| | |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100143324 | LSE11012 | 3M [™] VHB [™] Tape LSE-110WF, White, 12 mm x 33 m, 1.1 mm | 18 | Roll |
| 7100154122 | LSE110193 | 3M [™] VHB [™] Tape LSE-110WF, White, 19 mm x 3 m, 1.1 mm, 48/CV | 48 | Roll |
| 7100288303 | LSE110WF1911 | $3M^{\mathbb{M}}$ VHB $^{\mathbb{M}}$ Tape LSE-110WF, White, 19 mm x 11 m, 1.1 mm | 4 | Roll |
| 7100143325 | LSE11019 | 3M [™] VHB [™] Tape LSE-110WF, White, 19 mm x 33 m, 1.1 mm | 14 | Roll |
| 7100143321 | LSE11025 | 3M [™] VHB [™] Tape LSE-110WF, White, 25 mm x 33 m, 1.1 mm | 7 | Roll |
| 7100247155 | LSE1101150 | 3M [™] VHB [™] Tape LSE-110WF, White, 1150 mm x 33 m, 1.1 mm | 1 | Roll |

Focus

3M[™] VHB[™] Tape LSE-160WF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape LSE-160WF offers a superior bonding performance without primer on difficult to bond substrates such as PP, TPO, TPE, and composite materials.



- White, 1.6 mm, modified acrylic adhesive with a conformable, acrylic foam core
- Bonds LSE plastics and composites without primer
- \bullet Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100143306 | LSE16012N | 3M [™] VHB [™] Tape LSE-160WF, White, 12 mm x 33 m, 1.6 mm | 18 | Roll |
| 7100154123 | LSE160193 | 3M [™] VHB [™] Tape LSE-160WF, White, 19 mm x 3 m, 1.6 mm, 48/CV | 96 | Roll |
| 7100143328 | LSE16019 | 3M [™] VHB [™] Tape LSE-160WF, White, 19 mm x 33 m, 1.6 mm | 14 | Roll |
| 7100143323 | LSE16WF25 | 3M [™] VHB [™] Tape LSE-160WF, White, 25 mm x 33 m, 1.6 mm | 7 | Roll |

3M[™] VHB[™] Tapes GPH-060GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape GPH-060GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.



- Grey, 0.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal,
- aluminium, ABS, etc.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100100753 | 722172 | 3M [™] VHB [™] Tape GPH-060GF, Grey, 12 mm x 33 m, 0.6 mm | 18 | Roll |
| 7100101623 | 721998 | 3M™ VHB™ Tape GPH-060GF, Grey, 19 mm x 3 m, 0.6 mm | 48 | Roll |
| 7100100752 | 722171 | $3M^{\ensuremath{^{\!\!\!M}}}$ VHB $^{\ensuremath{^{\!\!\!M}}}$ Tape GPH-060GF, Grey, 19 mm x 33 m, 0.6 mm | 14 | Roll |
| 7100101042 | 722170 | 3M™ VHB™ Tape GPH-060GF, Grey, 25 mm x 33 m, 0.6 mm | 7 | Roll |
| 7100297127 | GPH060115033 | $3M^{\ensuremath{^{\diamond}}}$ VHB $^{\ensuremath{^{\diamond}}}$ Tape GPH-060GF, Grey, 1150 mm x 33 m, 0.6 mm | 1 | Roll |
| 7100297129 | GPH060115066 | 3M [™] VHB [™] Tape GPH-060GF, Grey, 1150 mm x 66 m, 0.6 mm | 1 | Roll |

3M[™] VHB[™] Tapes GPH-110GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ GPH Tapes GPH-110GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.



- Grey, 1.1 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal,
- aluminium, ABS, etc.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100101624 | 721999 | 3M [™] VHB [™] Tape GPH-110GF Grey, 19 mm x 3 m, 1.1 mm | 48 | Roll |
| 7100099836 | 722162 | 3M [™] VHB [™] Tape GPH-110GF, Grey, 12 mm x 33 m, 1.1 mm | 18 | Roll |
| 7100227350 | GPH1101911 | 3M™ VHB™ Tape GPH-110GF, Grey, 19 mm x 11 m, 1.1 mm | 4 | Roll |
| 7100099833 | 722164 | 3M [™] VHB [™] Tape GPH-110GF, Grey, 19 mm x 33 m, 1.1 mm | 14 | Roll |
| 7100099834 | 722163 | 3M™ VHB™ Tape GPH-110GF, Grey, 25 mm x 33 m, 1.1 mm | 7 | Roll |
| 7100297050 | GPH1101150 | 3M™ VHB™ Tape GPH-110GF, Grey, 1150 mm x 33 m, 1.1 mm | 1 | Roll |
| 7100297128 | GPH110115066 | 3M [™] VHB [™] Tape GPH-110GF, Grey, 1150 mm x 66 m, 1.1 mm | 1 | Roll |

3M[™] VHB[™] Tapes GPH-160GF

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M[™] VHB[™] Tape GPH-160GF is designed for bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.



- Grey, 1.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Excellent temperature resistance when bonding metal parts prior to heat cured paint processing
- Strong and durable bonds to a broad range of high-and medium surface-energy substrates like metal, aluminium, ABS, etc.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100101043 | 722168 | 3M [™] VHB [™] Tape GPH-160GF, Grey, 12 mm x 33 m, 1.6 mm | 18 | Roll |
| 7100100757 | | 3M [™] VHB [™] Tape GPH-160GF, Grey, 19 mm x 33 m, 1.6 mm | 14 | Roll |
| 7100101045 | 722166 | 3M [™] VHB [™] Tape GPH-160GF, Grey, 25 mm x 33 m, 1.6 mm | 7 | Roll |
| 7100297479 | GPH160112033 | 3M™ VHB™ Tape GPH-160GF, Grey, 1120 mm x 33 m, 1.6 mm | 1 | Roll |

3M[™] VHB[™] Tape 4926

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4926. It is a grey, 0.4 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high and medium surface energy substrates..

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029043 | 4926610 | 3M [™] VHB [™] Tape 4926P, Grey, 610 mm x 33 m, 0.38 mm | 1 | Roll |

3M[™] VHB[™] Tape 4936P

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M[™] VHB[™] Tape 4936 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 0.6 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000072384 | 493612 | 3M | 6 | Roll |
| 7000072386 | 4936P19 | 3M | 4 | Roll |
| 7000072387 | 493625 | 3M | 3 | Roll |
| 7000072379 | 4936P300 | 3M [™] VHB [™] Tape 4936P, Grey, 300 mm x 33 m, 0.6 mm | 1 | Roll |
| 7000072381 | 49361220 | 3M [™] VHB [™] Tape 4936P, Grey, 1220 mm x 33 m, 0.6 mm | 1 | Roll |





3M™ VHB™ Tape 4941

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4941 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.



- Grey, 1.1 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000072414 | 49415033 | 3М | 24 | Roll |
| 7000072411 | 494125 | 3M™ VHB™ Tape 4941P, Grey, 25 mm x 33 m, 1.1 mm | 3 | Roll |
| 7000072413 | 494138 | 3M [™] VHB [™] Tape 4941P, Grey, 38 mm x 33 m, 1.1 mm | 30 | Roll |
| 7000072399 | 4941P300 | 3M™ VHB™ Tape 4941P, Grey, 300 mm x 33 m, 1.1 mm | 1 | Roll |

3M[™] VHB[™] Tape 4941F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4941 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 1.1 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000072415 | 4941F12 | ЗМ | 6 | Roll |
| 7000072416 | 4941F19 | 3M [™] VHB [™] Tape 4941F, Grey, 19 mm x 33 m, 1.1 mm | 4 | Roll |
| 7000033132 | 49411200 | 3M [™] VHB [™] Tape 4941F, Grey, 1200 mm x 33 m, 1.1 mm | 1 | Roll |

3M[™] VHB[™] Tape 4956

Dream, Design, Deliver with 3M[™] VHB[™] Tape 4956. It is a gray, 0.062 in (1.6 mm), multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- \bullet Can replace mechanical fasteners (rivets, welds, screws) or liquid adhesives

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072511 | 4956F19 | 3M [™] VHB [™] Tape 4956F, Grey, 19 mm x 33 m, 1.5 mm | 4 | Roll |
| 7000072512 | 4956F2/4 | 3M [™] VHB [™] Tape 4956F, Grey, 25 mm x 33 m, 1.5 mm | 3 | Roll |
| 7000072502 | 219753 | 3M [™] VHB [™] Tape 4956P, Grey, 12 mm x 33 m, 1.5 mm | 6 | Roll |
| 7000072500 | 4956P295 | 3M [™] VHB [™] Tape 4956P, Grey, 295 mm x 33 m, 1.5 mm | 1 | Roll |

3M™ VHB™ Tape 4991

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4991 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Grey, 2.3 mm, acrylic adhesive with a conformable, acrylic foam core
- Offers a good plastisiser resistance
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like aluminium, stainless steel, galvanised steel, polycarbonate, ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000072529 | 4991F6 | 3M [™] VHB [™] Tape 4991, Grey, 6 mm x 16.5 m, 2.3 mm | 96 | Roll |
| 7000072530 | 49919 | 3M [™] VHB [™] Tape 4991F, Grey, 9 mm x 16.5 m, 2.3 mm | 8 | Roll |
| 7000033141 | 499112 | 3M [™] VHB [™] Tape 4991F, Grey, 12 mm x 16.5 m, 2.3 mm | 6 | Roll |
| 7100123358 | 4991F19ST | 3M [™] VHB [™] Tape 4991F, Grey, 19 mm x 5.5 m, 2.5 mm, Blister | 4 | Roll |
| 7000033143 | 499119 | 3M [™] VHB [™] Tape 4991F, Grey, 19 mm x 16.5 m, 2.3 mm | 4 | Roll |
| 7000072533 | 499125 | 3M [™] VHB [™] Tape 4991F, Grey, 25 mm x 16.5 m, 2.3 mm | 3 | Roll |
| 7000033144 | 563564 | 3M [™] VHB [™] Tape 4991F, Grey, 1200 mm x 16.5 m, 2.3 mm | 1 | Roll |

3M[™] VHB[™] Tape 4947

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4947. It is black, 1.1 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high and medium surface energy substrates.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000072464 | 4947F12 | ЗМ | 6 | Roll |
| 7000072465 | 4947F19 | 3M | 4 | Roll |
| 7000072466 | 4947F25 | 3M | 3 | Roll |
| 7000006778 | 4947FLOG | 3M [™] VHB [™] Tape 4947F, Black, 295 mm x 33 m, 1.1 mm | 4 | Roll |

3M[™] VHB[™] Tape 5906

3M[™] VHB[™] Tape 5906F Dream, Design, Deliver It is a black, 0.15 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100193935 | 5906TAPE1168X66 | 3M [™] VHB [™] Tape 5906F, Black, 1168 mm x 66 m, 0.3 mm | 1 | Roll |

3M[™] VHB[™] Tape 5907

3M[™] VHB[™] Tape 5907F, Black Dream, Design, Deliver . It is a black, 0.2 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100193900 | 59071168 | 3M [™] VHB [™] Tape 5907F, Black, 1168 mm x 66 m, 0.3 mm | 1 | Roll |

3M[™] VHB[™] Tape 5908

3M[™] VHB[™] Tape 5908F Dream, Design, Deliver . It is a black, 0.25 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100195214 | 5908TAPE1168X66 | 3M [™] VHB [™] Tape 5908F, Black, 1168 mm x 66 m, 0.3 mm | 1 | Roll |

3M[™] VHB[™] Tape 5909

3M[™] VHB[™] Tape 5909F Dream, Design, Deliver . It is a black, 0.3 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints. It's ideal fo low profile bonding.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100193936 | 5909TAPE1168X66 | 3M [™] VHB [™] Tape 5909F, Black, 1168 mm x 66 m, 0.3 mm | 1 | Roll |





3M[™] VHB[™] Tape 5915

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 5915. It is a black, 0.4 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its visco-elasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049448 | 59151168 | 3M™ VHB™ Tape 5915, Black, 1168 mm x 33 m, 0.4 mm | 1 | Roll |

3M[™] VHB[™] Tape 5925F

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 5925F. It is a black, 0.6 mm thick, modified acrylic adhesive with a very conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including most powder coated paints.

- Black, 0.6 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100211824 | 5925F6 | 3M [™] VHB [™] Tape 5925F, Black, 6 mm x 66 m, 0.6 mm | 12 | Roll |
| 7100211819 | 5925F12MMX33M | 3M™ VHB™ Tape 5925F, Black, 12 mm x 33 m, 0.6 mm | 5 | Roll |
| 7100211820 | 5925F16MMX33M | 3M [™] VHB [™] Tape 5925F, Black, 16 mm x 33 m, 0.6 mm | 90 | Roll |
| 7100211821 | 5925F19MMX33M | 3M™ VHB™ Tape 5925F, Black, 19 mm x 33 m, 0.6 mm | 4 | Roll |
| 7100211822 | 5925F25MMX33M | 3M™ VHB™ Tape 5925F, Black, 25 mm x 33 m, 0.6 mm | 3 | Roll |
| 7100211816 | 5925F295 | 3M™ VHB™ Tape 5925F, Black, 295 mm x 33 m, 0.6 mm | 1 | Roll |
| 7100211815 | 5925F1190MMX33M | 3M™ VHB™ Tape 5925F, Black, 1190 mm x 33 m, 0.6 mm | 1 | Roll |



3M[™] VHB[™] Tape 5952F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5952 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Black, 1.1 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100211828 | 5952F6MMX33M | 3M [™] VHB [™] Tape 5952F, Black, 6 mm x 33 m, 1.1 mm | 10 | Roll |
| 7100211830 | 5952F9 | 3M [™] VHB [™] Tape 5952F, Black, 9 mm x 33 m, 1.1 mm | 8 | Roll |
| 7100211831 | 5952F12MMX33M | 3M [™] VHB [™] Tape 5952F, Black, 12 mm x 33 m, 1.1 mm | 6 | Roll |
| 7100211832 | 5952F15 | 3M™ VHB™ Tape 5952F, Black, 15 mm x 33 m, 1.1 mm | 16 | Roll |
| 7100211813 | 5952F19MMX3M | 3M [™] VHB [™] Tape 5952F, Black, 19 mm x 3 m, 1.1 mm | 48 | Roll |
| 7100211833 | 5952F19MMX33M | 3M™ VHB™ Tape 5952F, Black, 19 mm x 33 m, 1.1 mm | 4 | Roll |
| 7100211834 | 5952F25MMX33M | 3M [™] VHB [™] Tape 5952F, Black, 25 mm x 33 m, 1.1 mm | 3 | Roll |
| 7100211827 | 5952F305MMX33M | 3M™ VHB™ Tape 5952F, Black, 305 mm x 33 m, 1.1 mm | 1 | Roll |
| 7100211826 | 5952F1220MMX33M | 3M [™] VHB [™] Tape 5952F, Black, 1220 mm x 33 m, 1.1 mm | 1 | Roll |

3M[™] VHB[™] Tape 5952P

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 5952 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.



- Black, 1.1 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7010012127 | 5952PBK1220 | 3M [™] VHB [™] Tape 5952P, Black, 1220 mm x 33 m, 1.1 mm, Paper Liner | 1 | Roll |

3M[™] VHB[™] Flame Retardant Tape 5958FR

Dream, Design, Deliver with our 3M[™] VHB[™] Flame Retardant Tape 5958FR. It is a black, 1 mm thick, modified acrylic adhesive with a very conformable, foam core. The fast and easy to use permanent bonding method provides high strength, long-term durability and is flame retardant. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces, including many powder coated paints.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability and is flame retardant
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049210 | 5958FR25 | 3M [™] VHB [™] Flame Retardant Tape 5958RF, Black, 25 mm x 33 m, 1.0 mm | 9 | Roll |
| 7000049257 | 5858FR47 | 3M™ VHB™ Flame Retardant Tape 5958RF, Black, 1194 mm x 33 m, 1.0 mm | 1 | Roll |



3M[™] VHB[™] Tape 5962F

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M[™] VHB[™] Tape 5962 provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces.

- Black, 1.5 mm, modified acrylic adhesive and very conformable acrylic foam core
- Excellent adhesion to the widest variety of surfaces, including most powder coated paints, metals, glass, sealed wood, acrylic, polycarbonate, ABS
- Superior outdoor performance, UV and solvent resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|--|-----|------|
| 7100211840 | 5962F25MMX33M | 3M [™] VHB [™] Tape 5962F, Black 25 mm x 33 m, 1.6 mm | 3 | Roll |
| 7100211838 | 5962F12 | 3M [™] VHB [™] Tape 5962F, Black, 12 mm x 33 m, 1.6 mm | 6 | Roll |
| 7100223836 | 5962F19ST | 3M [™] VHB [™] Tape 5962F, Black, 19 mm x 8 m, 1.6 mm, Blister | 4 | Roll |
| 7100211839 | 5962F19MMX33M | 3M [™] VHB [™] Tape 5962F, Black, 19 mm x 33 m, 1.6 mm | 4 | Roll |
| 7100211836 | 5962F305MMX33M | 3M [™] VHB [™] Tape 5962F, Black, 305 mm x 33 m, 1.6 mm | 4 | Roll |
| 7100211835 | 5962F1220MMX33M | 3M [™] VHB [™] Tape 5962F, Black, 1220 mm x 33 m, 1.6 mm | 1 | Roll |

3M[™] VHB[™] Tape 4905

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M[™] VHB[™] Tape 4905 is designed for bonding transparent materials or wherever a clear bond is needed.

- Transperent, 0.5 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000033113 | 4905F666 | 3M [™] VHB [™] Tape 4905F, Transparent, 6 mm x 66 m, 0.5 mm | 12 | Roll |
| 7000072260 | 4905F933 | 3M™ VHB™ Tape 4905F, Transparent, 9 mm x 33 m, 0.5 mm | 8 | Roll |
| 7000072265 | 4905F12 | 3M [™] VHB [™] Tape 4905F, Transparent, 12 mm x 66 m, 0.5 mm | 6 | Roll |
| 7000072262 | 4905F193 | 3M™ VHB™ Tape 4905F, Transparent, 19 mm x 33 m, 0.5 mm | 4 | Roll |
| 7000072266 | 4905F19 | 3M™ VHB™ Tape 4905F, Transparent, 19 mm x 66 m, 0.5 mm | 4 | Roll |
| 7000072267 | 4905F25 | 3M™ VHB™ Tape 4905F, Transparent, 25 mm x 66 m, 0.5 mm | 3 | Roll |
| 7000072248 | 4905F285 | 3M [™] VHB [™] Tape 4905F, Transparent, 285 mm x 66 m, 0.5 mm | 1 | Roll |
| 7000033111 | 4905F114 | 3M [™] VHB [™] Tape 4905F, Transparent, 1140 mm x 66 m, 0.5 mm | 1 | Roll |
| 7000072252 | 4905P15 | 3M [™] VHB [™] Tape 4905P, Transparent, 15 mm x 66 m, 0.5 mm | 5 | Roll |
| 7000072257 | 49051933 | 3M [™] VHB [™] Tape 4905P, Transparent, 19 mm x 33 m, 0.5 mm | 4 | Roll |
| 7000072254 | 4905P25 | 3M™ VHB™ Tape 4905P, Transparent, 25 mm x 66 m, 0.5 mm | 48 | Roll |
| 7000072270 | 4905P285 | 3M [™] VHB [™] Tape 4905P, Transparent, 285 mm x 33 m, 0.5 mm | 1 | Roll |
| 7000072247 | 4905P1220 | 3M™ VHB™ Tape 4905P, Transparent, 1220 mm x 6 m, 0.5 mm | 1 | Roll |

3M[™] VHB[™] Tape 4910

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4910 is designed for bonding transparent materials or wherever a clear bond is needed.

- Transparent, 1.0 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000033115 | 4910F6 | 3M™ VHB™ Tape 4910F, Transparent, 6 mm x 33 m, 1.0 mm | 12 | Roll |
| 7000072289 | 4910F9 | 3M [™] VHB [™] Tape 4910F, Transparent, 9 mm x 33 m, 1.0 mm | 8 | Roll |
| 7000033116 | 4910F12 | 3M [™] VHB [™] Tape 4910F, Transparent, 12 mm x 33 m, 1.0 mm | 6 | Roll |
| 7000072294 | 4910FSAM | 3M [™] VHB [™] Tape 4910F, Transparent, 19 mm x 3 m, 1.0 mm | 48 | Roll |
| 7100123355 | 4910F19ST | 3M [™] VHB [™] Tape 4910F, Transparent, 19 mm x 11 m, 1.0 mm, Blister | 4 | Roll |
| 7000033117 | 4910F19 | 3M [™] VHB [™] Tape 4910F, Transparent, 19 mm x 33 m, 1.0 mm | 4 | Roll |
| 7100032063 | 4910F25 | 3M™ VHB™ Tape 4910F, Transparent, 25 mm x 33 m, 1.0 mm | 3 | Roll |
| 7000072292 | 4910F38 | 3M [™] VHB [™] Tape 4910F, Transparent, 38 mm x 33 m, 1.0 mm | 30 | Roll |
| 7000072276 | 4910F300 | 3M [™] VHB [™] Tape 4910F, Transparent, 300 mm x 33 m, 1.0 mm | 4 | Roll |
| 7100071754 | 4910F1210 | 3M™ VHB™ Tape 4910F, Transparent, 1210 mm x 33 m, 1.0 mm | 1 | Roll |

3M[™] VHB[™] Tape 4915

The strong, fast and easy way to create durable and reliable bonds, eliminating rivets, screws, bolts and welds. 3M™ VHB™ Tape 4915 is designed for bonding transparent materials or wherever a clear bond is needed.



- Transparent, 1.5 mm, general purpose acrylic adhesive and firm acrylic foam core
- Clear construction allowing joining of transparent material and virtually invisible bondline
- Strong and durable bonds to a wide variety of high to medium surface energy substrates like paints, metals and glass, acryl glass (PMMA), polycarbonate

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000033123 | 49156 | 3M [™] VHB [™] Tape 4915F, Transparent, 6 mm x 25 m, 1.5 mm | 12 | Roll |
| 7000043127 | 491512 | 3M™ VHB™ Tape 4915F, Transparent, 12 mm x 25 m, 1.5 mm | 6 | Roll |
| 7000072311 | 491519 | 3M [™] VHB [™] Tape 4915F, Transparent, 19 mm x 25 m, 1.5 mm | 4 | Roll |
| 7000072309 | 4915285 | 3M™ VHB™ Tape 4915F, Transparent, 285 mm x 25 m, 1.5 mm | 1 | Roll |

3M[™] VHB[™] Tape 4918

3M[™] VHB[™] Tape 4918 is a clear, 2.0mm thick, acrylic VHB tape. It is colourless making it ideal for bonding transparent materials or for applications where a colored bond line is unacceptable.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth, even edges are invisible due to it's transparency

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000033126 | 49186 | 3M [™] VHB [™] Tape 4918F, Transparent, 6 mm x 16.5 m, 2.0 mm | 12 | Roll |
| 7000072319 | 49189 | 3M [™] VHB [™] Tape 4918F, Transparent, 9 mm x 16.5 m, 2.0 mm | 8 | Roll |
| 7000043128 | 491812 | 3M [™] VHB [™] Tape 4918F, Transparent, 12.0 mm x 16.5 m, 2.0 mm | 6 | Roll |
| 7000033127 | 491819 | 3M [™] VHB [™] Tape 4918F, Transparent, 19 mm x 16.5 m, 2.0 mm | 4 | Roll |
| 7000072321 | 4918F | 3M [™] VHB [™] Tape 4918F, Transparent, 25 mm x 16.5 m, 2.0 mm | 3 | Roll |
| 7000072317 | 4918285 | 3M [™] VHB [™] Tape 4918F, Transparent, 285 mm x 16.5 m, 2.0 mm | 1 | Roll |

Focus

3M[™] VHB[™] Tape RP+040GF

Dream, Design, Deliver with 3M[™] VHB[™] Tape RP+040GF. This grey 0.4 mm (16 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100309730 | RP+40GF19SAM | 3M [™] VHB [™] Tape RP+040GF, 19 mm x 3 m | 58 | Roll |
| 7100285875 | RP+40GF1120 | 3M™ VHB™ Tape RP+040GF, Grey, 1120 mm x 66 m, 0.4 mm, Film Liner | 1 | Roll |

Focus

3M[™] VHB[™] Tape RP+080GF

Dream, Design, Deliver with 3M[™] VHB[™] Tape RP+080GF. This grey 0.8 mm (32 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100309731 | RP+80GF19SAM | 3M [™] VHB [™] Tape RP+080GF, 19 mm x 3 m | 58 | Roll |
| 7100285874 | RP+80GF1120 | 3M [™] VHB [™] Tape RP+080GF, Grey, 1120 mm x 66 m, 0.8 mm, Film Liner | 1 | Roll |

Focus

3M[™] VHB[™] Tape RP+230GF

Dream, Design, Deliver with 3M[™] VHB[™] Tape RP+230GF. This grey 2.3 mm (90 mil) tape features a multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy-to-use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond a variety of surfaces, with temperature resistance of 230°C for up to 4 hours.



- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Virtually invisible fastening keeps surfaces smooth
- Can replace mechanical fasteners (rivets, welding, screws) or liquid adhesives in general purpose applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100309729 | RP+230GF19SAM | 3M [™] VHB [™] Tape RP+230GF, 19 mm x 3 m | 58 | Roll |
| 7100285876 | RP+230GF1120 | 3M™ VHB™ Tape RP+230GF, Grey, 1120 mm x 33 m, 2.3 mm, Film Liner | 1 | Roll |

3M[™] VHB[™] Tape RP+040GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+040GP. It is a grey, 0.4 mm (16 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 0.4 mm (16 mil), multi-purpose adhesive and conformable acrylic foam core for good performance
- in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100309728 | RP+40GP19SAM | 3M [™] VHB [™] Tape RP+040GP, 19 mm x 3 m | 58 | Roll |
| 7100307059 | RP+040GP1120 | 3M [™] VHB [™] Tape RP+040GP, 1120 mm x 66 m | 1 | Roll |

3M[™] VHB[™] Tape RP+060GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+060GP. It is a grey, 25 mil (0.6 mm), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 0.6 mm (25 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100309727 | RP+60GP19SAM | 3M [™] VHB [™] Tape RP+060GP, 19 mm x 3 m | 58 | Roll |
| 7100307057 | RP+060GP1120 | 3M™ VHB™ Tape RP+060GP, 1120 mm x 66 m | 1 | Roll |

3M[™] VHB[™] Tape RP+080GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+080GP. It is a grey, 0.8 mm (32 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

• Fast and easy-to-use permanent bonding method provides high strength and long-term durability.

• Grey, 0.8 mm (32 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications.

• Virtually invisible fastening keeps surfaces smooth.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100309969 | RP+80GP19SAM | 3M [™] VHB [™] Tape RP+080GP, 19 mm x 3 m | 58 | Roll |
| 7100307226 | RP+080GP1120 | 3M [™] VHB [™] Tape RP+080GP, 1120 mm x 66 m | 1 | Roll |







3M[™] VHB[™] Tape RP+110GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+110GP. It is a grey, 1.1 mm (45 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its viscoelasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability.
- Grey, 1.1 mm (45 mil), multi-purpose adhesive and conformable acrylic foam core for good performance
- in a variety of applications.
- Virtually invisible fastening keeps surfaces smooth.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100310930 | RP+110GP19SAM | 3M [™] VHB [™] Tape RP+110GP, 19 mm x 3 m | 58 | Roll |
| 7100307034 | RP+110GP1120 | 3M [™] VHB [™] Tape RP+110GP, 1120 mm x 66 m | 1 | Roll |

3M[™] VHB[™] Tape RP+160GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+160GP. It is a grey, 1.6 mm (62 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 1.6 mm (62 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100309949 | RP+160GP19SAM | 3M™ VHB™ Tape RP+160GP, 19 mm x 3 m | 58 | Roll |
| 7100307062 | RP+160GP1120 | 3M™ VHB™ Tape RP+160GP, 1120 mm x 33 m | 1 | Roll |

3M[™] VHB[™] Tape RP+230GP

Dream, design, deliver with our 3M[™] VHB[™] Tape RP+230GP. It is a grey, 2.3 mm (90 mil), multi-purpose acrylic adhesive with a conformable foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides good strength and durability. It offers design flexibility with its visco-elasticity and can bond to a variety of surfaces.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Grey, 2.3 mm (90 mil), multi-purpose adhesive and conformable acrylic foam core for good performance in a variety of applications
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100309726 | RP+230GP19SAM | 3M [™] VHB [™] Tape RP+230GP, 19 mm x 3 m | 58 | Roll |
| 7100307061 | RP+230GP1120 | 3M [™] VHB [™] Tape RP+230GP, 1120 mm x 33 m | 1 | Roll |





3M[™] VHB[™] Tape 4646

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4646. It is a dark grey, 0.6 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072202 | 464612 | 3M [™] VHB [™] Tape 4646F, Grey, 12 mm x 33 m, 0.6 mm | 6 | Roll |
| 7000072204 | 464619 | 3M [™] VHB [™] Tape 4646F, Grey, 19 mm x 33 m, 0.6 mm | 4 | Roll |
| 7000072205 | 464625 | 3M [™] VHB [™] Tape 4646F, Grey, 25 mm x 33 m, 0.6 mm | 3 | Roll |
| 7000072206 | 464650 | 3M [™] VHB [™] Tape 4646F, Grey, 50 mm x 33 m, 0.6 mm | 24 | Roll |
| 7000072197 | 4646295 | 3M [™] VHB [™] Tape 4646F, Grey, 295 mm x 33 m, 0.6 mm | 1 | Roll |
| 7000072198 | 4646590 | 3M [™] VHB [™] Tape 4646F, Grey, 590 mm x 33 m, 0.6 mm | 2 | Roll |

3M[™] VHB[™] Tape 4611F

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4611F. It is a dark grey, 1.1 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.

- C_
- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000033105 | 658292 | 3M [™] VHB [™] Tape 4611F, Dark Grey, 6 mm x 33 m, 1.1 mm | 12 | Roll |
| 7000072169 | 461112 | 3M [™] VHB [™] Tape 4611F, Dark Grey, 12 mm x 33 m, 1.1 mm | 6 | Roll |
| 7000072168 | 4611SAM | 3M [™] VHB [™] Tape 4611F, Dark Grey, 19 mm x 3 m, 1.1 mm, Short roll | 48 | Roll |
| 7000072164 | 461119 | 3M [™] VHB [™] Tape 4611F, Dark Grey, 19 mm x 33 m, 1.1 mm | 4 | Roll |
| 7000072171 | 461125 | 3M [™] VHB [™] Tape 4611F, Dark Grey, 25 mm x 33 m, 1.1 mm | 3 | Roll |
| 7000072160 | 4611295 | 3M [™] VHB [™] Tape 4611F, Dark Grey, 295 mm x 33 m, 1.1 mm | 1 | Roll |
| 7100003021 | 46111180 | 3M™ VHB™ Tape 4611F, Dark Grey, 1180 mm x 33 m, 1.1 mm | 1 | Roll |



3M[™] VHB[™] Tape 4655F

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4655F. It is a dark grey, 1.6 mm thick, general purpose adhesive with firm foam that has the added feature of high temperature resistance. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072217 | 465519 | 3M [™] VHB [™] Tape 4655F, Grey, 19 mm x 33 m, 1.6 mm | 4 | Roll |
| 7000072218 | 465525 | 3M [™] VHB [™] Tape 4655F, Grey, 25 mm x 33 m, 1.6 mm | 3 | Roll |
| 7000072212 | 4655F295 | 3M [™] VHB [™] Tape 4655F, Grey, 295 mm x 33 m, 1.6 mm | 1 | Roll |

3M[™] VHB[™] Tape 4930P

3M[™] VHB[™] Tape 4930 replaces screws, rivets and studs to permanently adhere one substrate to another while spreading the stress load across the entire length of the joint. 3M[™] VHB[™] tape has general purpose adhesive on both sides of firm type foam. It is white, 0.6 mm thick and bonds to many high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100262616 | 493012 | 3M [™] VHB [™] Tape 4930P, White, 12 mm x 33 m, 0.6 mm | 6 | Roll |
| 7100262614 | 493019 | 3M [™] VHB [™] Tape 4930P, White, 19 mm x 33 m, 0.6 mm | 4 | Roll |
| 7100262590 | 4930P50 | 3M [™] VHB [™] Tape 4930P, White, 50 mm x 33 m, 0.6 mm | 1 | Roll |
| 7100262619 | 4930P1190 | 3M™ VHB™ Tape 4930P, White, 1190 mm x 33 m, 0.6 mm | 1 | Roll |



3M[™] VHB[™] Tape 4950

3M[™] VHB[™] Tape 4950 replaces screws, rivets and studs to permanently adhere one substrate to another while spreading the stress load across the entire length of the joint. 3M[™] VHB[™] tape has general purpose adhesive on both sides of firm type foam. It is white, 1.1 mm thick and bonds to many high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100262606 | 4950F19 | 3M [™] VHB [™] Tape 4950F, White, 19 mm x 33 m, 1.1 mm | 4 | Roll |
| 7100262608 | 4950F25 | 3M [™] VHB [™] Tape 4950F, White, 25 mm x 33 m, 1.1 mm | 3 | Roll |
| 7100262508 | 4950P12 | $3M^{ \!$ | 6 | Roll |
| 7100262507 | 495019 | 3M [™] VHB [™] Tape 4950P, White, 19 mm x 33 m, 1.1 mm | 4 | Roll |
| 7100262602 | 495025 | $3M^{ m \tiny M}$ VHB [™] Tape 4950P, White, 25 mm x 33 m, 1.1 mm | 3 | Roll |
| 7100262858 | 4950P295 | 3M [™] VHB [™] Tape 4950P, White, 295 mm x 33 m, 1.1 mm | 1 | Roll |
| 7100262607 | 49501180 | $3M^{\scriptscriptstyle \rm M}$ VHB $^{\scriptscriptstyle \rm M}$ Tape 4950P, White, 1180 mm x 33 m, 1.1 mm | 1 | Roll |

3M[™] VHB[™] Tape 4912F

3M™ VHB™ Tape 4912F is a firm, white, 2 mm thick, double-sided, pressure-sensitive, closed-cell acrylic foam tape that bonds high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072300 | 4912F12 | 3M™ VHB™ Tape 4912F, White, 12.0 mm x 16.5 m, 2.0 mm | 6 | Roll |
| 7000072302 | 4912F19 | 3M [™] VHB [™] Tape 4912F, White, 19 mm x 16.5 m, 2.0 mm | 4 | Roll |
| 7000072303 | 4912F25 | 3M [™] VHB [™] Tape 4912F, White, 25 mm x 16.5 m, 2.0 mm | 3 | Roll |
| 7000072296 | 4912F285 | 3M [™] VHB [™] Tape 4912F, White, 285 mm x 16.5 m, 2.0 mm | 1 | Roll |
| 7000033119 | 49121180 | 3M [™] VHB [™] Tape 4912F, White, 1180 mm x 16.5 m, 2.0 mm | 1 | Roll |





3M[™] VHB[™] Tape 4919F

Dream, Design, Deliver with our 3M[™] VHB[™] Tape 4919F. It is a black, 0.6 mm thick, multi-purpose acrylic adhesive with a conformable, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a board variety of high and medium surface energy substrates and offers a good plastiziser resistance.



- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072325 | 723991 | 3M [™] VHB [™] Tape 4919F, Black, 6 mm x 33 m, 0.6 mm | 12 | Roll |
| 7000072327 | 4919F12 | 3M [™] VHB [™] Tape 4919F, Black, 12 mm x 33 m, 0.6 mm | 6 | Roll |
| 7000072324 | 4919FLOG | 3M [™] VHB [™] Tape 4919F, Black, 295 mm x 33 m, 0.6 mm | 1 | Roll |
| 7000072329 | 665687 | 3M [™] VHB [™] Tape 4919F, Black, 1180 mm x 33 m, 0.6 mm | 1 | Roll |

3M[™] VHB[™] Tape 4959F

3M™ VHB™ Tape 4959F is a firm, white, 3.0mm thick, double-sided, pressure-sensitive, closed-cell acrylic foam tape that bonds high surface energy substrates.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072522 | 4959F12 | 3M™ VHB™ Tape 4959F, White, 12 mm x 16.5 m, 3.0 mm | 6 | Roll |
| 7000072524 | 4959F19 | 3M™ VHB™ Tape 4959F, White, 19 mm x 16.5 m, 3.0 mm | 4 | Roll |
| 7000072525 | 4959F25 | 3M [™] VHB [™] Tape 4959F, White, 25 mm x 33 m, 3.0 mm | 3 | Roll |
| 7000033140 | 4959FLOG | 3M™ VHB™ Tape 4959F, White, 295 mm x 16.5 m, 3.0 mm | 1 | Roll |



General Purpose Foam Tapes

3M[™] Double Coated Urethane Foam Tape 4008

3M™ Double Coated Urethane Foam Tape 4008 is a white, 3.2 mm thick, double-coated, open-cell urethane foam tape with a paper liner that offers a high shear strength when used for interior mounting tasks.

- High shear strength on metal and high surface energy plastics
- Durable foam is ideal for interior mounting applications
- Off-white colour provides a clean appearance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048482 | 400819 | $3 M^{\scriptscriptstyle \rm M}$ Double Coated Urethane Foam Tape 4008, White, 19 mm x 33 m, 3.1 mm | 12 | Roll |
| 7000048483 | 4008253X | 3M [™] Double Coated Urethane Foam Tape 4008, White, 25 mm x 33 m, 3.1 mm | 9 | Roll |

3M[™] Double Coated Urethane Foam Tape 4016

3M[™] Double Coated Urethane Foam Tape 4016 is a white, 1.6 mm thick, double-coated, open-cell urethane foam tape with a paper liner that offers a high shear strength when used for interior mounting tasks.

- High shear strength on metal and high surface energy plastics
- Durable foam is ideal for interior mounting applications
- Off-white colour provides a clean appearance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000049238 | 401619 | 3M [™] Double Coated Urethane Foam Tape 4016, Creme, 19 mm x 13.7 m, 1.6 mm | 12 | Roll |

3M[™] Double Coated Urethane Foam Tape 4026

3M[™] 4026 Double Coated Urethane Foam Tape is a double sided, urethane foam tape that provides a strong and reliable bond on a variety of surfaces with a high shear strength. Perfect for interior mounting, bonding and attaching applications. It's designed to fill gaps and distribute stress uniformly over the bonded area.

- Durable foam is ideal for interior mounting, bonding and attaching applications
- The open-cell, flexible urethane foam carrier dampens and prevents vibration
- Provides good insulating qualities

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116029 | 402612 | 3M™ Double Coated Urethane Foam Tape 4026, White, 12 mm x 33 m, 1.6 mm | 18 | Roll |
| 7000042390 | 40261933 | 3M™ Double Coated Urethane Foam Tape 4026, White, 19 mm x 33 m, 1.6 mm | 12 | Roll |
| 7000116031 | 402625 | $3 M^{\scriptscriptstyle \rm M}$ Double Coated Urethane Foam Tape 4026, White, 25 mm x 33 m, 1.6 mm | 9 | Roll |
| 7000116033 | 402650X33 | 3M™ Double Coated Urethane Foam Tape 4026, White, 50 mm x 33 m, 1.6 mm | 5 | Roll |







3M[™] Double Coated Urethane Foam Tape 4032

3M[™] 4032 Double Coated Urethane Foam Tape is a double sided, urethane foam tape that provides a strong and reliable bond on a variety of surfaces with a high shear strength. Perfect for interior mounting, bonding and attaching applications. It's designed to fill gaps and distribute stress uniformly over the bonded area.



- Durable foam is ideal for interior mounting, bonding and attaching applications
- The open-cell, flexible urethane foam carrier dampens and prevents vibration
- Provides good insulating qualities

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116019 | 403212 | $3 M^{\scriptscriptstyle \rm M}$ Double Coated Urethane Foam Tape 4032, White, 12 mm x 66 m, 0.8 mm | 18 | Roll |
| 7000042389 | 403219 | 3M [™] Double Coated Urethane Foam Tape 4032, White, 19 mm x 66 m, 0.8 mm | 12 | Roll |
| 7000116021 | 403225 | 3M [™] Double Coated Urethane Foam Tape 4032, White, 25 mm x 66 m, 0.8 mm | 9 | Roll |

3M[™] Double Coated Foam Tape 9508B

3M™ Double Coated Foam Tape 9508B is a black, 0.8mm thick, double coated closed-cell polyethylene foam tape with an acrylic adhesive.

- Black, 0.8 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000096245 | 704150 | 3M [™] Double Coated Foam Tape 9508B, Black, 19 mm x 66 m, 0.8 mm | 16 | Roll |

3M[™] Double Coated Foam Tape 9508W

3M™ Double Coated Foam Tape 9508W is a white, 0.8mm thick, double coated closed-cell polyethylene foam tape with acrylic adhesive.

- White, 0.8 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000096248 | 9508W19 | $3 M^{\scriptscriptstyle \rm M}$ Double Coated Foam Tape 9508W, White, 19 mm x 66 m, 0.8 mm | 16 | Roll |

3M[™] Double Coated Foam Tape 9515B

3M[™] Double Coated Foam Tape 9515B for permanently attaching or mounting components indoors and outdoors such as e.g. Holders, hooks, signs, mirrors, frames, moldings etc.

- Ideal for assembling low cost materials
- For bonding glass and transparent plastics
- Can be used with polycarbonate, acrylic, PVC

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000096250 | 9515B1500 | 3M [™] Double Coated Foam Tape 9515BF, Black, 1500 mm x 33 m, 1.5 mm | 1 | Roll |

3M[™] Double Coated Foam Tape 9515W

3M™ Double Coated Foam Tape 9515W is a white, 1.5 mm thick, double coated polyethylene foam tape with acrylic adhesive.

- White, 1.5 mm thick, closed-cell double coated polyethylene foam with acrylic adhesive
- Mount and join a wide range of materials
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000096247 | 9515W | 3M [™] Double Coated Foam Tape 9515W, White, 19 mm x 33 m, 1.5 mm | 16 | Roll |

3M[™] Double Coated Foam Tape 9528

3M™ Double Coated Foam Tape 9528 is a 0.8 mm thick, closed-cell double coated polyethylene foam with a rubber adhesive. It is a high grab adhesive suitable for lower performance applications.

- 0.8 mm thick, closed-cell double coated polyethylene foam with rubber based adhesive
- Apply for lower performance applications
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000041758 | 95281266 | 3M [™] Double Coated Foam Tape 9528, White 12 mm x 66 m, 0.8 mm | 18 | Roll |

3M[™] Double Coated Foam Tape 9536

3M™ Double Coated Foam Tape 9536 is white, 1.0 mm thick, coated on both sides with a rubber based adhesive

- White, 1mm thick, double coated polyethylene foam with rubber based adhesive
- Mount and join a wide range of materials
- It adheres well among other things on apolar substrates.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000111566 | 953619 | $3 M^{ \ensuremath{\mathbb{N}}}$ Double Coated Foam Tape 9536, White 19 mm x 66 m | 12 | Roll |

3M[™] Double Coated Polyethylene Foam Tape 9546

3M™ 9546 Double Coated Polyethylene Foam Tape is a double sided, general purpose polyethylene foam tape, formulated to bond many medium-high surface energy plastics

- Durable foam is ideal for interior mounting, bonding and attaching applications
- The foam dampens and prevents vibration
- Provides good insulating gualities

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000111563 | 954612 | 3M [™] Double Coated Polyethylene Foam Tape 9546, White 12 mm x 66 m, 1.1 mm | 18 | Roll |
| 7000041773 | 954619 | 3M [™] Double Coated Polyethylene Foam Tape 9546, White 19 mm x 66 m, 1.1 mm | 12 | Roll |
| 7000111564 | 954625 | 3M™ Double Coated Polyethylene Foam Tape 9546, White, 25 mm x 66 m, 1.1 mm | 9 | Roll |





3M[™] Double Coated Foam Tape 8610W

3M[™] Double Coated Foam Tape 8610W is a white double coated closed-cell polyethylene foam tape with acrylic adhesive.

- This product is designed for general purpose mounting and joining.
- Intended applications are e.g. assembly of displays (POS), light weight emblems, name plates, etc..
- Surfaces and conditions for removal should be tested by the user to determine fitness for the users' particular purpose

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000035444 | 86101500 | $3M^{\scriptscriptstyle \rm M}$ Double Coated Foam Tape 8610W, White, 1500 mm x 66 m, 1.0 mm | 1 | Roll |

3M[™] High Grade Double Coated Foam Tape 4614F

Dream, Design, Deliver with 3M[™] High Grade Double Coated Foam Tape 4614F. It is a clear, 0.8 mm thick, general purpose acrylic adhesive on both sides of a firm, foam core. It can replace rivets, welds and screws. The fast and easy to use permanent bonding method provides high strength and long-term durability. It offers design flexibility with its viscoelasticity and powerful ability to bond to a variety of surfaces. It is colourless making it ideal for bonding transparent materials or for applications where a coloured bond line is unacceptable.

- Fast and easy-to-use permanent bonding method provides high strength and long-term durability
- Pressure sensitive adhesive bonds on contact to provide immediate handling strength
- Virtually invisible fastening keeps surfaces smooth, even edges are invisible due to it's transparency

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072183 | 4614F12 | 3M [™] High Grade Double Coated Foam Tape 4614F, Transparent, 12 mm x 33 m, 0.8 mm | 6 | Roll |
| 7000072184 | 4614F19 | $3 \ensuremath{M}\xspace^{\times}$ High Grade Double Coated Foam Tape 4614F, Transparent, 19 mm x 33 m, 0.8 mm | 16 | Roll |
| 7000033109 | 4614F600 | 3M [™] High Grade Double Coated Foam Tape 4614F, Transparent, 600 mm x 33 m, 0.8 mm | 1 | Roll |

3M[™] Double Coated Removable Foam Tape 4658

3M[™] Double Coated Removable Foam Tape 4658 is a clear, closed-cell, acrylic foam carrier. It is formulated for indoor and outdoor mounting and bonding applications where clean removability is needed. It offers good temperature resistance and long term durability.



- Bonds stainless trim to metal frames
- Clear
- Clean removal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000072226 | 4658F600 | 3M [™] Double Coated Removable Foam Tape 4658, Transparent, 600 mm x 25 m, 0.8 mm | 2 | Roll |
| 7000072230 | 46581925 | $3 \ensuremath{M}^{\ensuremath{w}}$ Double Coated Removable Foam Tape 4658F, Transparent 19 mm x 25 m, 0.8 mm | 4 | Roll |
| 7000072229 | 46581225 | $3 \ensuremath{M}^{\ensuremath{w}}$ Double Coated Removable Foam Tape 4658F, Transparent, 12 mm x 25 m, 0.8 mm | 6 | Roll |
| 7000073335 | PWTAPE19 | 3M [™] Double Coated Removable Foam Tape 4658F, Transparent, 19 mm x 5 m, 0.8 mm, Blister | 10 | Roll |
| 7000072231 | 46582525 | 3M [™] Double Coated Removable Foam Tape 4658F, Transparent, 25 mm x 25 m, 0.787 mm | 3 | Roll |
| 7000033110 | 164194 | 3M™ Double Coated Removable Foam Tape 4658F, Transparent, 295 mm x 25 m, 0.8 mm | 1 | Roll |



Adhesive Transfer Tapes

3M[™] VHB[™] Adhesive Transfer Tape F9460PC

3M™ VHB™ Adhesive Transfer Tape F9460PC is a 50µm 100MP acrylic adhesive with 105µm #58 polycoated kraft paper liner - printed 3M

- 50µm transparant VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and

| | metal fabrication • Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C | | | | | |
|------------|---|---|-----|------|--|--|
| Product ID | Part Number | Product Name | MOQ | OU | | |
| 7100031051 | 675130 | 3M [™] VHB [™] Adhesive Transfer Tape F9460PC, Transparent, 305 mm x 55 m, 0.05 mm | 4 | Roll | | |
| 7100031031 | 675125 | 3M [™] VHB [™] Adhesive Transfer Tape F9460PC, Transparent, 610 mm x 55 m, 0.05 mm | 1 | Roll | | |
| 7100030363 | 675139 | 3M [™] VHB [™] Adhesive Transfer Tape F9460PC, Transparent, 1220 mm x 55 m, 0.05 mm | 1 | Roll | | |
| 7100104780 | F9460PCCONFIG | 3M [™] VHB [™] Adhesive Transfer Tape F9460PC, Transparent, Jumbo 1220 mm width, | 1 | Roll | | |

3M[™] VHB[™] Adhesive Transfer Tape F9469PC

3M™ VHB™ Adhesive Transfer Tape F9469PC 130µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - printed 3M

Configurable rolls

- 130µm transparant VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100031061 | 675146 | 3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 305 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100029174 | 675114 | 3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 610 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100029188 | 675119 | 3M™ VHB™ Adhesive Transfer Tape F9469PC, Transparent, 610 mm x 329 m, 0.13 mm | 1 | Roll |
| 7100029175 | 675117 | 3M [™] VHB [™] Adhesive Transfer Tape F9469PC, Transparent, 1220 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100104783 | F9469PCCONFIG | 3M [™] VHB [™] Adhesive Transfer Tape F9469PC, Transparent, Jumbo 1.54 m width, Configurable rolls | 1 | Roll |





3M[™] VHB[™] Adhesive Transfer Tape 9469PC

3M™ Adhesive Transfer Tape 9469, 130µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - unprinted.

- 130µm transparant adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100104784 | 9469PCCONFIG | 3M™ VHB™ Adhesive Transfer Tape 9469PC, Transparent, Jumbo 1540 mm width, Configurable rolls | 1 | Roll |

3M[™] VHB[™] Adhesive Transfer Tape F9473PC

3M™ VHB™ Adhesive Transfer Tape F9473PC 260µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - printed 3M

- 260µm transparant VHB™ transfer tape offers a thin profile combined with our high strength acrylic adhesive for a long-lasting bond
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100104792 | F9473PCCONFIG | 3M™ VHB™ Adhesive Transfer Tape F9473PC, Jumbo 1540 mm width, Configurable rolls | 1 | Roll |
| 7100030935 | 675135 | 3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 12 mm x 55 m, 0.26 mm | 18 | Roll |
| 7100031064 | 676111 | 3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 19 mm x 55 m, 0.26 mm | 12 | Roll |
| 7100029176 | 675115 | 3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 25 mm x 55 m, 0.26 mm | 9 | Roll |
| 7100031009 | 675118 | 3M™ VHB™ Adhesive Transfer Tape F9473PC, Transparent, 1220 mm x 55 m, 0.26 mm | 1 | Roll |

3M[™] VHB[™] Adhesive Transfer Tape 9473PC

3M™ Adhesive Transfer Tape 9473PC 260µm 100MP high performance acrylic with 105µm #58 polycoated kraft paper liner - unprinted.


- 260µm transparant adhesive transfer tape with acrylic adhesive on a polycoated kraft paper liner. High performance industrial joining and metal fabrication
- Excellent long-term holding power with higher adhesion strength than typical PSAs. Replace rivets, spot welds, liquid adhesives and other permanent fasteners used for high performance industrial joining and metal fabrication
- Short term temperature tolerance of up to 260 °C, Operating temperature tolerance of up to 149°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100038427 | 679404 | 3M [™] VHB [™] Adhesive Transfer Tape 9473PC, Transparent, 1220 mm x 165 m, 0.25 mm | 1 | Roll |
| 7100104791 | 9473PCCONFIG | 3M [™] VHB [™] Adhesive Transfer Tape 9473PC, Transparent, Jumbo 1540 mm width, Configurable rolls | 1 | Roll |



3M[™] Adhesive Transfer Tape 467MP

3M[™] Adhesive Transfer Tape 467MP provides outstanding adhesion to metal and high surface energy plastics. 200MP adhesive delivers excellent shear strength to resist slippage and edge lifting. The tape is temporarily repositionable for placement accuracy. It also performs well after exposure to humidity and hot/cold temperatures. A PCK layflat liner helps prevent curling and buckling in the liner.



- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Get outstanding adhesion to metal and high surface energy plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100021268 | 668097 | 3M [™] Adhesive Transfer Tape 467MP, Transparent, 305 mm x 55 m, 0.05 mm | 4 | Roll |
| 7100021933 | 467305 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 305 mm x 110 m, 0.05 mm | 1 | Roll |
| 7100021266 | 696336 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 305 mm x 165 m | 5 | Roll |
| 7100021283 | 46761055 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 55 m, 0.05 mm | 1 | Roll |
| 7100022040 | 467610 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 110 m, 0.05 mm | 1 | Roll |
| 7100023282 | 663878 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 610 mm x 165 m, 0.05 mm | 1 | Roll |
| 7100024647 | 663777 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 55 m x 0.05 mm | 1 | Roll |
| 7100021286 | 467MP110 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 110 m x 0.05 mm | 1 | Roll |
| 7100023283 | 663778 | 3M™ Adhesive Transfer Tape 467MP, Transparent, 1220 mm x 165 m x 0.05 mm | 1 | Roll |
| 7100104803 | 467MPCONFIG | 3M [™] Adhesive Transfer Tape 467MP, Transparent, Jumbo 1540 mm width, 0.05 mm, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 467MPF


3M[™] Adhesive Transfer Tape 467MPF provides outstanding adhesion to metal and high surface energy plastics. Our 200MP adhesive delivers excellent shear strength to resist slippage and edge lifting. The tape is temporarily repositionable for placement accuracy. It also performs well after exposure to humidity and hot/ cold temperatures. The clear polyester liner allows for easy inspection of parts

- 50µm adhesive transfer tape with acrylic adhesive on a Clear Polyester Film (PET) liner. Excellent shear strength, temperature resistance and chemical resistance.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Outstanding adhesion to metal and high surface energy plastics with excellent shear strength to resist slippage and edge lifting, provides short term repositionability for placement accuracy

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100104794 | 467MPFCONFIG | 3M [™] Adhesive Transfer Tape 467MPF, Transparent, Jumbo 1372 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 468MP

3M[™] Adhesive Transfer Tape 468MP get excellent shear strength, temperature and chemical resistance with our easy to apply 3M[™] Adhesive Transfer Tape 468MP. It's an acrylic adhesive on a polycoated kraft paper liner and is ideal for die-cutting.



- strength, temperature resistance and chemical resistance.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process.
- Outstanding adhesion to metal and high surface energy plastics with excellent shear strength to resist slippage and edge lifting, provides short term repositionability for placement accuracy


| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100020587 | 664159 | 3M [™] Adhesive Transfer Tape 468MP, Transparent, 305 mm x 55 m, 0.13 mm | 4 | Roll |
| 7100024646 | 468305 | 3M™ Adhesive Transfer Tape 468MP, Transparent, 305 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100026753 | 669411 | 3M™ Adhesive Transfer Tape 468MP, Transparent, 330 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100021280 | 663882 | 3M™ Adhesive Transfer Tape 468MP, Transparent, 610 mm x 55 m x 0.13 mm | 1 | Roll |
| 7100021269 | 663790 | 3M™ Adhesive Transfer Tape 468MP, Transparent, 610 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100021285 | 4684855 | 3M™ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100021282 | 4681220 | $3 \ensuremath{M^{\mbox{\tiny M}}}$ Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 110 m x 0.13 mm | 1 | Roll |
| 7100021281 | 671790 | 3M [™] Adhesive Transfer Tape 468MP, Transparent, 1220 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100104804 | 468MPCONFIG | 3M™ Adhesive Transfer Tape 468MP, Transparent, 1540 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9773WL+

3M[™] Adhesive Transfer Tape 9773WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M[™] Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 – 72 hours.

- $\bullet\,75\mu m$ thick adhesive on 180 μm #96 white polycoated kraft liner
- Good humidity, solvent, chemical and UV resistance
- Performs at temperatures up to 121°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100312120 | ххх | 3M [™] Adhesive Transfer Tape 9773WL+, Config Roll | 1 | Roll |
| 7100321905 | ххх | 3M™ Adhesive Transfer Tape 9773WL+, Transparent, 80 mm x 220 m | 3 | Roll |
| 7100321954 | ххх | 3M [™] Adhesive Transfer Tape 9773WL+, Transparent, 1020 mm x 55 m | 1 | Roll |







3M[™] Adhesive Transfer Tape 9774WL+

3M[™] Adhesive Transfer Tape 9774WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M[™] Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 – 72 hours.

- 100µm thick adhesive on a 180µm #96 white polycoated kraft liner
- Exceptional humidity, solvent, chemical and UV resistance helps bond durability
- Performs at temperatures up to 121°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100312119 | ххх | 3M [™] Adhesive Transfer Tape 9774WL+, Config Roll | 1 | Roll |
| 7100321906 | xxx | 3M™ Adhesive Transfer Tape 9774WL+, Transparent, 1524 mm x 55 m | 1 | Roll |

3M[™] Adhesive Transfer Tape 9775WL+

3M[™] Adhesive Transfer Tape 9775WL+ is designed for permanently bonding plastics, foams, wood and textiles. The adhesive easily flows into crevices and voids without the addition of heat. Minimal pressure is required. This transfer tape features 3M[™] Adhesive 300MP+, a high tack acrylic that delivers good initial bond and full adhesion within 48 - 72 hours.

- $\bullet\,127\mu m$ thick adhesive on a 180 μm #96 white polycoated kraft liner
- Exceptional humidity, solvent, chemical and UV resistance helps bond durability
- Performs at temperatures up to 121°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100321907 | ххх | 3M [™] Adhesive Transfer Tape 9775WL+, Transparent, 1020 mm x 55 m | 1 | Roll |
| 7100312118 | 9775WLCONFIG | 3M™ Adhesive Transfer Tape 9775WL+, Transparent, 1540 mm, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 6035PC

3M[™] Adhesive Transfer Tape 6035PC is a 127µm 300mp acrylic adhesive with a 107µm #58 polycoated kraft paper liner.

- Low fogging, double sided, acrylic adhesive tested to SAE J1756 specifications
- Provides excellent bond to a wide variety of surfaces
- Good shear and peel values to many substrates including plastics, wood, foam, fabric and metal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------------|---|-----|------|
| 7100032985 | 6035PC 60 INX180YD | 3M [™] Adhesive Transfer Tape 6035PC, Transparent, 1524 mm x 165 m | 1 | Roll |

3M[™] Adhesive Transfer Tape 9471LE

3M™ Adhesive Transfer Tape 9471LE is a 50µm 300LSE high strength acrylic adhesive on a 107µm #58 polycoated craft paper liner

- 50µm 300LSE Adhesive Transfer Tape.Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to and lightly oiled metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------------|--|-----|------|
| 7100089546 | 715312 | 3M [™] Adhesive Transfer Tape 9471LE, Transparent, 305 mm x 165 m, 0.05 mm | 1 | Roll |
| 7100089547 | 9471LE 686MM X 55M | 3M [™] Adhesive Transfer Tape 9471LE, Transparent, 686 mm x 55 m, 0.05 mm | 2 | Roll |
| 7100089545 | 9471LE686 | 3M [™] Adhesive Transfer Tape 9471LE, Transparent, 686 mm x 165 m, 0.05 mm | 1 | Roll |
| 7100104795 | 9471LECONFIG | 3M [™] Adhesive Transfer Tape 9471LE, Transparent, Jumbo 1372 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9472LE

3M™ Adhesive Transfer Tape 9472LE is a 130µm 300LSE high strength acrylic adhesive on a 107µm #58 polycoated craft paper liner

- 127µm 300LSE Adhesive Transfet Tape. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to and lightly oiled metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100089553 | 9472LE51 | 3M [™] Adhesive Transfer Tape 9472LE, Transparent, 500 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100089551 | 715447 | 3M™ Adhesive Transfer Tape 9472LE, Transparent, 685 mm x 165 m, 0.13 mm | 1 | Roll |
| 7100089548 | 715443 | 3M [™] Adhesive Transfer Tape 9472LE, Transparent, 686 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100089550 | 9472LE15 | 3M [™] Adhesive Transfer Tape 9472LE, Transparent, 1220 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100104796 | 9472LECONFIG | 3M [™] Adhesive Transfer Tape 9472LE, Transparent, Jumbo 1372 width, 0.13 mm, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9471FL

3M[™] Adhesive Transfer Tape 9471FL O is a versatile, market proven, 50µm transfer tape on a release liner. Featuring 3M[™] 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000073424 | 9471FL13 | 3M™ Adhesive Transfer Tape 9471FL, Transparent, 1372 mm x 55 m, 0.05 mm | 1 | Roll |





3M[™] Adhesive Transfer Tape 9671LE

3M[™] Adhesive Transfer Tape 9671LE O is a versatile, market proven,50µm transfer tape on a printed release paper liner. Featuring 3M[™] 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100104774 | 9671LECONFIG | 3M [™] Adhesive Transfer Tape 9671LE, Transparent, Jumbo 1372 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9672LE

3M[™] Adhesive Transfer Tape 9672LE is a versatile, market proven, 127µm transfer tape on a printed release paper liner. Featuring 3M[™] Adhesive Transfer Tape 9672LE 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100153134 | 9672LE1372 | 3M [™] Adhesive Transfer Tape 9672LE, Transparent, 1372 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100104775 | 9672LECONFIG | 3M™ Adhesive Transfer Tape 9672LE, Transparent, Jumbo 1372 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9453LE

3M[™] Adhesive Transfer Tape 9453LE is a versatile, market proven, 3.5 mil (0.9 mm) transfer tape on a printed release paper liner. Featuring 3M[™] 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates
- Adhesive provides excellent holding power and anti-lifting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100104797 | 9453LECONFIG | 3M™ Adhesive Transfer Tape 9453LE, Transparent, 0.09 mm, Configurable rolls | 1 | Roll |





3M[™] Double Coated Tape 9495LE

3M™ Double Coated Tape 9495LE provides high bond strength to most surfaces, including many low surface energy plastics such as polypropylene and powder coated paints. The acrylic adhesive also provides excellent adhesion to surfaces contaminated lightly with oil typically used with machine parts.

- Adds dimensional stability to foams and other substrates and also makes it easier to handle the tape during slitting and die-cutting
- 3M[™] Double Coated Tape 9495LE features a dual liner for ease in selective die cutting
- The bond strength of 3M[™] Laminating Adhesive 300LSE increases as a function of time and temperature, and has very high initial adhesion

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|---|-----|------|
| 7000048873 | 9495LE 27X180YD | 3M™ Double Coated Tape 9495LE, Transparent, 686 mm x 165 m, 0.17 mm | 1 | Roll |

3M[™] Double Coated Tape 93010LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M™ Double Coated Tape 93010LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.

- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100090427 | 930101372 | 3M [™] Double Coated Tape 93010LE, Transparent, 1372 mm x 55 m, 0.15 mm | 1 | Roll |
| 7100104769 | 93010LECONFIG | 3M [™] Double Coated Tape 93010LE, Transparent, Thickness 0.15 mm, Configurable rolls | 1 | Roll |


3M[™] Double Coated Tape 93015LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M™ Double Coated Tape 93015LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.

- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100089499 | 930151372 | 3M™ Double Coated Tape 93015LE, Transparent, 1372 mm x 55 m, 0.15 mm | 1 | Roll |
| 7100104770 | 93015LECONFIG | 3M [™] Double Coated Tape 93015LE, Transparent, Thickness 0.15 mm, Configurable rolls | 1 | Roll |





3M[™] Double Coated Tape 93020LE

Comprised of a polyester film backing with a layer of adhesive on each side, 3M[™] Double Coated Tape 93020LE is a market proven, double coated transfer tape with good anti-lifting properties. This tape bonds well to similar and dissimilar materials including, metals, most plastics, glass, papers and painted surfaces.

- Polyester film carrier provides dimensional stability to foams and other substrates to make tape easier to handle during slitting and die-cutting
- Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- High adhesion to metals and high surface energy materials, making it suitable for bonding dissimilar substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100089541 | 930201372 | 3M [™] Double Coated Tape 93020LE, Transparent, 1372 mm x 55 m, 0.2 mm | 1 | Roll |
| 7100104771 | 93020LECONFIG | 3M [™] Double Coated Tape 93020LE, Transparent, Configurable | 1 | Roll |

Focus

3M[™] Double Coated Tape GPT-020

Designed for Versatility: 3M[™] Double coated tape GPT-020P is a transparent, 200 micron thick, modified solventless acrylic adhesive with a white printed PCK paper liner. 3M GPT-020P combines a high level of peel and shear performance enabling high adhesion to a wide variety of substrates both to high and some low surafce energy substrates.

- Providing versatility with purpose with the capability to bond to a wide variety of substrates from high to low surface.
- High initial tack and humidity resistance
- High level of peel and shear performance.


| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------------|---|-----|------|
| 7100269835 | GPT-020_9X50 | 3M™ Double Coated Tape GPT-020, Transparent, 9 mm x 50 m, 0.2 mm | 27 | Roll |
| 7100269834 | GPT-020_12X50 | 3M™ Double Coated Tape GPT-020, Transparent, 12 mm x 50 m, 0.2 mm | 20 | Roll |
| 7100269550 | GPT-020_15X50 | 3M™ Double Coated Tape GPT-020, Transparent, 15 mm x 50 m, 0.2 mm | 16 | Roll |
| 7100269702 | GPT-020_19X50 | 3M™ Double Coated Tape GPT-020, Transparent, 19 mm x 50 m, 0.2 mm | 16 | Roll |
| 7100276858 | GPT020PBLI19 | 3M [™] Double Coated Tape GPT-020, Transparent, 19 mm x 50 m, 0.2 mm | 4 | Roll |
| 7100269552 | GPT-020_25X50 | 3M™ Double Coated Tape GPT-020, Transparent, 25 mm x 50 m, 0.2 mm | 10 | Roll |
| 7100269704 | GPT-020_38X50 | 3M [™] Double Coated Tape GPT-020, Transparent, 38 mm x 50 m, 0.2 mm | 10 | Roll |
| 7100269705 | GPT-020F 50MMX50M | 3M™ Double Coated Tape GPT-020, Transparent, 50 mm x 50 m, 0.2 mm | 6 | Roll |
| 7100269603 | GPT-020_1000X50 | 3M [™] Double Coated Tape GPT-020, Transparent, 1000 mm x 50 m, 0.2 mm | 1 | Roll |
| 7100269604 | GPT-020_1540X50 | 3M™ Double Coated Tape GPT-020, Transparent, 1540 mm x 50 m, 0.2 mm | 1 | Roll |
| 7100269551 | GPT-020_1540X500 | 3M [™] Double Coated Tape GPT-020, Transparent, 1540 mm x 500 m, 0.2 mm | 1 | Roll |
| 7100264010 | GPT-020_CONFIG | 3M [™] Double Coated Tape GPT-020, Transparent, 1540 mm, 0.2 mm Configurable rolls | 1 | Roll |





3M[™] Double Coated Tape GPT-020F

Designed for Versatility: 3M[™] Double coated tape GPT-020F is a transparent, 200 micron thick, modified solventless acrylic adhesive with a white printed PP filmic liner. 3M GPT-020F combines a high level of peel and shear performance enabling high adhesion to a wide variety of substrates both to high and some low surafce energy substrates.



- High initial tack and humidity resistance
- Easy handling and converting due to filmic liner delivery

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------------|---|-----|------|
| 7100243948 | GPT02065000 | 3M [™] Double Coated Tape GPT-020F, Transparent, 6 mm x 5000 m, 0.2 mm | 32 | Roll |
| 7100243949 | GPT02093850 | 3M [™] Double Coated Tape GPT-020F, Transparent, 9 mm x 3850 m, 0.2 mm | 1 | Roll |
| 7100226020 | GPT-020F 12MMX50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 12 mm x 50 m, 0.2 mm | 24 | Roll |
| 7100243950 | GPT020123800 | 3M [™] Double Coated Tape GPT-020F, Transparent, 12 mm x 3850 m, 0.2 mm | 1 | Roll |
| 7100226380 | GPT-020F 19MMX5M S | 3M [™] Double Coated Tape GPT-020F, Transparent, 19 mm x 5 m, 0.2 mm | 60 | Roll |
| 7100225996 | GPT-020F 19MMX50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 19 mm x 50 m, 0.2 mm | 15 | Roll |
| 7100243951 | GPT020192000 | 3M [™] Double Coated Tape GPT-020F, Transparent, 19 mm x 2000 mm, 0.2 mm | 1 | Roll |
| 7100225997 | GPT-020F 25MMX50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 25 mm x 50 m, 0.2 mm | 11 | Roll |
| 7100224385 | GPT-020F 50MMX50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 50 mm x 50 m, 0.2 mm | 6 | Roll |
| 7100224321 | GPT-020F 100MMX50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 100 mm x 50 m, 0.2 mm | 5 | Roll |
| 7100223650 | GPT-020F 1540X50M | 3M [™] Double Coated Tape GPT-020F, Transparent, 1540 mm x 50 m, 0.2 mm | 1 | Roll |
| 7100224762 | GPT-020F 1540X500M | 3M [™] Double Coated Tape GPT-020F, Transparent, 1540 mm x 500 m, 0.2 mm | 1 | Roll |
| 7100220792 | GPT-020F CONFIG | 3M [™] Double Coated Tape GPT-020F, Transparent, 1540 mm, 0.2mm, Config roll | 1 | Roll |

Scotch® ATG Adhesive Transfer Tape 904

3M[™] ATG Adhesive Transfer Tape 904 if you are a keen arts and crafts fan. It's quick and mess-free application is ideal for card making, scrapbooking and use with stationery. Our tape adheres instantly, has a long ageing bond and high shear force.



• Apply for instant adherence, a long ageing bond and high shear force

- Use if you're a keen arts and crafts fan
- Get quick and mess-free application

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116634 | 904625 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 6 mm x 25 m, 0.05 mm | 72 | Roll |
| 7000116673 | 904644 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 6 mm x 44 m, 0.05 mm | 48 | Roll |
| 7000116632 | 9041225 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 25 m, 0.05 mm | 72 | Roll |
| 7000042431 | 9041233 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 33 m, 0.05 mm | 72 | Roll |
| 7000116675 | 9041244G | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 44 m, 0.05 mm | 72 | Roll |
| 7000116674 | 9041244 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 12 mm x 44 m, 0.05 mm | 36 | Roll |
| 7000116631 | 9041925 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 25 m, 0.05 mm | 48 | Roll |
| 7000116671 | 9041944 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 44 m, 0.05 mm | 24 | Roll |
| 7000116672 | 9041944 | Scotch® ATG Adhesive Transfer Tape 904, Transparent, 19 mm x 44 m, 0.05 mm | 48 | Roll |

Scotch® ATG Adhesive Transfer Tape 924

Scotch® ATG Adhesive Transfer Tape 924 apply for various substrate or material combinations. Our transfer film tape is an acrylic, reverse wound, pressure sensitive adhesive on a densified kraft paper liner, for use with Scotch® ATG Adhesive Applicators.

- A great go-to general purpose adhesive transfer film tape. Offers high adhesion, good solvent resistance, and excellent UV resistance.
- Get high adhesion, good solvent resistance, and excellent ultraviolet (UV) resistance
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116658 | 924655 | Scotch® ATG Adhesive Transfer Tape 924, Transparent, 6 mm x 55 m, 0.05 mm | 48 | Roll |
| 7000042428 | 9241233 | Scotch® ATG Adhesive Transfer Tape 924, Transparent, 12 mm x 33 m, 0.05 mm | 72 | Roll |
| 7000116638 | 9241255 | Scotch® ATG Adhesive Transfer Tape 924, Transparent, 12 mm x 55 m, 0.05 mm | 72 | Roll |
| 7000116639 | 9241955 | Scotch® ATG Adhesive Transfer Tape 924, Transparent, 19 mm x 55 m, 0.05 mm | 48 | Roll |

Scotch® ATG Adhesive Transfer Tape 926

Scotch® ATG Adhesive Transfer Tape 926 is ideal for applications requiring high bond strength, high shear strength and high temperature performance. It offers chemical, moisture and UV resistance. Reverse wound on a unique 1 inch core designed for use with a Scotch® ATG Applicator.

- A high performance adhesive transfer film tape that works a wide variety of substrates and materials. It offers excellent solvent resistance and can be used in high temperature applications.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116661 | 568163 | Scotch® ATG Adhesive Transfer Tape 926, Transparent, 6 mm x 33 m, 0.13 mm | 48 | Roll |
| 7000116644 | 9261233 | Scotch® ATG Adhesive Transfer Tape 926, Transparent, 12 mm x 33 m, 0.13 mm | 72 | Roll |

Scotch® ATG Adhesive Transfer Tape 928

Scotch® ATG Repositionable Double Coated Tissue Tape 928 is a reverse wound, double coated tape with a white tissue carrier on a polycoated kraft (PKC) paper liner. It is designed for use in applications where two separate, but different, adhesives are required. One side is intended for permanent bonding while the other offers low tack adhesion for removal or repositioning.

- A high tack low tack repositionable pressure sensitive adhesive which allows removal from many papers, foils, and films.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000028874 | 9281216 | Scotch® ATG Adhesive Transfer Tape 928, White, 12 mm x 16.5 m, 0.05 mm | 72 | Roll |
| 7100016838 | 232265 | Scotch® ATG Adhesive Transfer Tape 928, White, 12 mm x 33 m, 0.05 mm | 72 | Roll |
| 7000048496 | 9281916 | Scotch® ATG Adhesive Transfer Tape 928, White, 19 mm x 16.5 m, 0.05 mm | 48 | Roll |

Scotch® ATG Adhesive Transfer Tape 969

Scotch® ATG Adhesive Transfer Tape 969 features very high initial adhesion and good shear holding power for bonding most plastics and glossy coated materials. Reverse wound on 1-inch diameter core for use in Scotch® ATG Applicators.

- A soft pressure sensitive adhesive system that features high initial adhesion and good holding power to a variety of materials including most plastics.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116611 | 969616 | Scotch® ATG Adhesive Transfer Tape 969, Transparent, 6 mm x 16.5 m, 0.13 mm | 48 | Roll |
| 7000116652 | 9691216 | Scotch® ATG Adhesive Transfer Tape 969, Transparent, 12 mm x 16.5 m, 0.13 mm | 12 | Roll |
| 7000116642 | 9691233 | Scotch® ATG Adhesive Transfer Tape 969, Transparent, 12 mm x 33 m, 0.13 mm | 72 | Roll |
| 7000116653 | 96919165 | Scotch® ATG Adhesive Transfer Tape 969, Transparent, 19 mm x 16.5 m, 0.13 mm | 12 | Roll |
| 7000116643 | 9691933 | Scotch® ATG Adhesive Transfer Tape 969, Transparent, 19 mm x 33 m, 0.13 mm | 48 | Roll |



Scotch® ATG Adhesive Transfer Tape 976

Scotch® ATG Adhesive Transfer Tape 976 is ideal for bonding materials with glossy coatings where an aggressive adhesive with high initial adhesion and low profile is desired. It offers very good relative chemical and moisture resistance as well as medium-high UV resistance. Reverse wound on 1-inch diameter core for use in Scotch® ATG Applicators.



- A soft pressure sensitive adhesive system that features high initial adhesion and good holding power to a variety of materials including most plastics.
- The ATG tape system delivers a controlled application of the adhesive while the liner rewinds into the ATG applicator. It bonds on contact, and works on a variety of substrate or material combinations.
- The ATG tape system is versatile, convenient, quick and easy to use. There is no mess or clean up. It is a cost effective replacement to rivets, staples, screws, bolts, liquid adhesives. Safer than hot melt adhesives.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116659 | 976655 | Scotch® ATG Adhesive Transfer Tape 976, Transparent, 6 mm x 55 m, 0.05 mm | 48 | Roll |
| 7000116640 | 9761255 | Scotch® ATG Adhesive Transfer Tape 976, Transparent, 12 mm x 55 m, 0.05 mm | 72 | Roll |
| 7000116641 | 9761955 | Scotch® ATG Adhesive Transfer Tape 976, Transparent, 19 mm x 55 m, 0.05 mm | 48 | Roll |

Membrane Switch Spacers

3M[™] Membrane Switch Spacer 7945MP

3M[™] Membrane Switch Spacer 7945MP is a 50µm 200MP high performance acrylic adhesive double coated on each side of 25µm polyester film carrier on a double liner of 107µm #58 printed moisture resistant lay-flat polycoated kraft paper

- 127µm Double Linered Membrane Switch Spacer with 200MP adhesive. #58lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100040451 | 7945 | 3M [™] Membrane Switch Spacer 7945MP, Transparent, 610 mm x 914 mm, 0.13 mm | 1 | Case |
| 7100040452 | 697679 | 3M [™] Membrane Switch Spacer 7945MP, Transparent, 700 mm x 1000 mm, 0.13 mm | 1 | Case |

3M[™] Membrane Switch Spacer 7953MP

3M[™] Membrane Switch Spacer 7953MP is a 38µm 200MP high-performance acrylic adhesive double coated on each side of 12µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft paper. Primary liner is printed.

- 90µm Double Linered Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Primary liner is printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100038656 | 7953 | 3M [™] Membrane Switch Spacer 7953MP, Transparent, 610 mm x 914 mm, 0.09 mm | 1 | Case |
| 7100039642 | 697766 | 3M [™] Membrane Switch Spacer 7953MP, Transparent, 700 mm x 1000 mm, 0.09 mm | 1 | Case |
| 7100104776 | 7953MPCONFIG | 3M [™] Membrane Switch Spacer 7953MP, Transparent, Configurable rolls | 1 | Roll |





3M[™] Adhesive Transfer Tape Double Linered 7952MP

3M[™] Adhesive Transfer Tape Double Linered 7952MP is a 50µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper

- 50µm double linered version of 3M Adhesive Transfer Tape 467MP on two #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100038810 | 7952 | 3M™ Adhesive Transfer Tape Double Linered 7952MP, 610 mm x 914 mm, 0.06 mm, CoA 100SH | 1 | Case |
| 7100104786 | 7952MPCONFIG | 3M™ Adhesive Transfer Tape Double Linered 7952MP, Jumbo 1220 mm width, Configurable rolls | 1 | Roll |
| 7100038631 | 697682 | 3M™ Adhesive Transfer Tape Double Linered 7952MP, Transparent, 700 mm x 1000 mm, 0.05 mm | 1 | Case |
| 7100038963 | 682325 | 3M [™] Adhesive Transfer Tape Double Linered 7952MP, Transparent, 1270 mm x 330 m, 0.05 mm | 2 | Roll |

3M[™] Adhesive Transfer Tape Double Linered 7955MP

3M[™] Adhesive Transfer Tape Double Linered 7955MP is a 127µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper

- 127µm double linered version of 3M Adhesive Transfer Tape 468MP on two #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. For selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100038584 | 7955 | 3M™ Adhesive Transfer Tape Double Linered 7955MP, Transparent, 610 mm x 914 mm, 0.13 mm | 1 | Case |
| 7100040300 | 697676 | 3M™ Adhesive Transfer Tape Double Linered 7955MP, Transparent, 700 mm x 1000 mm, 0.13 mm | 1 | Case |
| 7100038693 | 681411 | 3M™ Adhesive Transfer Tape Double Linered 7955MP, Transparent, 1270 mm x 329 m, 0.13 mm | 1 | Roll |
| 7100104793 | 7955MPCONFIG | 3M™ Adhesive Transfer Tape Double Linered 7955MP, Transparent, Jumbo 1220 mm width, Configurable rolls | 1 | Roll |



3M[™] Membrane Switch Spacer 7956MP

3M[™] Membrane Switch Spacer 7956MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 50µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft

- 152µm Double Linered Membrane Switch Spacer with 200MP adhesive. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100039643 | 7956 | 3M [™] Membrane Switch Spacer 7956MP, Transparent, 610 mm x 914 mm, 0.15 mm | 1 | Case |
| 7100039644 | 697757 | 3M [™] Membrane Switch Spacer 7956MP, Transparent, 700 mm x 1000 mm, 0.15 mm | 1 | Case |

3M[™] Membrane Switch Spacer 7956WDL

3M[™] Membrane Switch Spacer 7956WDL is a 152µm 3M[™] High Performance Acrylic Adhesive 200MP tape with a 50µm Silver Polyester Film (PET) carrier on 107µm Tan #58 Polycoated Kraft Paper (PCK) liners.

- 152µm Double Linered Membrane Switch Spacer with 200MP adhesiveon both sides of an opaque polyester film. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|-------|
| 7000049163 | 7956WDL24X36 | 3M [™] Membrane Switch Spacer 7956WDL, White, 610 mm x 914 mm, 0.15 mm | 100 | Sheet |

3M[™] Membrane Switch Spacer 7957MP

3M[™] Membrane Switch Spacer 7957MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 75µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polycoated kraft

- 175µm Double Linered Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accomodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100040288 | 684108 | 3M [™] Membrane Switch Spacer 7957MP, Transparent, 610 mm x 914 mm, 0.18 mm | 1 | Case |
| 7100039641 | 697768 | 3M [™] Membrane Switch Spacer 7957MP, Transparent, 700 mm x 1000 mm, 0.18 mm | 1 | Case |





3M[™] Membrane Switch Spacer 7959MP

3M[™] Membrane Switch Spacer 7959MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 127µm polyester film carrier with double liner of 107µm #58 moisture resistant lay-flat polyco-ated kraft

- 230µm Double Linered Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accomodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100040287 | 7959 | 3M [™] Membrane Switch Spacer 7959MP, Transparent, 610 mm x 914 mm, 0.23 mm | 1 | Case |
| 7100040285 | 697745 | 3M [™] Membrane Switch Spacer 7959MP, Transparent, 700 mm x 1000 mm, 0.23 mm | 1 | Case |

3M[™] Membrane Switch Spacer 7961MP

3M[™] Membrane Switch Spacer 7961MP is a 50µm 200MP high-performance acrylic adhesive double coated on each side of 175µm polyester film carrier with double liner of 107 µm #58 moisture resistant lay-flat polyco-ated kraft

- 280µm Double Linered Membrane Switch Spacer with 200MP adhesive. 58 lb lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Excellent moisture and solvent resistance. High temperature resistance. High shear strength accomodates the stresses of repeated actuation. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100039117 | 7961 | 3M [™] Membrane Switch Spacer 7961MP, Transparent, 610 mm x 914 mm, 0.28 mm | 1 | Case |
| 7100039413 | 697667 | 3M™ Membrane Switch Spacer 7961MP, Transparent, 700 mm x 1000 mm, 0.28 mm | 10 | Case |

3M[™] Adhesive Transfer Tape Double Linered 7962MP

3M[™] Adhesive Transfer Tape Double Linered 7962MP is a 50µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper and 155µm #83 polycoated kraft paper.

- \bullet 127 μm double linered version of 3M Adhesive Transfer Tape 467MP. #83 and #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100039645 | 7962 | 3M [™] Adhesive Transfer Tape Double Linered 7962MP, Transparent, 610 mm x 914 mm, 0.06 mm | 1 | Case |
| 7100040453 | 697756 | 3M™ Adhesive Transfer Tape Double Linered 7962MP, Transparent, 700 mm x 1000 mm, 0.06 mm | 1 | Case |





3M[™] Adhesive Transfer Tape Double Linered 7965MP

3M[™] Adhesive Transfer Tape Double Linered 7965MP is a 127µm 200MP high performance acrylic adhesive on double liner of 107µm #58 polycoated kraft paper and 155µm #83 polycoated kraft paper.

- \bullet 127 μm double linered version of 3M Adhesive Transfer Tape 468MP. #83 and #58 polycoated kraft paper liners.
- Excellent moisture and solvent resistance. Excellent high temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting. Ideal for graphic and nameplate attachment.
- Ideal for graphic and nameplate attachment. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100040454 | 7965 | 3M [™] Adhesive Transfer Tape Double Linered 7965MP, Transparent, 610 mm x 914 mm, 0.13 mm | 1 | Case |
| 7100039813 | 697753 | 3M [™] Adhesive Transfer Tape Double Linered 7965MP, Transparent, 700 mm x 1 m, 0.13 mm | 1 | Case |

3M[™] Membrane Switch Spacer 7966MWS

3M[™] Membrane Switch Spacer 7966MWS features a 2 mil white PET film carrier with a metallized vapor coat for added opacity, ideal for graphics. 3M[™] High Performance Acrylic Adhesive 200MP delivers excellent shear strength during repeated switch actuation and forms clean edges for precise slitting and die-cutting. A PCK paper liner resists humidity and adds stability for improved sheet processing.

- Metallized vapor coat on white-colored carrier creates outstanding opacity for graphics
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7000115755 | 796648 | 3M [™] Membrane Switch Spacer 7966MWS, 1220 mm x 165 m, Layflat Liner | 1 | Roll |
| 7100073000 | 7966MWSCONFIG | 3M [™] Membrane Switch Spacer 7966MWS, White, Jumbo 1220 mm width, Configurable rolls | 1 | Roll |

3M[™] Membrane Switch Spacer 7966WDL

3M[™] Membrane Switch Spacer 7966WDL is a double linered 442µm 3M[™] High Performance Acrylic Adhesive 200MP tape with a 50µm Silver Polyester Film (PET) carrier on 107µm Tan 58# Polycoated Kraft Paper (PCK) liners.

- 229µm Double Linered Membrane Switch Spacer with 200MP adhesiveon both sides of an opaque polyester film. 50µm adhesive on face side and 127µm on back side. #58 lay-flat polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049683 | 645120 | 3M [™] Membrane Switch Spacer 7966WDL, White, 610 mm x 914 mm, 0.23 mm | 1 | Case |







3M[™] Membrane Switch Spacer 7974MP

3M[™] Membrane Switch Spacer 7945MP is a 200MP high-performance acrylic adhesive double coated 75µm on face side and 127µm on back side of 127µm polyester film carrier with double liner of 127µm #58 moisture resistant lay-flat polycoated kraft paper. Primary liner is printed.

- 330µm Double Linered Membrane Switch Spacer with 200MP adhesive. #58 lay-flat polycoated kraft paper liners on each side. Primary liner is printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting. Used for graphic attachment.
- Provides outstanding adhesion to metal and high surface energy plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-------|
| 7000049682 | 639177 | 3M™ Membrane Switch Spacer 7974MP, Transparent, 610 mm x 914 mm, 0.107 mm | 50 | Sheet |

3M[™] Membrane Switch Spacer 7986MP

3M[™] Membrane Switch Spacer 7986MP for high performance circuit separation in switches until actuation. Our spacer offers excellent resistance to chemicals, temperature and humidity. It withstands softening through edge contact with mild acids, alkalis, oil, gas, kerosene and other solvents.

- 350µm Double Linered Membrane Switch Spacer with 200MP adhesive. 250µm polyester film carrier #58 polycoated kraft paper liners on each side. Both liners are printed.
- Ideal for circuit separation in switches until actuation. Easy to die-cut and process. Use for steel rule die-cutting.
- Provides excellent temperature, humidity and chemical resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100084174 | 709166 | 3M™ Membrane Switch Spacer 7986MP, Transparent, 610 mm x 914 mm, 0.35 mm | 10 | Case |

3M[™] Membrane Switch Spacer 7993MP

3M™ Membrane Switch Spacer Single Coated 7993MP is a 50µm 200MP high performance acrylic adhesive on one side of a 25µm mil white polyester film carrier on a 175µm #94 polycoated kraft paper liner

- 75µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 25µm mil clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100040455 | 716127 | 3M™ Membrane Switch Spacer 7993MP, Transparent, 610 mm x 914 mm, 0.08 mm | 1 | Case |





3M[™] Membrane Switch Spacer 7995MP

3M™ Membrane Switch Spacer Single Coated 7995MP is a 50µm 200MP high performance acrylic adhesive on one side of a 75µm white polyester film carrier on a 175µm #94 polycoated kraft paper liner

- 127µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 75µm clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100039416 | 697769 | 3M [™] Membrane Switch Spacer 7995MP, Transparent, 700 mm x 1000 mm, 0.13 mm | 1 | Case |

3M[™] Membrane Switch Spacer 7997MP

3M[™] Membrane Switch Spacer Single Coated 7997MP is a 50µm 200MP high performance acrylic adhesive on one side of a 127µm white polyester film carrier on a 175µm #94 polycoated kraft paper liner

- 175µm Membrane Switch Single Coated Spacer with 200MP Adhesive. 125µm clear polyester carrier. 94 lb lay-flat polycoated kraft paper liner.
- Clear polyester carrier brightens overlay and key pads eliminating need for floodcoat. Easy to die-cut and process. Smooth appearance on graphic overlays. Use for steel rule die-cutting and kiss cutting. Use to protect leads, hold domes in place or for building custom spacers.
- Excellent moisture and solvent resistance. Excellent temperature resistance and shear strength. UV resistant. Easy to apply. Not messy. Easily die-cutable. Use for selective die-cutting.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100040289 | 7997MP610914 | 3M [™] Membrane Switch Spacer 7997MP, Transparent, 610 mm x 914 mm, 0.18 mm | 1 | Case |

3M[™] Double Coated Tape 9495MP

3M[™] Double Coated Tape 9495MP provides high initial adhesion and good holding power on a variety of substrates. The thin, polyester film carrier offers dimensional stability and improved handling during slitting and die cutting.

- Adhesive 200MP provides exceptional temperature and chemical resistance for use in tough application environments
- Thin .013 mm clear polyester (PET) film carrier adds dimensional stability for improved handling
- Withstands high humidity conditions with minimal cockling or wrinkling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048856 | 9495686 | 3M™ Double Coated Tape 9495MP, Transparent, 686 mm x 165 m, 0.14 mm | 1 | Roll |







3M[™] Adhesive Transfer Tape Double Linered 8132LE

3M[™] Adhesive Transfer Tape 8132LE Ou is a double-linered version of 3M[™] Adhesive Transfer Tape 9471LE. Featuring 3M[™] 300LSE acrylic adhesive, this tape has a long and proven history of reliably bonding a wide variety of similar and dissimilar materials such as metals, most plastics, glass, papers and painted surfaces.

- 50µm 300LSE Adhesive Transfer Tape with double liners. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- Doubled linered version of 3M[™] Adhesive Transfer Tape 9471LE
- High adhesion to metals and high surface energy materials and lightly oiled metals with , making it suitable for bonding dissimilar substrates. Good resistance to industrial chemicals, consumer chemicals, moisture and humidity

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100089374 | 8132LE | 3M [™] Adhesive Transfer Tape Double Linered 8132LE, Transparent, 610 mm x 914 mm, 0.06 mm | 1 | Case |

3M[™] Adhesive Transfer Tape Double Linered 8153LE

3M[™] Adhesive Transfer Tape Double Linered 8153LE to bond high and low surface energy plastics, powder coated paints, and lightly oily metals. Our double linered adhesive transfer tape is ideal for use on electronic devices. It has excellent shear properties.

- 90µm 300LSE Adhesive Transfer Tape with double liners. Excellent bond to low surface energy substrates including powder coatings and plastics such as polypropylene (PP)
- Doubled linered version of 3M[™] Adhesive Transfer Tape 9453LE
- High adhesion to metals and high surface energy materials and lightly oiled metals with , making it suitable for bonding dissimilar substrates. Good resistance to industrial chemicals, consumer chemicals, moisture and humidity

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100089375 | 714332 | 3M [™] Adhesive Transfer Tape Double Linered 8153LE, Transparent, 610 mm x 914 mm, 0.09 mm | 1 | Case |
| 7100104781 | 8153LECONFIG | 3M™ Adhesive Transfer Tape Double Linered 8153LE, Transparent, Configurable rolls | 1 | Roll |



Bonding Tapes

3M[™] Double Coated Tissue Tape 9448A

3M[™] Double Coated Tissue Tape 9448A is a 0.15 mm double sided tape with a medium firm acrylic adhesive on a tissue carrier that provides dimensional stability, improved handling and ease of die-cutting and laminating. The adhesive provides excellent peel strength adhesion, with good high temperature holding power to a variety of surfaces.

- Medium-firm acrylic adhesive system featuring high initial adhesion
- Good high temperature holding power
- Nameplate bonding, plastic film lamination/bonding, splicing, and foam bonding

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000038379 | 613665 | 3M [™] Double Coated Tissue Tape 9448A, White, 1200 mm x 50 m, 0.15 mm | 1 | Roll |

3M™ Double Coated Tape 9040

3M[™] Double-Coated Tape 9040 is a general-purpose double-coated tissue tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a tissue carrier and an easy to remove siliconised paper liner.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Get good processing and die-cutting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000111533 | 904019 | 3M [™] Double Coated Tape 9040, Transparent, 19 mm x 50 m, 0.18 mm | 48 | Roll |
| 7000111534 | 258831 | 3M™ Double Coated Tape 9040, Transparent, 25 mm x 50 m, 0.18 mm | 36 | Roll |
| 7000111535 | 704319 | 3M [™] Double Coated Tape 9040, Transparent, 50 mm x 50 m, 0.18 mm | 16 | Roll |
| 7000041765 | 90401000 | 3M [™] Double Coated Tape 9040, Transparent, 1000 mm x 50 m, 0.18 mm | 1 | Roll |

3M[™] Double Coated Tape 90080

3M[™] Double Coated Tape 90080 supported non-woven fabric offers a lot of flexibility and versatility in the various applications. The 3M[™] Double Coated Tape 90080 acrylic adhesive allows excellent results even on surfaces with low surface energies.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Get good processing and die-cutting properties

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000037777 | 661919 | 3M [™] Double Coated Tape 90080, Transparent, 1200 mm x 50 m | 1 | Roll |





3M[™] Double Coated Tissue Tape CT6348

3M[™] CT-6348 Double-Sided Tissue Tape provides high initial adhesion to a variety of surfaces.

- 3,5 mil double coated tape with nonwoven carrier on a siliconized liner
- \bullet High tack level offers high immediate adhesion
- Flexible to conform to irregular surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100039155 | 5 691769 | 3M™ Double Coated Tissue Tape CT6348, White, 1030 mm x 50 m, 0.10 mm | 40 | Roll |
| 7100039714 | 4 698748 | 3M™ Double Coated Tissue Tape CT6348, White, 1030 mm x 1000 m, 0.10 mm | 4 | Roll |
| 710008629 | 1 712603 | 3M [™] Double Coated Tissue Tape CT6348, White, 1220 mm x 1000 m, 0.10 mm | 4 | Roll |

3M[™] Double Coated Tape 9080HL

3M[™] Double Coated Tape 9080HL is a Double Coated Non-woven Tape with Polycoated Paper Liner. High tack adhesive suitable for high temperature and bonding to LSE materials.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000115871 | 9080HL12 | 3M [™] Double Coated Tape 9080HL, White, 12 mm x 50 m, 0.16 mm | 96 | Roll |
| 7000115873 | 9080HL19 | 3M [™] Double Coated Tape 9080HL, White, 19 mm x 50 m, 0.16 mm | 60 | Roll |
| 7000115874 | 9080HL25 | $3M^{\scriptscriptstyle \rm M}$ Double Coated Tape 9080HL, White, 25 mm x 50 m, 0.16 mm | 48 | Roll |
| 7000115875 | 9080HL38 | 3M [™] Double Coated Tape 9080HL, White, 38 mm x 50 m, 0.16 mm | 32 | Roll |
| 7000115876 | 9080HL50 | $3M^{\scriptscriptstyle \rm M}$ Double Coated Tape 9080HL, White, 50 mm x 50 m, 0.16 mm | 24 | Roll |
| 7000042435 | 9080HL1200 | 3M [™] Double Coated Tape 9080HL, White, 1200 mm x 50 m, 0.16 mm | 1 | Roll |

3M[™] Double Coated Polyester Tape 9731

3M[™] Double Coated Tape 9731 is a high performance 140µm carrier with silicone coated inside and acrylic adhesive coated outside. Double liner of 100µml polyester film and 127µm polycoated kraft paper. High temperature and medium solvent resistance, high HSE and LSE

- 350 adhesive provides excellent solvent resistance and adhesion to low surface energy materials, Silicone adhesive bonds silicone and low surface energy plastics without primer using this pressure sensitive solution
- Silicone features strong holding power to various silicone surfaces. Acrylic has the ability to bond a variety of surfaces including low surface energy plastics, powder coatings, and oily materials.
- Achieve very high adhesion to a variety of materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049097 | 638349 | 3M [™] Double Coated Polyester Tape 9731, Transparent, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7000049120 | 9731610 | 3M™ Double Coated Polyester Tape 9731, Transparent, 610 mm x 33 m, 0.14 mm | 1 | Roll |
| 7000001317 | 643149 | 3M™ Double Coated Polyester Tape 9731, Transparent, 1219 mm x 33 m, 0.14 mm | 1 | Roll |







3M[™] Removable Repositionable Double Coated Tape 9425HT

3M[™] Double Coated Tape 9425HT 152µm double coated tape with high tack acrylic adhesive 420 on one side and medium tack acrylic adhesive 1050 on the other side on a 58 lb. polycoated kraft paper liner with a PET carrier.

- 1.4 mil PET carrier coated with 2.2 mil 420 adhesive on face side and 2.2 mil 1050 adhesive on back side. Removable repositionable double coated tape
- The PET film carrier provides differential stability which offers improved handling for laminating and die-cutting. High temperature applications.
- Use in high temperature applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000029041 | 643151 | 3M [™] Removable Repositionable Double Coated Tape 9425HT, Transparent, 1219 mm x 55 m, 0.13 mm | 1 | Roll |

3M[™] Removable Repositionable Double Coated Tape 9415PC

3M[™] Removable Repositionable Tape 9415PC is an acrylic adhesive 400 and 1000 on a 78 lb polycoated kraft paper liner and polyester film carrier. High tack/low tack. Medium temperature and low solvent resistance. Medium/low HSE and low LSE.

- 25µm polyester film carrier on a 50µm removable repositionable double coated tape
- Work with lightweight materials such as paper, plastics, films or foams
- These double coated tapes feature a permanent adhesive on the face side and a removable repositionab
 - le adhesive on the back side of the tape. For repositioning or multiple openings and closings.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|---|-----|------|
| 7000048706 | 9415PC 1INX72YD B | 3M [™] Removable Repositionable Double Coated Tape 9415PC, Transparent, 25 mm x 66 m, 0.05 mm | 36 | Roll |
| 7000001226 | 643146 | 3M [™] Removable Repositionable Double Coated Tape 9415PC, Transparent, 1219 mm x 66 m, 0.05 mm | 1 | Roll |

3M[™] Laminating Adhesive 932FL

3M[™] Laminating Adhesive 932FL features a weather- and chemical-resistant acrylic adhesive formulated for smooth and HSE surfaces. This 2 mil adhesive is applied to a clear 3 mil polyester (PET) liner that adds strength and allows for fast, efficient visual surface inspection before removal. A 58-Ib. PCK secondary liner provides moisture stability even in high humidity.

- Durable double-linered adhesive ideal for graphic overlays
- 2 mil (0.051 mm) utility acrylic adhesive is formulated for smooth and HSE surfaces
- Clear 3 mil PET film liner resists breakage, allows for quick surface inspection before removal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100131817 | 932FL110X600 | 3M [™] Laminating Adhesive 932FL, Transparent, 110.8 mm x 600 m | 1 | Roll |
| 7100117487 | 932FL111 | 3M [™] Laminating Adhesive 932FL, Transparent, 111 mm x 300 m | 36 | Roll |
| 7100132669 | 932FL521 | 3M [™] Laminating Adhesive 932FL, Transparent, 521 mm x 600 m | 2 | Roll |
| 7100104798 | 932FLCONFIG | 3M [™] Laminating Adhesive 932FL, Transparent, Configurable rolls | 1 | Roll |





3M[™] Adhesive Transfer Tape 966

3M[™] Adhesive Transfer Tape 966 leverages the power of 3M[™] High Temperature Acrylic Adhesive 100 to produce an excellent high temperature, high strength and chemical resistant bond suitable to the demands of aerospace, automotive and electronics markets. It provides low outgassing properties necessary to deliver optimal performance in demanding applications.

- Transparent, double sided, 50µm adhesive transfer tape offers a thin profile combined with our high temperature acrylic adhesive for a long-lasting bond
- Get excellent solvent and UV resistance with 3M[™] Adhesive Transfer Tape 966. Our tape has a high peel strength compared to other acrylic adhesives and works well as a high temperature attachment. Ideal for the aerospace and electronics industries. Low outgassing properties benefit aerospace, automotive and electronics industries
- Use 3M[™] Adhesive Transfer Tape 966 as the perfect tool within the aerospace and electronics industries, with its high peel strength compared to other acrylic adhesives and ability to work well as a high temperature attachment. Our tape gives excellent solvent and UV resistance. It's a high temperature acrylic adhesive with densified kraft paper liner that can reduce edge burr in hard tool processing of metal plates. It can also be used for flex circuit attachment.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048580 | 966305X | 3M™ Adhesive Transfer Tape 966, Transparent, 305 mm x 55 m, 0.06 mm | 4 | Roll |

3M[™] Ultra High Temperature Double Coated Tape 9077

3M[™] Ultra High Temperature Double Coated Tape 9077 is a 2.0 mil clear double-coated adhesive tape designed for continued adhesion in high-temperature environments up to 500°F/260°C. It features a 2 mil 3M[™] Ultra High Temperature Acrylic Adhesive 100HT, excellent for use in FPC attachment and for HSE metals. A 3.6 mil heat-resistant non-woven liner adds stability for die-cutting and converting.

- High temperature adhesive and release liner survives short term exposure to 500°F/260°C for lead-free solder reflow
- Maintains high adhesion strength in high temperatures, excellent for heat-intensive processing
- Ideal for flexible printed circuit (FPC) attachments and HSE metals

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------------|--|-----|------|
| 7000091410 | 9077 HT 500MMX100M | $3 \mbox{M}^{\mbox{\tiny \sc w}}$ Ultra High Temperature Double Coated Tape 9077, Transparent, 500 mm x 100 m, 0.05 mm | 1 | Roll |

3M[™] Adhesive Transfer Tape 927

3M™ Adhesive Transfer Tape 927 is a 300 high strength acrylic adhesive with 50µm, #60 densified kraft paper liner.

- 50µm adhesive transfer tape. #60 densified kraft paper liner. For a wide variety of materials. 300 high strength acrylic adhesive. Meets US government specification MIL-P-19834B, Amendment 1.
- Used as a general purpose transfer tape for a variety of high tack, thin applications. Ideal for a wide variety of similar and dissimilar materials where an aggressive adhesive with high initial adhesion is desired. Splicing of film, foils, fabrics. Laminating foams, photos, fabrics, metal or plastic nameplates.
- Use for situations needing excellent UV and chemical resistance ideal for high tack, thin applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116585 | 9271200 | 3M™ Adhesive Transfer Tape 927, Transparent, 1200 mm x 55 m, 0.05 mm | 1 | Roll |
| 7000116670 | 564271 | $3 \ensuremath{M}\xspace^{\times}$ Adhesive Transfer Tape 927, Transparent, 1200 mm x 250 m, 0.05 mm | 1 | Roll |









3M[™] Adhesive Transfer Tape 950

3M™ Adhesive Transfer Tape 950 is a 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.

- 130µm adhesive transfer tape #60 densified kraft paper liner. For a wide variety of materials. 300 high strength acrylic adhesive. UL approved. Meets US government specification MIL-P-19834B, Amendment 1.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- Use for a variety of high tack, thin applications where an aggressive adhesive with high initial adhesion is needed

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116560 | 9509 | 3M [™] Adhesive Transfer Tape 950, Transparent, 9 mm x 55 m, 0.13 mm | 96 | Roll |
| 7000116554 | 6506 | 3M [™] Adhesive Transfer Tape 950, Transparent, 12 mm x 10 m, 0.13 mm | 48 | Roll |
| 7000116655 | 95012 | 3M™ Adhesive Transfer Tape 950, Transparent, 12 mm x 55 m, 0.13 mm | 18 | Roll |
| 7000116555 | 9501955 | 3M [™] Adhesive Transfer Tape 950, Transparent, 19 mm x 55 m, 0.13 mm | 48 | Roll |
| 7000116657 | 95019 | 3M™ Adhesive Transfer Tape 950, Transparent, 19 mm x 55 m, 0.13 mm | 12 | Roll |
| 7000116559 | 95025 | 3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm | 36 | Roll |
| 7000116656 | 95025 | 3M™ Adhesive Transfer Tape 950, Transparent, 25 mm x 55 m, 0.13 mm | 9 | Roll |
| 7000116664 | 95040X50 | 3M™ Adhesive Transfer Tape 950, Transparent, 40 mm x 55 m, 0.13 mm | 20 | Roll |
| 7000116558 | 546014 | 3M [™] Adhesive Transfer Tape 950, Transparent, 50 mm x 55 m, 0.13 mm | 20 | Roll |
| 7000116666 | 551506 | 3M™ Adhesive Transfer Tape 950, Transparent, 65 mm x 55 m, 0.13 mm | 24 | Roll |
| 7000116648 | 95010055 | 3M [™] Adhesive Transfer Tape 950, Transparent, 100 mm x 55 m, 0.13 mm | 12 | Roll |
| 7000116636 | 950383 | 3M™ Adhesive Transfer Tape 950, Transparent, 383 mm x 55 m, 0.13 mm | 3 | Roll |
| 7000116615 | 950400 | 3M™ Adhesive Transfer Tape 950, Transparent, 400 mm x 55 m, 0.13 mm | 3 | Roll |
| 7000116561 | 9501000 | 3M™ Adhesive Transfer Tape 950, Transparent, 1000 mm x 55 m, 0.13 mm | 1 | Roll |
| 7000116587 | 9501200 | 3M™ Adhesive Transfer Tape 950, Transparent, 1200 mm x 55 m, 0.13 mm | 1 | Roll |

3M[™] Adhesive Transfer Tape 9471

3M™ Adhesive Transfer Tape 9471 is a 50µm 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.

- 50tµm high tack adhesive transfer tape for rotary die-cutting processes. #60 densified kraft paper liner. For a wide variety of surfaces.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- High and low surface energy plastics, textured plastics, foams, fabrics, and coated papers. For smooth LSE plastics.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000115647 | 9471610 | 3M [™] Adhesive Transfer Tape 9471, Transparent, 610 mm x 55 m, 0.05 mm | 1 | Roll |



3M[™] Adhesive Transfer Tape 9472

3M™ Adhesive Transfer Tape 9472 is a 130µm 300 high strength acrylic adhesive on a 90µm #60 densified kraft paper liner.

- 130µm high tack adhesive transfer tape for rotary die-cutting processes. 60 lb densified kraft paper liner. For a wide variety of surfaces.
- Good UV resistance. Good chemical resistance. Ideal for high surface energy (HSE) and low surface energy (LSE) materials.
- High and low surface energy plastics, textured plastics, foams, fabrics, and coated papers. For textured surfaces.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000115660 | 533702 | 3M™ Adhesive Transfer Tape 9472, Transparent, 610 mm x 55 m, 0.13 mm | 1 | Roll |
| 7000115666 | 534343 | 3M™ Adhesive Transfer Tape 9472, Transparent, 1220 m x 55 m, 0.05 mm | 1 | Roll |
| 7100104799 | 9472CONFIG | 3M [™] Adhesive Transfer Tape 9472, Transparent, Jumbo 1540 mm width, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9482PC

3M™ Adhesive Transfer Tape 9482PC is a 350 high performance acrylic adhesive on a 107µm #62 polycoated kraft paper liner

- 50µm adhesive transfer tape. #62 polycoated kraft paper liner for steel rule die-cutting. Meets UL specification. 350 High Performance Acrylic Adhesive.
- High tack and shear strength. Excellent temperature and solvent resistance. Excellent adhesion to plastics and foams. Used for joining materials that are relatively smooth, thin and have low residual stress.
- Contains a fiber reinforced adhesive which is important for roll stability in narrow widths. Designed for temperature exposure to 232 degree Celcius for short periods of time. Ideal for bonding a wide variety of similar and dissimilar materials.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7000115671 | 94821000 | 3M [™] Adhesive Transfer Tape 9482PC, Transparent, 1000 mm x 55 m, 0.05 mm | 2 | Roll |
| 7100104800 | 9482PCCONFIG | 3M™ Adhesive Transfer Tape 9482PC, Transparent, Configurable | 1 | Roll |





3M[™] Adhesive Transfer Tape 9485PC

3M™ Adhesive Transfer Tape 9485PC is a 350 high performance acrylic adhesive on a 107µm #62 polycoated kraft paper liner

- 127µm adhesive transfer tape. #62 polycoated kraft paper liner for steel rule die-cutting. Meets UL specification. 350 High Performance Acrylic Adhesive.
- High tack and shear strength. Excellent temperature and solvent resistance. Excellent adhesion to plastics and foams. Used for joining materials that are relatively smooth, thin and have low residual stress.
- Contains a fiber reinforced adhesive which is important for roll stability in narrow widths. Designed for temperature exposure to 232 degree Celsius for short periods of time. Ideal for bonding a wide variety of similar and dissimilar materials.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7000115673 | 535211 | 3M™ Adhesive Transfer Tape 9485PC, Transparent, 19 mm x 55 m, 0.13 mm | 12 | Roll |
| 7000115640 | 9485508 | 3M™ Adhesive Transfer Tape 9485PC, Transparent, 508 mm x 55 m, 0.13 mm | 2 | Roll |
| 7000115525 | 542201 | 3M™ Adhesive Transfer Tape 9485PC, Transparent, 610 mm x 55 m, 0.13 mm | 1 | Roll |
| 7000042346 | 94851200 | 3M™ Adhesive Transfer Tape 9485PC, Transparent, 1200 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100104801 | 9485PCCONFIG | 3M [™] Adhesive Transfer Tape 9485PC, Transparent, Jumbo 1220 mm width, 0.13 mm, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9605

3M™ Adhesive Transfer Tape 9605 is the standard transfer adhesive from 3M. This transparent adhesive film has a high degree of immediate stickiness and shear strength.



- 50µm acrylic adhesive transfer tape on white polycoated paperliner
- Medium-firm acrylic adhesive system. It features an excellent balance of high initial adhesion (quick stick) and good shear holding power
- Bond strength generally increases somewhat with natural ageing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116623 | 960519 | 3M™ Adhesive Transfer Tape 9605, Transparent, 19 mm x 50 m, 0.05 mm | 48 | Roll |
| 7000042432 | 96051200 | 3M™ Adhesive Transfer Tape 9605, Transparent, 1200 mm x 50 m, 0.05 mm | 1 | Roll |

3M[™] Adhesive Transfer Tape 9626

3M™ Adhesive Transfer Tape 9626 50µm 360 high performance quick stick acrylic adhesive on a 80µm glassine paper liner

- 50µm adhesive transfer tape on a 80µm glassine paper liner. Quick stick adhesion. Immediate bond.
- Join materials immediately with quick stick adhesion
- Adhesive tape has exceptional adhesion properties and bonds well to high and low surface energy

plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001482 | 962654 | 3M [™] Adhesive Transfer Tape 9626, Transparent, 1372 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100012272 | 9626CONFIG | 3M [™] Adhesive Transfer Tape 9626, Transparent, Configurable rolls | 1 | Roll |

3M[™] Adhesive Transfer Tape 9627

3M™ Adhesive Transfer Tape 9627 127µm 360 high performance quick stick acrylic adhesive on a 80µm glassine paper liner

- 127µm adhesive transfer tape on a 80µm glassine paper liner. Quick stick adhesion. Immediate bond.
 Join materials immediately with quick stick adhesion
- Adhesive tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000049547 | 9627686 | 3M™ Adhesive Transfer Tape 9627, Transparent, 686 mm x 55 m, 0.13 mm | 1 | Roll |
| 7100012241 | 9627CONFIG | 3M [™] Adhesive Transfer Tape 9627, Transparent, Configurable rolls | 1 | Roll |

3M[™] Double Coated Tape 9629PC

3M[™] Coated Polyester Tape 9629PC 100µm 360 high performance quick stick acrylic adhesive double coat with a clear polyester (PET) carrier on a 107µm PCK #58 paper liner

- 100µm double coated tape on a PET polyester carrier with a #58 polycoated kraft PCK paper liner.
- Join materials immediately with quick stick adhesion
- Double coated tape has exceptional adhesion properties and bonds well to high and low surface energy plastics HSE LSE such as HDPE, PP, ABS, polycarbonate, PMMA; powder coated paints. Has excellent quick stick properties.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000115779 | 962919 | 3M [™] Double Coated Tape 9629PC, Transparent, 19 mm x 55 m, 0.1 mm | 48 | Roll |

3M[™] High Performance Double Coated Tape 9084

3M[™] High Performance Double Coated Tape 9084 is a 10.2 mil double coated tape with Adhesive 375, PVC carrier 1.5 mils, tape is white in color.

- 100µm, thick double coated tape with tissue carrier. Hand tearable, conformable and easy handling. Paper liner.
- Thin, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape.
- Tear easily by hand and handles with ease due to its conformability

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000071748 | 908412 | 3M™ High Performance Double Coated Tape 9084, Creme, 12 mm x 50 m, 0.1 mm | 100 | Roll |
| 7000071750 | 908419 | 3M™ High Performance Double Coated Tape 9084, Creme, 19 mm x 50 m, 0.1 mm | 60 | Roll |
| 7000071751 | 908425 | 3M [™] High Performance Double Coated Tape 9084, Creme, 25 mm x 50 m, 0.1 mm | 50 | Roll |
| 7000071753 | 908450 | 3M™ High Performance Double Coated Tape 9084, Creme, 50 mm x 50 m, 0.1 mm | 25 | Roll |





3M[™] Double Coated Paper Tape 9086

3M™ High Performance Double Coated Tape 9086 is a 190µm Double coated tape with Adhesive 375, tissue carrier, translucent in color on a white paper liner with black 3M logo



- 190µm, thick double coated tape with tissue carrier. Hand tearable, conformable and easy handling. Paper liner.
- Thick, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape. High peel and shear strength, and resi
- Tear easily by hand and handles with ease due to its conformability

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000033072 | 90861550 | 3M™ Double Coated Paper Tape 9086, Transparent, 1550 mm x 50 m, 0.19 mm | 1 | Roll |
| 7000071739 | 90869 | 3M™ Double Coated Paper Tape 9086, White, 9 mm x 50 m, 0.19 mm | 156 | Roll |
| 7000071740 | 90861250 | 3M™ Double Coated Paper Tape 9086, White, 12 mm x 50 m, 0.19 mm | 120 | Roll |
| 7000071741 | 908615 | 3M™ Double Coated Paper Tape 9086, White, 15 mm x 50 m, 0.19 mm | 96 | Roll |
| 7000071742 | 908619 | 3M™ Double Coated Paper Tape 9086, White, 19 mm x 50 m, 0.19 mm | 72 | Roll |
| 7000071743 | 908625 | 3M [™] Double Coated Paper Tape 9086, White, 25 mm x 50 m, 0.19 mm | 54 | Roll |
| 7000071744 | 908650 | 3M™ Double Coated Paper Tape 9086, White, 50 mm x 50 m, 0.19 mm | 30 | Roll |
| 7000071745 | 90861000 | 3M [™] Double Coated Paper Tape 9086, White, 1000 mm x 50 m, 0.19 mm | 1 | Roll |

3M[™] Double Coated PVC Tape 9087

3M[™] High Performance Double Coated Tape 9087 is a 260µm double coated tape with Adhesive 375, PVC carrier 38µm, tape is white in color on a white paper liner with green 3M logo



- 260µm thick double coated tape with a PVC, polyvinyl chloride carrier. This tape with adhesive on both sides of a thick PVC carrier for easy handling. Paper liner.
- Thick, double coated film tape with acrylic adhesive. High tack, immediate bond, quick stick, high adhesion and good initial adhesion to a wide variety of materials or surfaces. High strength. Solvent resistant tape.
- Bond smooth, rough or textured surfaces with high tack, immediate bond, quick stick and high adhesion

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000071737 | 908738 | 3M [™] Double Coated PVC Tape 9087, White, 8 mm x 50 m, 0.26 mm | 24 | Roll |
| 7000071732 | 90879 | 3M™ Double Coated PVC Tape 9087, White, 9 mm x 50 m, 0.26 mm | 104 | Roll |
| 7000071733 | 90871250 | $3M^{\scriptscriptstyle \rm M}$ Double Coated PVC Tape 9087, White, 12 mm x 50 m, 0.26 mm | 80 | Roll |
| 7000071735 | 90871950 | 3M [™] Double Coated PVC Tape 9087, White, 19 mm x 50 m, 0.26 mm | 48 | Roll |
| 7000071736 | 908725 | $3M^{\scriptscriptstyle \rm M}$ Double Coated PVC Tape 9087, White, 25 mm x 50 m, 0.26 mm | 36 | Roll |
| 7000071738 | 908750 | $3M^{\scriptscriptstyle \rm M}$ Double Coated PVC Tape 9087, White, 50 mm x 50 m, 0.26 mm | 20 | Roll |
| 7000006772 | 90871000 | 3M [™] Double Coated PVC Tape 9087, White, 1000 mm x 50 m, 0.26 mm | 1 | Roll |

3M[™] Double Coated Tape 415

3M™ Double Coated Tape 415 is a 100µm double coated polyester with acrylic adhesive 400 on a 100µm # 60 densified kraft paper liner

- 100µm double coated tape on PET polyester carrier with #60 densified kraft DK paper liner
- Excellent UV resistance. Good adhesion to a wide variety of materials such as HSE high surface energy,
- LSE low surface energy and metals. Good temperature and humidity resistance.
- Stick materials with HSE high surface energy, LSE low surface energy and metals

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000123279 | 672192 | 3M™ Double Coated Tape 415, Transparent, 12.7 mm x 33 m, 0.1 mm | 72 | Roll |
| 7000042758 | 4152533 | 3M™ Double Coated Tape 415, Transparent, 25 mm x 33 m, 0.1 mm | 36 | Roll |
| 7000048399 | 48308 | 3M [™] Double Coated Tape 415, Transparent, 51 mm x 33 m, 0.1 mm | 24 | Roll |
| 7100037923 | 41569 | 3M [™] Double Coated Tape 415, Transparent, 69 mm x 66 m, 0.1 mm | 12 | Roll |
| 7000123281 | 665973 | 3M™ Double Coated Tape 415, Transparent, 305 mm x 33 m, 0.1 mm | 4 | Roll |

3M[™] Adhesive Transfer Tape 465

3M™ Adhesive Transfer Tape 465 is a 50µm high tack acrylic adhesive 400 with 90µm #60 densified kraft paper liner.

- 50µm adhesive transfer tape with easy liner release for manual or hand applications. Fibered adhesive transfer tape.
- Apply to printing applications such as splicing, core starting, flexo and laminating
- High tack, excellent adhesion to most paper stocks. Good low temperature performance and peel strength on many surfaces.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000116596 | 465955 | 3M™ Adhesive Transfer Tape 465, Transparent, 9 mm x 55 m, 0.05 mm | 96 | Roll |
| 7000042430 | 46512 | 3M™ Adhesive Transfer Tape 465, Transparent, 12 mm x 55 m, 0.05 mm | 72 | Roll |
| 7000116597 | 46519 | 3M™ Adhesive Transfer Tape 465, Transparent, 19 mm x 55 m, 0.05 mm | 48 | Roll |
| 7000116594 | 46525 | 3M™ Adhesive Transfer Tape 465, Transparent, 25 mm x 55 m, 0.05 mm | 36 | Roll |
| 7000116595 | 4653855 | 3M™ Adhesive Transfer Tape 465, Transparent, 38 mm x 55 m, 0.05 mm | 24 | Roll |
| 7000042429 | 46550 | 3M™ Adhesive Transfer Tape 465, Transparent, 50 mm x 55 m, 0.05 mm | 20 | Roll |

3M[™] Double Coated Polyethylene Tape 9576

Our 3M[™] Double Coated Tape 9576 is made from 4.0 mil double coated clear polypropylene with acrylic adhesive 400 on a 4 mil 27.2 kilo tan densified kraft paper liner.

- 4 mil clear double coated tape on a tan 60 DK liner
- High-tack, double-coated tape with proven performance for paper web splicing and general purpose bonding
- Excellent flying splice and core starting characteristics. Wet grab. Process speeds in excess of 609.6 metres per minute

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000048748 | 957650 | $3 M^{\mbox{\tiny M}}$ Double Coated Polyethylene Tape 9576, Transparent, 50 mm x 50 m, 0.102 mm | 24 | Roll |



3M[™] Adhesive Transfer Tape Y9417

3M 9417 is permanent adhesive in the sense that it does not degrade when sandwiched between two impermeable surfaces in normal use. 9417 is well suited for bonding together a wide variety of similar and dissimilar materials such as metals, glass, wood, papers, paints, and many plastics.



- High speed flying splices on most grades of paper such as newsprint, clay coated, corrugated stocks.
- Splicing of foils, films and fabrics. Attaching labels or instructions to bottles. Laminating adhesive for foams, photos. Attaching metal or plastic nameplates. Core starting.
- Mounting promotional items posters, etc. Mounting rubber or photopolymer printing plates. Reclosable plastic bags. Miscellaneous joining and holding where high initial adhesion, easy liner release and a thin, long ageing bond is required.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116576 | 941750UK | 3M [™] Adhesive Transfer Tape Y9417, Transparent, 50 mm x 100 m, 0.05 mm | 60 | Roll |
| 7000116590 | 711068 | 3M [™] Adhesive Transfer Tape Y9417, Transparent, 1200 mm x 110 m, 0.05 mm | 1 | Roll |

3M[™] Double Coated Tape 9576B

Our 3M[™] Double Coated Tape 9576B is made from 4.0 mil double coated black polypropylene with acrylic adhesive 400 on a 4 mil 27.2 kilo tan densified kraft paper liner.


- 4 mil clear double coated tape on a tan 60 DK liner
- High-tack, double-coated tape with proven performance for paper web splicing and general purpose bonding
- Excellent flying splice and core starting characteristics. Wet grab. Process speeds in excess of 609.6 metres per minute

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048746 | 9576B50 | 3M [™] Double Coated Tape 9576B, Black, 50 mm x 50 m, 0.102 mm | 24 | Roll |

3M[™] Double Coated Paper Tape 410M

3M™ Double Coated Paper Tape 410M is a127µm double coated paper tape with rubber adhesive 850 on a 75µm #54 densified Kraft green plaid paper liner.

- 127µm natural rubber double coated tape for core starting, end tabbing of papers, films and foils.
- Get good initial adhesion to a variety of surfaces
- Achieve increased strength and stability when applied



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049273 | 533257 | 3M™ Double Coated Paper Tape 410B, Natural, 19 mm x 33 m, 0.15 mm | 48 | Roll |
| 7000049275 | 410M50 | 3M [™] Double Coated Paper Tape 410B, Natural, 51 mm x 33 m, 0.15 mm | 24 | Roll |
| 7000049274 | 410M25 | 3M [™] Double Coated Paper Tape 410M, Natural, 25 mm x 33 m, 0.15 mm | 36 | Roll |
| 7000049322 | 410M3 | 3M [™] Double Coated Paper Tape 410M, Natural, 76 mm x 33 m, 0.15 mm | 12 | Roll |
| 7000049325 | 566805 | $3 M^{\scriptscriptstyle \rm M}$ Double Coated Paper Tape 410M, Natural, 305 mm x 33 m, 0.15 mm | 1 | Roll |
| 7000049326 | 4103815 | 3M [™] Double Coated Paper Tape 410M, Natural, 381 mm x 33 m, 0.15 mm | 1 | Roll |

3M[™] Double Coated Paper Tape 9527

3M™ Double Coated Paper Tape 9527 is a medium-firm rubber-resin pressure sensitive adhesive system. It features an excellent balance of high initial adhesion and good holding power to a wide variety of materials.

- 130µm rubber adhesive on a poly coated liner.
- Achieve an excellent balance of high initial adhesion and good holding power
- Bond a wide variety of similar and dissimilar materials such as rubbers, metals, wood, glass, paints and plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000111526 | 952719 | 3M [™] Double Coated Paper Tape 9527, Creme, 19 mm x 50 m, 0.13 mm | 48 | Roll |
| 7000111527 | 952725 | 3M [™] Double Coated Paper Tape 9527, Creme, 25 mm x 50 m, 0.13 mm | 36 | Roll |
| 7000041764 | 576961 | 3M [™] Double Coated Paper Tape 9527, Creme, 1000 mm x 50 m, 0.13 mm | 1 | Roll |

3M[™] Double Coated Tape 9191

,3M™ Double Coated Tape 9191, is a general-purpose double-coated tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a non-woven carrier and an easy to remove siliconised paper liner.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000035445 | 91915025 | $3 M^{ \ensuremath{\mathbb{N}}}$ Double Coated Tape 9191, White, 50 mm x 25 m, 0.26 mm | 36 | Roll |
| 7000062001 | 919150 | 3M [™] Double Coated Tape 9191, White, 50 mm x 25 m, 0.26 mm, Blister | 36 | Roll |

3M[™] Carpet Tape 9195

3M™ Double Coated Tape 91915 is a general-purpose double-coated tape. It features a high tack, high initial adhesion rubber pressure sensitive adhesive, a non-woven carrier and an easy to remove siliconised paper liner.

- General purpose, double sided tissue tape
- High tack, high initial adhesion
- Pressure sensitive adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000111987 | 91955025 | 3M [™] Carpet Tape 9195, Yellow, 50 mm x 25 m, 0.13 mm | 36 | Roll |





3M[™] Adhesive Transfer Tape Extended Liner 920XL

3M[™] Adhesive Transfer Tapes Extended Liner are general purpose tapes with a pressure sensitive adhesive mounted on a removable extended paper liner for easy liner starting and removal.

- Pressure sensitive adhesives ideal for bonding a variety of different materials
- Dry edge and finger lift edge liners for added user convenience
- Tack free tape roll edges for ease of use and reduced equipment maintenance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048424 | 92012 | 3M [™] Adhesive Transfer Tape Extended Liner 920XL, Transparent, 12.7 mm x 914 m, 0.025 mm | 12 | Roll |

3M[™] Low VOC Double Coated Tissue Tape 99015LVC

3M[™] Low VOC Double Coated Tissue Tape 99015LVC is a 150 µ double coated tape with a tissue carrier for dimensional stability, ease of handling during lamination and excellent die-cutting. It is recommended for automotive interior bonding, trim and attachment applications to many foam, HSE and LSE substrates.

- \bullet 150 μm double coated tissue tape, Low VOC and Low FOG acrylic adhesive.
- Designed to meet JAMA and VDA278 automotive standards.
- Up to 200°C short-term heat resistance and good shear strength.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------------|---|-----|------|
| 7100085670 | 714595 | 3M [™] Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1000 mm x 50 m, 0.15 mm | 24 | Roll |
| 7100085845 | 99015LVC1500MMX50M | 3M [™] Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1500 mm x 50 m | 1 | Roll |
| 7100085671 | 720657 | 3M [™] Low VOC Double Coated Tissue Tape 99015LVC, Transparent, 1500 mm x 200 m, 0.15 mm | 6 | Roll |

3M[™] Low VOC Scrim Reinforced Transfer Tape 98010LVC

3M[™] Low VOC Scrim Reinforced Transfer Tape 98010LVC is a 100µm acrylic adhesive transfer tape with a scrim reinforced carrier.

- 100µm adhesive transfer tape with a scrim reinforced carrier , Low VOC and Low FOG acrylic adhesive.
- Designed to meet JAMA and VDA278 automotive test methods and industry standards on volatile organic compounds.
- Up to 135°C short-term heat resistance and good shear strength.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100085854 | 980101500X50 | 3M [™] Low VOC Scrim Reinforced Transfer Tape 98010LVC, Transparent, 1500 mm x 50 m, 0.10 mm | 24 | Roll |

Focus

3M[™] Screen Printable Pressure Sensitive Adhesive SP7202

3M[™] Screen Printable Pressure Sensitive Adhesive SP7202 is a liquid that can be applied through a screen printing process, then cured with 1-2 seconds under UV light to become a pressure sensitive adhesive. It allows fine bond lines greater than 0.2mm and holes as small as approximately 1mm with less waste than die cutting. The 100% solids adhesive can be printed directly on parts. When cured it is water and chemical resistant, and can be bonded immediately or covered with a liner for shipping to a different location.

- Screen-printable liquid cures under UV light to become a pressure sensitive adhesive (PSA)
- Works with conventional screen printing and UV curing equipment
- Allows printing of narrow bond lines (> 0.2mm) and holes as small as approximately 1mm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|--------|
| 7100238539 | SP72021 | 3M [™] Screen Printable UV-Curing Pressure Sensitive Adhesive SP7202, Clear, 1 L | 6 | Bottle |

3M[™] Sheet and Screen Label Materials

3M[™] Sheet and Screen Label Materials 7908E is our 50 micron gloss white polyester facestock with 45 micron acrylic adhesive 350 on a 170 micron polycoated kraft liner with green 3M Logo printed. It's UL recognised and CSA accepted.

- Facestocks (polyester and vinyl) and adhesives offer heat tolerance, clarity, and UV resistance
- 350 high performance acrylic adhesive for high shear strength on low surface energy (LSE) substrates
- Polycoated and film liners are suitable for efficient processing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|----------|
| 7000041363 | SP4533 | 3M [™] Screenprintable Adhesive SP4533, Milky white, 3 kg | 4 | Canister |
| 7000006835 | SP7555 | 3M [™] Screenprintable Adhesive SP7555, Transparent, 1 L | 6 | Canister |





Dual Lock"

Dual Lock"

M Dual Lock"

Dual Lock"

Dual Lock"

Dual Lock

and Dual Lo

3M Dual Lot

Dual Loci

M Dual Lock

Dual Loc

201

3M[™] Dual Lock[™] Reclosable Fasteners

Looking for a reclosable fastener with super strength, ultimate ease and durable enough to last through repeated opening and closing? Find the product you need based on the substrate or external condition you're working with.













For Flexible and Bendable Attachments

3M[™] Reclosable Fastener SJ352x and SJ357x Families offer an alternative to a wide variety of reclosable attachment methods, including zips, screws, snaps, hooks and more.

For Polypropylene & Polyethylene

3M[™] Dual Lock[™] Reclosable Fastener SJ354x Series are ideal for replacing screws, nails, snaps and rivets. Designed for use with plastics (acrylic, polycarbonate and ABS), powder-coated paints and low-surface energy materials (polypropylene and polyethylene). Indoor use.

For Metals and Plastics

3M[™] Dual Lock[™] Reclosable Fastener SJ355xCF family is perfect for replacing screws, nails, snaps and rivets. It bonds to a variety of substrates including metals, powder-coated paints and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.

For Translucent Materials

3M[™] Dual Lock[™] Reclosable Fastener SJ3560 is strong, reliable and simple to use. Great for replacing screws, nails, snaps and rivets, it bonds to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.

For Powder Coated Paints

3M[™] Dual Lock[™] Reclosable Fastener SJ387x Family is also designed to replace screws, nails, snaps and rivets. It bonds to a variety of substrates including metals, powder-coated paints and plastics such as acrylics, polycarbonate and ABS. Indoor and outdoor use.

For Thin-Low-Profile Attachment

3M[™] Dual Lock[™] Reclosable Fastener SJ4570 features low-profile attachment. It bonds well to a variety of substrates including metals, power-coated paints and plastics such as acrylic, polycarbonates and ABS. Indoor and outdoor use.



Click or scan QR code

Hook & Loop

3M[™] Fastener Hook SJ3526N

3M[™] Fastener SJ3526N is our high performance PSA nylon hook with a rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use and has an engaged thickness of 4.4 mm.

- High performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Woven nylon is durable for thousands of closures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000002127 | SJ352615 | 3M [™] Fastener Hook SJ3526N, Black, 16 mm x 45.7 m, 4.4 mm | 4 | Roll |
| 700002130 | SJ352625 | 3M [™] Fastener Hook SJ3526N, Black, 25 mm x 45.7 m, 4.4 mm | 3 | Roll |
| 7000029691 | SJ3526N | 3M [™] Fastener Hook SJ3526N, Black, 51 mm x 45.7 m, 4.4 mm | 2 | Roll |
| 700002132 | SJ3526 | 3M™ Fastener Hook SJ3526N, White, 25 mm x 45.7 m, 4.4 mm | 3 | Roll |

3M[™] Loop Fastener SJ3527N

3M[™] Fastener SJ3527N is our high performance PSA nylon loop with rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use, and has an engaged thickness of 4.4 mm.



- Backed with a high performance rubber based adhesive, designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Durable for thousands of closures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000052220 | SJ352750 | 3M [™] Loop Fastener SJ3527N, Black 51 mm x 45.7 m, 4.4 mm | 2 | Roll |
| 7000002128 | SJ352716 | 3M [™] Loop Fastener SJ3527N, Black, 16 mm x 45.7 m, 4.4 mm | 4 | Roll |
| 7000002133 | 568736 | 3M [™] Loop Fastener SJ3527N, Black, 25 mm x 45.7 m, 4.4 mm | 3 | Roll |
| 7000002131 | 3527W25 | 3M [™] Loop Fastener SJ3527N, White, 25 mm x 45.7 m, 4.4 mm | 3 | Roll |

3M[™] Loop Fastener SJ3571

3M[™] Loop Fastener SJ3571 is our premium performance PSA nylon loop with acrylic tape and clear polyethylene film liner. It has 3.8 mm engaged thickness.

- High performance acrylic adhesive designed for high temperature resistance
- Durable for thousands of closures
- Quick fastening that helps reduce production time and costs

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001961 | SJ3571 | 3M [™] Loop Fastener SJ3571, Black, 25 mm x 45.7 m, 3.8 mm | 3 | Roll |
| 7000051909 | 391472 | 3M [™] Loop Fastener SJ3571, Black, 51 mm x 45.7 m, 3.8 mm | 2 | Roll |
| 7000001972 | SJ3571WT | 3M [™] Loop Fastener SJ3571, White, 25 mm x 45.7 m, 3.8 mm | 3 | Roll |

3M[™] Fastener Hook SJ3572

3M[™] Hook Fastener SJ3572 is our premium performance PSA nylon loop with acrylic tape and clear polyethylene film liner. It has a 3.8 mm engaged thickness.

- High performance acrylic adhesive designed for high temperature resistance
- Durable for thousands of closures
- Quick fastening that helps reduce production time and costs

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001962 | SJ3572BK | 3M [™] Fastener Hook SJ3572, Black, 25 mm x 45.7 m, 3.8 mm | 3 | Roll |
| 7000051903 | 715483 | 3M™ Fastener Hook SJ3572, Black, 51 mm x 45.7 m, 3.8 mm | 2 | Roll |
| 7000001973 | SJ3572WT | 3M [™] Fastener Hook SJ3572, White, 25 mm x 45.7 m, 3.8 mm | 3 | Roll |

3M[™] Hook and Loop Fastener SJ352B

3M[™] Hook and Loop fastener SJ3520 is our white, high performance PSA nylon hook and loop with a rubber adhesive and white polypropylene film liner. It provides a firm adhesive bond to a wide variety of surfaces including many low surface energy plastics and powder coats. It's designed for indoor use and has an engaged thickness of 4.4 mm.

- High performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provides a firm adhesive bond to a wide variety of surfaces
- Woven nylon is durable for thousands of closures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100123266 | SJ352BBK25ST | 3M [™] Hook and Loop Fastener SJ352B, Black, 25 mm x 1.25 m, 4.4 mm, Blister IPC | 4 | Roll |
| 7100123727 | SJ352BWT25ST | 3M [™] Hook and Loop Fastener SJ352B, White, 25 mm x 1.25 m, 4.4 mm, Blister IPC | 4 | Roll |

3M[™] Reclosable Fastener SJ352D

Use 3M[™] Reclosable Fastener SJ352D for a range of applications in a wide variety of industries. Our fastener's quick fastening feature can help reduce production time and costs. This box offers 5 m of both hook and loop systems, SJ3526N and SJ3527N.

- Backed with a high performance rubber based adhesive designed for indoor applications requiring medium temperature resistance
- Provide a firm adhesive bond to a wide variety of surfaces
- Durable for thousands of closures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000070522 | SJ352D | 3M™ Fastener SJ352D, Black, 25 mm x 5 m, 4.4 mm, Twin Pack | 4 | Each |





3M[™] Fastener Loop Flame Resistant SJ3418FR

3M[™] Flame Resistant Loop Fastener SJ3418FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. It's a nylon, woven loop reclosable fastener with 3.8 mm engaged thickness, and is plain backed for sew on applications. It mates with SJ3419FR.

- Plain backed loop fastener for sew on applications. Replaces zippers, buttons, snaps and laces
- Provides durability for thousands of closures through woven nylon design
- Resist flames and extreme heat with these rigorously tested fasteners

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000051776 | 246889 | $3 \ensuremath{M}\xspace^{\times}$ Fastener Loop Flame Resistant SJ3418FR, Black, 25 mm x 45.7 m, 3.6 mm | 12 | Roll |

3M[™] Fastener Hook Flame Resistant SJ3419FR

3M[™] Flame Resistant Hook Fastener SJ3419FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. It's a nylon, woven hook reclosable fastener with 3.8 mm engaged thickness, and is plain backed for sew on applications. It mates with SJ3418FR.

- Plain backed hook fastener for sew on applications. Replaces zippers, buttons, snaps and laces
- Provides durability for thousands of closures through woven nylon design
- Resist flames and extreme heat with these rigorously tested fasteners

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000051782 | 246891 | 3M [™] Fastener Hook Flame Resistant SJ3419FR, Black, 25 mm x 45.7 m | 12 | Roll |

3M[™] Fastener Loop Flame Resistant SJ3518FR

Fasten thousands of closures with 3M[™] Flame Resistant Fastener SJ3518FR. Our loop fastener is durable, flame resistant (meeting F.A.R. 25.853 paragraph (a)(1)(i) 60 second vertical burn test) and backed with a rubber based adhesive for bonding to a wide variety of materials.

- Backed with a flame resistant rubber based adhesive for bonding to a wider variety of materials
- Provides durability for thousands of closures
- Rigorously tested to resist flames and extreme heat

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000052222 | 559039 | 3M [™] Fastener Loop Flame Resistant SJ3518FR, Black, 25 mm x 45.7 m, 3.6 mm | 3 | Roll |





3M[™] Fastener Hook Flame Resistant SJ3519FR

3M[™] Flame Resistant Hook Fastener SJ3519FR is one part of our two-part fastener solution designed to provide great durability for thousands of closures. This nylon, woven loop reclosable fastener features a rubber based adhesive and is flame resistant meeting F.A.R. 25.853 paragraph (a)(1)(i) 60 second vertical burn test. It mates with SJ3518FR.



- Backed with a flame resistant rubber based adhesive for bonding to a wider variety of materials
- Provides durability for thousands of closures
- Rigorously tested to resist flames and extreme heat

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000052226 | 559307 | 3M [™] Fastener Hook Flame Resistant SJ3519FR, Black, 25 mm x 45.7 m, 3.6 mm | 3 | Roll |
| 7000052227 | 559177 | 3M™ Fastener Hook Flame Resistant SJ3519FR, Black, 51 mm x 45.7 m, 3.6 mm | 2 | Roll |

Dual Lock

3M[™] Dual Lock[™] Reclosable Fastener SJ3440

3M™ Dual Lock™ Reclosable Fastener SJ3440 is black, with 40 mushroom shaped stems / cm² and an engaged thickness of 4 mm. Our reclosable fastener is plain backed with no adhesive.

- Mushroom shaped stems, plain backed with no adhesive
- Type 250 mates to Type 170, 250 or 400
- Five times the tensile strength of typical hook-and-loop fasteners

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000001979 | 354025 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3440, Black, 25 mm x 45.7 m, 4.1 mm | 2 | Roll |

3M[™] Dual Lock[™] Reclosable Fastener SJ3541

3M[™] Dual Lock[™] Reclosable Fastener SJ3541 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener, making it suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 62 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.

- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 400 mates to Type 170 or 250. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100108754 | SJ354125MM | 3M [™] Dual Lock [™] Reclosable Fastener SJ3541, Black, 25 mm x 45.7 m, 5.7 mm | 2 | Roll |
| 7100108764 | SJ354150B | 3M™ Dual Lock™ Reclosable Fastener SJ3541, Black, 50 mm x 45.7m | 3 | Roll |

3M[™] Dual Lock[™] Reclosable Fastener SJ3542

3M[™] Dual Lock[™] Reclosable Fastener SJ3542 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener which makes it suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 26 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.

- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 170 mates to Type 250, 400 or 170. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100108756 | SJ3542BK25 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3542, Black, 25 mm x 45.7 m, 5.7 mm | 2 | Roll |









3M[™] Dual Lock[™] Reclosable Fastener SJ3540

3M[™] Dual Lock[™] Reclosable Fastener SJ3540 has a rubber based adhesive on the back of a black, polypropylene reclosable fastener. It's suitable for bonding many plastics, powder coated paints and other low surface energy materials. Our reclosable fastener has 40 mushroom shaped stems / cm² with a 5.8 mm engaged thickness.



- Black fastener with mushroom shaped stems, backed with a rubber based pressure sensitive adhesive
- Type 250 mates to Type 170, 250 or 400. Closes with an audible snap
- Designed to bond to many plastics, powder coated paints and other low surface energy materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100123339 | SJ354B25ST | 3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 25 mm x 2.5 m, IPC | 4 | Roll |
| 7100108749 | SJ3450BLK25MM | 3M™ Dual Lock™ Reclosable Fastener SJ3540, Black, 25 mm x 45.7 m, 5.7 mm | 2 | Roll |
| 7000070523 | SJ354D | 3M [™] Dual Lock [™] Reclosable Fastener Twin Pack SJ354D, Black, 25 mm x 5 m, 5.7 mm, PN34516 | 4 | Each |

Focus

3M[™] Dual Lock[™] Reclosable Fasteners SJ3550CF

3M[™] Dual Lock[™] Reclosable Fastener SJ3550CF is the convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution which bonds to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS. This fastener gives the adhesive a black appearance.



- Black, interlocking mushroom-shaped heads (250 stem density per square inch) provide strong, reliable and durable fastening that can be opened and closed multiple times
- Mates with Type 170, Type 250 or Type 400 stem densities to provide different strength combinations
 Clear, acrylic, tape bonds well to a variety of substrates including metals, glass and plastics such as


| acrylics, | polycarbonate and | ABS |
|-----------|-------------------|-----|
|-----------|-------------------|-----|

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100279569 | 3550CF12 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3550CF, Black, 12.5 mm x 45.7 m, Type 250 | 12 | Roll |
| 7100279337 | 3550CF19 | 3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 19 mm x 45.7 m, Type 250 | 2 | Roll |
| 7100279420 | 3550CF25 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3550CF, Black, 25 mm x 45.7 m, Type 250 | 2 | Roll |
| 7100279570 | 3550CF50 | 3M™ Dual Lock™ Reclosable Fastener SJ3550CF, Black, 50 mm x 45.7 m, Type 250 | 1 | Roll |

Focus

3M[™] Dual Lock[™] Reclosable Fastener SJ3551CF

3M[™] Dual Lock[™] Reclosable Fastener SJ3551CF is the convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution which bonds to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS. This fastener gives the adhesive a black appearance.



- Mates with Type 170 and Type 250 stem densities to provide different strength combinations
- Clear, acrylic, tape bonds well to a variety of substrates including metals, glass and plastics such as acrylics, polycarbonate and ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100279571 | 3551CF19 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3551CF, Black, 19 mm x 45.7 m, Type 400 | 2 | Roll |
| 7100279572 | 3551CF25 | 3M™ Dual Lock™ Reclosable Fastener SJ3551CF, Black, 25 mm x 45.7 m, Type 400 | 2 | Roll |
| 7100279603 | 3551CF50 | 3M™ Dual Lock™ Reclosable Fastener SJ3551CF, Black, 50 mm x 45.7 m, Type 400 | 3 | Roll |

Focus

3M[™] Dual Lock[™] Reclosable Fastener SJ3552CF

3M[™] Dual Lock[™] Reclosable Fastener SJ3552CF is a convenient alternative to traditional fastening methods, such as screws, nuts or bolts. It is designed to deliver a durable, reclosable fastening solution (which can be opened and closed multiple times) which bonds to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS.



V

- Black, interlocking mushroom-shaped heads (170 stem density per square inch) provide strong, reliable and durable fastening that can be opened and closed multiple times
- Mates with Type 250 and Type 400 stem densities to provide different strength combinations
- Clear, acrylic, firm foam tape bonds well to a variety of substrates including metals and plastics such as acrylics, polycarbonate and ABS

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100279613 | 3552CF19 | 3M™ Dual Lock™ Reclosable Fastener SJ3552CF, Black, 19 mm x 45.7 m, Type 170 | 8 | Roll |
| 7100279614 | 3552CF25 | 3M™ Dual Lock™ Reclosable Fastener SJ3552CF, Black, 25 mm x 45.7 m, Type 170 | 2 | Roll |

3M[™] Dual Lock[™] Reclosable Fastener SJ3560

3M[™] Dual Lock[™] Reclosable Fastener SJ3560 has a clear acrylic adhesive on the back of a clear polypropylene reclosable fastener with 40 stems / cm² and 5.8 mm engaged thickness. Our reclosable fastener has a closure life of 1000 times before losing 50% of its original tensile strength.



- Designed to give a translucent appearance (glass, acryl glass (PMMA), polycarbonate)
- Snap-in-place installation replaces screws, nails, snaps and rivets
- Five times the tensile strength of typical hook-and-loop fasteners

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000070525 | SJ356D | 3M™ Dual Lock™ Reclosable Fastener SJ356D, Transparent, 25mm x 5m, 5.7mm, Mini Pack | 4 | Each |
| 7100123340 | SJ356B25ST | 3M [™] Dual Lock [™] Reclosable Fastener SJ3560, 25 mm x 2.5 m, IPC, Twin Pack | 4 | Roll |
| 7000001960 | SJ356025 | 3M™ Dual Lock™ Reclosable Fastener SJ3560, Clear, 25 mm x 45.7 m, Type 250 | 2 | Roll |
| 7000051892 | SJ356012 | 3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 12.7 mm x 45.7 m, 5.7 mm, Twin Pack | 4 | Roll |
| 7000051893 | 667643 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3560, Transparent, 19 mm x 45.7 m, 5.7 mm | 2 | Roll |
| 7100017793 | DLSJ3560 | 3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 25 mm x 1.25 m, 5.7 mm | 20 | Roll |
| 7000051894 | SJ356050 | 3M™ Dual Lock™ Reclosable Fastener SJ3560, Transparent, 51 mm x 45.7 m, 5.7 mm | 1 | Roll |

3M[™] Dual Lock[™] Reclosable Fastener TB3560

3M[™] Dual Lock[™] Reclosable Fastener SJ3560 has a clear acrylic adhesive on the back of a clear polypropylene reclosable fastener with 40 stems / cm² and 5.8 mm engaged thickness. Our reclosable fastener has a closure life of 1000 times before losing 50% of its original tensile strength.



- Clear fastener with mushroom shaped stems backed with a clear, acrylic pressure sensitive adhesive
- Type 250 mates to Type 170, 250 or 400
- Five times the tensile strength of typical hook-and-loop fasteners

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-----|
| 7100020027 | 3560TB25 | 3M™ Dual Lock™ Reclosable Fastener TB3560, Clear, 25 mm x 3 m, 5.7 mm | 8 | Bag |

3M[™] Dual Lock[™] Reclosable Fastener SJ3870

3M[™] Dual Lock[™] Reclosable Fastener SJ3870 has a modified acrylic adhesive on the back of a black polypropylene reclosable fastener. Our product can be used both indoors and outside in a variety of applications; and has a slim 6.1 mm engaged thickness and long service life.



- Snap-in-place installation replaces screws, nails, snaps and rivets
- Five times the tensile strength of typical hook-and-loop fasteners
- \bullet Durable up to 1,000 openings and closings before losing 50 % of original tensile strength

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100108725 | SJ387012 | 3M™ Dual Lock™ Reclosable Fastener SJ387B, Black, 12.5 mm x 41 m, 6.1 mm | 12 | Roll |
| 7100123347 | SJ387B25ST | 3M [™] Dual Lock [™] Reclosable Fastener SJ387B, Black, 25 mm x 2.5 m, 6.1 mm, Blister | 4 | Roll |
| 7100214419 | SJ387015.9 | 3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 15.9 mm x 41 m, 6.1 mm | 2 | Roll |
| 7100108753 | SJ3870/19 | 3M™ Dual Lock™ Reclosable Fastener SJ3870, Black, 19 mm x 41 m, 6.1 mm | 8 | Roll |
| 7100108755 | 387025 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3870, Black, 25 mm x 41 m, 6.1 mm, 40 pieces/ cm² | 2 | Roll |
| 7100108752 | SJ387050 | 3M [™] Dual Lock [™] Reclosable Fastener SJ3870, Black, 50 mm x 41 m, 6.1 mm, Type 250 BULK | 9 | Roll |

3M[™] Dual Lock[™] Reclosable Fastener Low Profile SJ4570

3M[™] Dual Lock[™] Low Profile Reclosable Fastener SJ4570 is a modified acrylic adhesive on the back of a clear polypropylene reclosable fastener. Its modified acrylic adhesive enables you to bond medium to low surface energy materials such as metals, glass, many plastics and powder coated paints. With its 1.7 mm engaged thickness, our fastener is half the thickness of standard Dual Lock[™] reclosable fasteners.



- Half the thickness of standard Dual Lock™ Reclosable Fasteners for low profile attachments
- Opens and closes up to 100 times before losing 50 % of original tensile strength
- Translucent fastener and adhesive is ideal for joining transparent materials

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000002105 | SJ4570 | 3М | 2 | Roll |
| 7000070534 | SJ457D | 3M [™] Dual Lock [™] Reclosable Fastener Low Profile SJ457D, Transparent, 25 mm x 10 m, 1.7 mm, Mini Pack | 4 | Each |
| 7000052144 | 4570T15 | 3M™ Dual Lock™ Reclosable Fastener Low Profile SJ4570, Transparent, 16 mm x 45.7 m, 1.7 mm | 1 | Roll |

3M[™] Dual Lock[™] Low Profile Reclosable Fastener TB4570

3M[™] Dual Lock[™] Low Profile Reclosable Fastener TB4570 is our modified acrylic adhesive on the back of a clear polypropylene reclosable fastener. Its modified acrylic adhesive enables you to bond medium to low surface energy materials such as metals, glass, many plastics and powder coated paints. With its 1.7 mm engaged thickness it's half the thickness of standard Dual Lock[™] reclosable fasteners.

- Clear, low profile fastener with mushroom shaped stems backed with a clear, low surface energy acrylic pressure sensitive adhesive
- Great for small jobs, prototyping and design evaluation
- Opens and closes 100 times

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-----|
| 7000124799 | 4570TB25 | 3M [™] Dual Lock [™] Reclosable Fastener Low Profile TB4570, Transparent, 25 mm x 3 m, 1.7 mm | 8 | Bag |

3M[™] Dual Lock[™] Reclosable Fastener SJ4580

3M[™] Dual Lock[™] Low Profile Reclosable Fastener SJ4580 is our clear acrylic adhesive on the back of a clear polypropylene reclosable fastener. It has a low profile 2.8 mm engaged thickness.

- Clear, low profile with mushroom shaped stems backed with clear, low surface energy acrylic pressure sensitive adhesive
- Low profile, polyolefin fastener is half the thickness of standard Dual Lock™ reclosable fasteners and is self-mating
- Opens and closes 100 times

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000052205 | SJ4580100 | 3M™ Dual Lock™ Reclosable Fastener SJ4580, Transparent 102 mm x 45.7 m, 2.8 mm | 1 | Roll |



3M[™] Engineered Industrial Tapes

When extreme challenges threaten your product's results, the high-performance technology behind 3M[™] Engineered Industrial Tapes can help you manage environmental variables. With tape collections created to take on your specific challenges, we make it easy to find the solutions you need – no matter the environment.



Withstand Temperatures

Extreme temperatures can cause damage or rework. Get powerful hot protection against and cold extremes.



Resist Chemicals

Aggressive chemicals can ruin parts. Keep surfaces safe with 3M solutions.



Secure Anything

Heavy or critical parts can move and become damaged during shipment. Discover how to get an unbeatable hold.



Take on Weather

Moisture, dust and UV rays reduce product life. 3M tapes provide a defensive barrier to battle the elements.



Regulate Friction

Irregular machine or part movement can cause factory slowdowns. Find innovative products to help improve efficiency.



Reduce Noise

Deliver the quieter product experience your customer's desire.



3M[™] Masking Tapes - Find the tape that you need!

We offer a full range of industrial masking tapes with unmatched dependability. Whether you need a tape that can withstand high temperatures or remove cleanly in UV conditions, you can trust 3M to help you get the job done right.











General Purpose Masking

Ideal for non-critical paint masking, but also bundling, sealing, attaching, and other applications

- 3M[™] Value Masking Tape 101E
- 3M[™] General Purpose Masking Tape 201E

Industrial Painting

Designed for industrial paint masking applications. Its temperature performance allows air-drying and oven-curing of paint.

- 3M[™] Performance Industrial Masking Tape 301E
- 3M[™] High Performance Industrial Masking Tape 401E
- Scotch® Performance Masking Tape 244
- Scotch® Aqua Washi Tape 2899

Fine Line Masking

Conformable tapes used to achieve sharp paint lines and colour separation for curves and straight lines.

- High Temperature Fine Line Tape 4737TL
- Scotch® High Temperature Fine Line Tape 4735
- Scotch® Fine Line Tape 218
- Scotch® Masking Tape 2800

High Temperature Masking

Designed for critical paint masking applications in the automotive, specialty vehicle, and industrial markets where excellent holding and high-temperature performance are required.

3M[™] Specialty High Temperature Industrial Masking Tape 501E

Flatback Masking

These product group offers good adhesion in a wide temperature range.Durable backing paper provides high strength for splicing and metal protection applications. The tape has high tack, allowing for quick adhesion. It can adhere to a wide variety of paper substrates and can be cleanly removed from metals when used for protection.

- 3M[™] Flatback Tape 2517
- 3M[™] Performance Flatback Tape 2525



3M[™] Duct Tapes - Find the tape you need!

Duct tape products make all kinds of projects-from temporary fixing to indoor and outdoor repairs-both quick and effective.

They're a universal solution for a variety of jobs and quick repairs. 3M offers a full line of duct tapes to fit any job, from simple household repairs to professional MRO applications. They're conformable, hold securely and tear easily off the roll. Some are also weather resistant to withstand the harmful effects of sunlight and moisture.









All Purpose Duct Tape

For general maintenance, bunding, wrapping, attaching, sealing and protecting. Conformable with an instant bond. Good tensile strength for light-duty applications.

- 3M[™] All Purpose Duct Tape DT8
- 3M[™] Vinyl Duct Tape 3903i
- 3M™ Value Duct Tape 1900
- 3M[™] General Purpose Duct Tape 2903

Heavy Duty Duct Tape

Designed for use in heavy duty industrial and MRO applications. Versatility with holding power. For irregular, hard-to-bond surfaces.

- 3M[™] Heavy Duty Duct Tape DT11
- 3M™ Extra Heavy Duty Duct Tape 389
- 3M[™] Heavy Duct Tape 2904
- 3M™ Heavy Duct Tape 3939

Super Duty Duct Tape

Designed to provide maximum-strength and is a long-lasting solution for high stress applications. Super thick for super tough jobs. Ultra-thick, water-resistant backing resists wear and abrasion.

• 3M[™] Super Duty Duct Tape DT17

Specialty Duct Tape

Designed for use on most opaque surfaces with clean removal for up to 6 months in many outdoor and indoor applications. High instant adhesion. Superior strength for the most demanding applications.

• 3M[™] Performance Plus Duct Tape 8979





Vinyl Tapes



3M[™] Durable Floor Marking Tape 971

3M[™] Durable Floor Marking Tape 971 is comprised of a heavy-duty vinyl backing with a rubber adhesive. The tough, durable backing resists pallet drag and high forklift traffic and is easy to clean. This tape is designed for reliable long-term floor marking yet can still come up clean, in one piece.

- DURABLE CONSTRUCTION: Heavy-duty vinyl backing is ideal for high-traffic areas
- CLEAN REMOVAL: Unique rubber adhesive provides a strong bond and residue-free removal
- TAPE YOUR WAY: Linerless construction makes for easy application by hand or using the 3M[™] Lane Marking Applicator M1



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100253141 | 971BL50 | 3M™ Durable Floor Marking Tape 971, Blue, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100253517 | 971BL75 | 3M™ Durable Floor Marking Tape 971, Blue, 76.2 mm x 32.9 m, 0.43 mm | 4 | Roll |
| 7100254036 | 971B101IW | 3M [™] Durable Floor Marking Tape 971, Blue, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |
| 7100254034 | 971GN50 | 3M [™] Durable Floor Marking Tape 971, Green, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100254037 | 971GN75 | 3M™ Durable Floor Marking Tape 971, Green, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 4 | Roll |
| 7100254033 | 971VE100N | 3M [™] Durable Floor Marking Tape 971, Green, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |
| 7100260621 | 971OR50 | 3M™ Durable Floor Marking Tape 971, Orange, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100260043 | 971OR75 | 3M™ Durable Floor Marking Tape 971, Orange, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 4 | Roll |
| 7100260625 | 971OR100 | 3M™ Durable Floor Marking Tape 971, Orange, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |
| 7100259699 | 971RD50 | 3M™ Durable Floor Marking Tape 971, Red, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100260624 | 971RD75 | 3M™ Durable Floor Marking Tape 971, Red, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 4 | Roll |
| 7100259700 | 971R101IW | 3M™ Durable Floor Marking Tape 971, Red, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |
| 7100251995 | 971WT50 | 3M [™] Durable Floor Marking Tape 971, White, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100251992 | 971WT75 | 3M [™] Durable Floor Marking Tape 971, White, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 4 | Roll |
| 7100251993 | 971W101IW | 3M [™] Durable Floor Marking Tape 971, White, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |
| 7100249185 | 971YL50 | 3M [™] Durable Floor Marking Tape 971, Yellow, 50.8 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 6 | Roll |
| 7100253513 | 971YL75 | 3M [™] Durable Floor Marking Tape 971, Yellow, 76.2 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 4 | Roll |
| 7100253142 | 971Y101IW | 3M [™] Durable Floor Marking Tape 971, Yellow, 101.6 mm x 32.9 m, 0.43 mm, Individually Wrapped Conveniently Packaged | 3 | Roll |

3M[™] Durable Floor Marking Tape 971L

3M[™] Ultra Durable Floor Marking Tape 971L is comprised of a Vinyl backing with a rubber adhesive and paper liner. The tough, thick vinyl backing resists pallet drag and high forklift traffic. This tape is designed for long-term floor marking, yet can still come up clean, in one piece.



- Durable Vinyl backing with a rubber adhesive designed for heavy traffic areas
- Backing maintains vivid color even when exposed to heavy abrasion from pallets or heavy equipment like forklifts
- Unique adhesive provides a strong bond yet promotes one-piece clean removal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100259598 | 971BL610 | 3M™ Durable Floor Marking Tape 971L, Blue, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |
| 7100259749 | 971GN610 | 3M [™] Durable Floor Marking Tape 971L, Green, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |
| 7100260619 | 971OR610 | 3M [™] Durable Floor Marking Tape 971L, Orange, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |
| 7100259750 | 971RD610 | 3M [™] Durable Floor Marking Tape 971L, Red, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |
| 7100248651 | 971WT610 | 3M [™] Durable Floor Marking Tape 971L, White, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |
| 7100248469 | 971YL610 | 3M [™] Durable Floor Marking Tape 971L, Yellow, 609.6 mm x 32.9 m, 0.43 mm | 1 | Roll |

3M™ Vinyl Tape 471

3M[™] Vinyl Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.

- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100260578 | 471BK25 | 3M™ Vinyl Tape 471, Black, 25 mm x 33 m, 0.13 mm, Individually Wrapped | 36 | Roll |
| 7100044640 | 471136 | 3M [™] Vinyl Tape 471, Black, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7000048401 | 47150BK | 3M [™] Vinyl Tape 471, Black, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260161 | 471BK50IW | 3M [™] Vinyl Tape 471, Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000048524 | 584602 | 3M™ Vinyl Tape 471, Blue, 6 mm x 33 m, 0.14 mm, Wrapped | 144 | Roll |
| 7100049359 | 85611 | 3M [™] Vinyl Tape 471, Blue, 9 mm x 33 m, 0.14 mm | 1 | Roll |
| 7000048710 | 4713.8 | 3M [™] Vinyl Tape 471, Blue, 9 mm x 33 m, 0.14 mm | 96 | Roll |
| 7100044170 | 471BL12 | 3M [™] Vinyl Tape 471, Blue, 12 mm x 33 m, 0.14 mm, PN36408 | 12 | Roll |
| 7000047462 | 47119BL | 3M [™] Vinyl Tape 471, Blue, 19 mm x 33 m, 0.14 mm | 48 | Roll |
| 7000047463 | 47125BL | 3M [™] Vinyl Tape 471, Blue, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7000028851 | 47150BL | 3M [™] Vinyl Tape 471, Blue, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100044656 | 471IW-BL50-D | 3M™ Vinyl Tape 471, Blue, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260160 | 471B50IW | $3 \ensuremath{M}^{\ensuremath{``}}$ Vinyl Tape 471, Blue, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100260472 | 471GR25 | 3M [™] Vinyl Tape 471, Green, 25 mm x 33 m, 0.13 mm | 36 | Roll |
| 7000028855 | 47150GR | 3M [™] Vinyl Tape 471, Green, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260162 | 471GR50IW | 3M™ Vinyl Tape 471, Green, 50mm x 33m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100071665 | 471GR1219 | 3M [™] Vinyl Tape 471, Green, 1219 mm x 33 m | 1 | Roll |

3M™ Vinyl Tape 471

3M[™] Vinyl Tape 471 is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.



- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000028854 | 471050 | 3M™ Vinyl Tape 471, Orange, 51 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260301 | 471Y12IW | 3M™ Vinyl Tape 471, Red, 12.7 mm x 33 m, 0.13 mm, Individually Wrapped | 72 | Roll |
| 7100260577 | 471R19 | 3M [™] Vinyl Tape 471, Red, 19 mm x 33 m, 0.13 mm | 48 | Roll |
| 7000047452 | 47119R | 3M™ Vinyl Tape 471, Red, 19 mm x 33 m, 0.14 mm, Bulk | 48 | Roll |
| 7100260579 | 471R25 | 3M [™] Vinyl Tape 471, Red, 25 mm x 33 m, 0.13 mm | 36 | Roll |
| 7000047453 | 47125RE | 3M™ Vinyl Tape 471, Red, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7000028850 | 47150RE | 3M™ Vinyl Tape 471, Red, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260125 | 471R50IW | $3 \ensuremath{M}\xspace^{\times}$ Vinyl Tape 471, Red, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100260855 | 471W19 | 3M™ Vinyl Tape 471, White, 19 mm x 33 m, 0.13 mm | 48 | Roll |
| 7000047473 | 47119WT | 3M™ Vinyl Tape 471, White, 19 mm x 33 m, 0.14 mm | 48 | Roll |
| 7100260696 | 471W25 | 3M™ Vinyl Tape 471, White, 25 mm x 33 m, 0.13 mm | 36 | Roll |
| 7000047474 | 47125WT | 3M [™] Vinyl Tape 471, White, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7100260697 | 471W38 | 3M™ Vinyl Tape 471, White, 38 mm x 33 m, 0.13 mm | 24 | Roll |
| 7000047475 | 47138WT | 3M [™] Vinyl Tape 471, White, 38 mm x 33 m, 0.14 mm | 24 | Roll |
| 7000028853 | 47150WT | 3M™ Vinyl Tape 471, White, 50 mm x 33 m, 0.14 mm, Bulk | 24 | Roll |
| 7100260598 | 471W50IW | 3M [™] Vinyl Tape 471, White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100044646 | 687000 | 3M™ Vinyl Tape 471, Yellow, 12 mm x 33 m, 0.14 mm | 72 | Roll |
| 7100260582 | 471Y12IW | 3M™ Vinyl Tape 471, Yellow, 12.7 mm x 33 m, 0.13 mm, Individually Wrapped | 72 | Roll |
| 7100260585 | 471Y19 | 3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.13 mm | 48 | Roll |
| 7000047467 | 47119YE | 3M™ Vinyl Tape 471, Yellow, 19 mm x 33 m, 0.14 mm, Bulk | 1 | Roll |
| 7100260586 | 471Y25 | 3M™ Vinyl Tape 471, Yellow, 25 mm x 33 m, 0.13 mm | 36 | Roll |
| 7000047468 | 47125YE | 3M™ Vinyl Tape 471, Yellow, 25 mm x 33 m, 0.14 mm, Bulk | 36 | Roll |
| 7100260587 | 471Y38 | 3M [™] Vinyl Tape 471, Yellow, 38 mm x 33 m, 0.13 mm | 24 | Roll |
| 7000047469 | 47138YE | 3M™ Vinyl Tape 471, Yellow, 38 mm x 33 m, 0.14 mm | 24 | Roll |
| 7000028852 | 47150YE | 3M [™] Vinyl Tape 471, Yellow, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7100260283 | 471Y50IW | 3M [™] Vinyl Tape 471, Yellow, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100260588 | 471Y76 | 3M™ Vinyl Tape 471, Yellow, 76 mm x 33 m, 0.13 mm | 60 | Roll |

3M[™] Vinyl Tape 471 Transparent

3M[™] Lane and Safety Marking Tape 471is commonly used for marking hazards and aisles, colour-coding, paint masking, decorative trim, splicing, and more. Made from vinyl backing with rubber adhesive, our versatile tape resists scrapes, wear, and weathering for long lasting use.



- Maintains its colour when exposed to abrasion, wear and many solvents
- Unique stretch properties enable tape to remain stretched to conform to uneven surfaces without lifting and retracting
- Ideal for use on curved and irregular surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100044331 | 471236 | 3M™ Vinyl Tape 471, Transparent, 50 mm x 33 m, 0.14 mm, Wrapped | 24 | Roll |

3M[™] Safety Stripe Tape 5702

3M[™] Safety Stripe Tape 5702 is ideal for marking lanes, hazardous areas, protruding equipment, and low hanging objects in factories, warehouses, and hospitals. We use vivid, high visibility yellow and black diagonal stripes that lock into the vinyl to alert people about hazardous conditions.

- Applies instantly and is ready to use immediately
- Vivid yellow and black stripes are locked into the vinyl for permanent high visibility
- Stretches and conforms to curved surfaces and around corners for a tight fit

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000017005 | 57025033 | 3M™ Safety Stripe Tape 5702, Black/Yellow, 50 mm x 33 m, 0.14 mm | 24 | Roll |
| 7000080483 | 570250 | 3M™ Safety Stripe Tape 5702, Yellow/Black, 50 mm x 33 m, 0.14 mm | 3 | Roll |
| 7100260282 | 5702BY50IW | 3M™ Safety Stripe Tape 5702, Yellow/Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |

3M[™] General Purpose Vinyl Tape 764

3M[™] General Purpose Vinyl Tape 764 is used for all non-critical applications, including colour coding, bundling and safety marking. Our non-corrosive, flexible vinyl tape is ideal for protecting parts, equipment and products from abrasions.



- Use for taping in all non-critical applications
- Protects parts, equipment and products from abrasions
- Bundle items, bundle and temporarily mark parts, machines, plus much more

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048917 | 764IBLAC | 3M™ General Purpose Vinyl Tape 764, Black, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260600 | 764IBK50IW | 3M [™] General Purpose Vinyl Tape 764, Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000048921 | 764IBLUE | 3M™ General Purpose Vinyl Tape 764, Blue, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260288 | 764IBL50IW | 3M™ General Purpose Vinyl Tape 764, Blue, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000144708 | 764IGREE | 3M™ General Purpose Vinyl Tape 764, Green, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260280 | 764IG50IW | 3M [™] General Purpose Vinyl Tape 764, Green, 50 mm x 33 m, 0.13 mm, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000048918 | 764IGREY | 3M™ General Purpose Vinyl Tape 764, Grey, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7000048923 | 532872 | 3M™ General Purpose Vinyl Tape 764, Orange, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260281 | 76410501W | 3M [™] General Purpose Vinyl Tape 764, Orange, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000048924 | 764IRED | 3M™ General Purpose Vinyl Tape 764, Red, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260287 | 764IR50IW | 3M [™] General Purpose Vinyl Tape 764, Red, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000144707 | 764IWHIT | 3M™ General Purpose Vinyl Tape 764, White, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260286 | 764IW50IW | 3M [™] General Purpose Vinyl Tape 764, White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000144706 | 764IYELL | 3M™ General Purpose Vinyl Tape 764, Yellow, 50 mm x 33 m, 0.13 mm | 24 | Roll |
| 7100260285 | 764IYL50IW | 3M [™] General Purpose Vinyl Tape 764, Yellow, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7000048913 | 76414936 | 3M™ General Purpose Vinyl Tape 764, Yellow, 1245 mm x 33 m, 0.13 mm | 3 | Roll |

3M[™] Hazard Warning Tape 766

3M[™] Hazard Warning Tape 766 is a black and yellow striped vinyl tape. Our tape is used for marking hazardous areas, protruding equipment, or preventing accidents in factories, warehouses and hospitals.



- \bullet Use for taping in all non-critical applications
- Conformable backing makes vinyl tape ideal for use on curved and irregular surfaces
- Rubber adhesive provides good instant adhesion on many surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100260599 | 766IYB50IW | 3M [™] Hazard Warning Tape 766, Yellow/Black, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100015263 | 76650 | 3M™ Hazard Warning Tape 766i, Yellow/Black, 50 mm x 33 m, Bulk | 24 | Roll |

3M[™] Hazard Warning Tape 767

3M[™] Hazard Warning Tape 767 is a red and white striped vinyl tape. Our tape is used for marking hazardous areas, protruding equipment, or preventing accidents in factories, warehouses and hospitals.



- Use for taping in all non-critical applications
- Conformable backing makes vinyl tape ideal for use on curved and irregular surfaces
- Rubber adhesive provides good instant adhesion on many surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100260284 | 767IRW50IW | 3M [™] Hazard Warning Tape 767, Red/White, 50 mm x 33 m, Individually Wrapped Conveniently Packaged | 12 | Roll |
| 7100015266 | 767150 | 3M™ Hazard Warning Tape 767i, Red/White, 50 mm x 33 m | 24 | Roll |

3M[™] Vinyl Tape 472

Our 3M[™] Vinyl Tape 472 provides both abrasion resistance and conformability to help solve unique bonding, patching, sealing and sand blast applications that everyday vinyl tapes just can't handle. Coated with an aggressive rubber adhesive, this black vinyl tape is a heavy duty, abrasion resistant solution to a variety of difficult, long-term and outdoor applications.

- Thick backing provides heavy duty protection and increased abrasion resistance
- Aggressive rubber adhesive bonds to a variety of surfaces for long-term use, even in outdoor applications
- Protect materials against temperatures up to 107°C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000048404 | 47250 | 3M™ Vinyl Tape 472, Black, 51 mm x 33 m, 0.26 mm | 24 | Roll |

3M™ Vinyl Tape 471+

3M[™] Vinyl Tape 471+ is for accurate masking alignment with simple or complex patterns. Our tape provides clean removal without adhesive residue, even after a 30 minute bake cycle at 121 °C. It resists lifting from compound surfaces, contours, depressions and angles for precision paint results.

- Provides clean removal without adhesive residue after a 30 minute bake cycle at 121 °C. Even no ghosting effect
- Flexible and conformable tape creates fine paint lines for striping, colour separation and complex designs
- Semi-translucent backing allows for accurate alignment with simple and complex patterns

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100055258 | 694115 | 3M™ Vinyl Tape 471+, Indigo, 3 mm x 32 m, 0.14 mm, PN6404 | 12 | Roll |
| 7100055835 | 3M06405 | 3M [™] Vinyl Tape 471+, Indigo, 6 mm x 32 m, 0.14 mm, PN6405 | 144 | Roll |
| 7100057037 | 471 | 3M [™] Vinyl Tape 471+, Indigo, 9 mm x 32 m, 0.14 mm, PN2510 | 12 | Roll |
| 7100056217 | 6408 | 3M [™] Vinyl Tape 471+, Indigo, 12 mm x 32 m, 0.14 mm, PN6408 | 12 | Roll |
| 7100055259 | 471+- | 3M [™] Vinyl Tape 471+, Indigo, 19 mm x 32 m, 0.14 mm, PN6409 | 12 | Roll |





3M[™] Electroplating Tape 470

For tape applications requiring resistance to most chemicals used in electroplating and anodizing processes, use our 3M[™] Electroplating Tape 470. This tan, conformable tape features an abrasion resistant backing ideal for use with plating chemicals, anodizing chemicals, milling, etching and peening operations.



- Excellent resistance to most chemicals used in typical electroplating and anodizing operations
- Resists most common solvents and works at temperatures up to 250°F/121°C
- Abrasion, moisture and wear resistant to withstand rugged working conditions

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001178 | 47025Y | 3M [™] Electroplating Tape 470, Tan, 25 mm x 33 m, 0.18 mm | 36 | Roll |
| 7000028889 | 47051Y | 3M [™] Electroplating Tape 470, Tan, 51 mm x 33 m, 0.18 mm | 24 | Roll |
| 7010292805 | 4701219 | 3M [™] Electroplating Tape 470, Tan, 1219 mm x 33 m | 1 | Roll |

Foil Tapes

3M[™] Aluminum Foil Tape 425

3M[™] Aluminum Foil Tape 425 is for numerous applications across a broad range of industries. Our tape is comprised of a dead soft aluminium foil backing and coated with a highly engineered pressure sensitive acrylic adhesive.

- Thermally conductive tape helps dissipate heat and improves heating and cooling efficiency to protect temperature sensitive materials
- Resistant to chemicals to protect surfaces during de-paint process and other chemical masking operations
- Highly engineered acrylic adhesive provides long term durability, but removes cleanly after harsh masking applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100053636 | 42519 | 3M™ Aluminium Foil Tape 425, Silver, 19 mm x 55 m, 0.12 mm | 48 | Roll |
| 7100059421 | 4252555 | 3M [™] Aluminium Foil Tape 425, Silver, 25 mm x 55 m, 0.12 mm | 36 | Roll |
| 7100053595 | 4253855 | 3M [™] Aluminium Foil Tape 425, Silver, 38 mm x 55 m, 0.12 mm | 24 | Roll |
| 7100053813 | 4255055 | 3M [™] Aluminium Foil Tape 425, Silver, 50 mm x 55 m, 0.12 mm | 24 | Roll |
| 7100053597 | 647998 | 3M [™] Aluminium Foil Tape 425, Silver, 75 mm x 55 m, 0.12 mm | 12 | Roll |
| 7100053598 | 694298 | 3M [™] Aluminium Foil Tape 425, Silver, 102 mm x 55 m, 0.12 mm | 12 | Roll |
| 7100053924 | 425150 | 3M [™] Aluminium Foil Tape 425, Silver, 150 mm x 55 m, 0.12 mm | 2 | Roll |
| 7100053638 | 4251000 | 3M™ Aluminium Foil Tape 425, Silver, 1000 mm x 55 m, 0.12 mm | 1 | Roll |

3M[™] Aluminium Foil Tape 431

3M[™] Aluminum Foil Tape 431 is for numerous applications across a broad range of industries. Our tape is comprised of a dead soft aluminium foil backing and coated with a highly engineered pressure sensitive acrylic adhesive.



- Conformable tape resists flames, moisture, weather, UV degradation, and many chemicals
- Thermally conductive tape reflects and dissipates radiant heat to protect plastic surfaces
- Light reflective tape enhances lighting efficiency

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100039678 | 686387 | 3M™ Aluminium Foil Tape 431, Silver, 12 mm x 55 m, 0.09 mm | 72 | Roll |
| 7100230552 | 686528 | 3M™ Aluminium Foil Tape 431, Silver, 19 mm x 55 m, 0.08 mm | 64 | Roll |
| 7100230550 | 686565 | 3M [™] Aluminium Foil Tape 431, Silver, 25 mm x 55 m, 0.08 mm | 48 | Roll |
| 7100040976 | 4315055 | 3M [™] Aluminium Foil Tape 431, Silver, 50 mm x 55 m, 0.09 mm | 24 | Roll |



3M™ Aluminium Foil Tape 1436F

3M[™] Aluminum Foil Tape 1436F is our high quality Soft aluminium foil tape for internal and external ducting work. It offers an aggressive adhesive for ease of application.

- Foil backing provides an excellent reflective surface for both heat and light
- Bonds to various surfaces with an aggressive rubber adhesive
- Low water vapour transmission rate offers excellent sealing and patching performance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000062000 | 143650 | 3M™ Aluminium Foil Tape 1436, Silver, 50 mm x 50 m | 12 | Roll |

3M[™] Aluminium Foil Tape 1436

3M[™] Aluminum Foil Tape 1436 is our high quality aluminium foil tape for internal and external ducting work. It offers an aggressive adhesive for ease of application.

- Foil backing provides an excellent reflective surface for both heat and light
- Bonds to various surfaces with an aggressive rubber adhesive
- Low water vapour transmission rate offers excellent sealing and patching performance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000111971 | 143650 | 3M [™] Aluminium Foil Tape 1436, Silver, 50 mm x 50 m | 16 | Roll |
| 7000111993 | 143675 | 3M™ Aluminium Foil Tape 1436, Silver, 75 mm x 50 m | 12 | Roll |
| 7000096162 | 262658X | 3M™ Aluminium Foil Tape 1436, Silver, 100 mm x 50 m | 8 | Roll |
| 7000111549 | 14361000 | 3M™ Aluminium Foil Tape 1436, Silver, 1000 mm x 50 m | 1 | Roll |

3M[™] Lead Foil Tape 420

Our 3M[™] Lead Foil Tape 420 is an electrically and thermally conductive tape. This highly conformable tape resists flame, moisture, weather, UV degradation, chemicals and radiation. Mated with an easy-release film liner, our malleable tape can be shaped into complex or detailed patterns or die-cut into specific shapes to meet assembly and manufacturing process needs.



- Conformable tape resists flame, moisture, weather, UV degradation, and many chemicals used in electroplating and anodizing processes
- The rubber-based adhesive bonds well a variety of surface, including most metals
- Performs over a wide variety of temperatures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100245634 | 420635 | 3M™ Lead Foil Tape 420, Dark Silver, 6.4 mm x 33 m, 0.17 mm | 23 | Roll |
| 7000049101 | 42012" | 3M™ Lead Foil Tape 420, Silver, 12.7 mm x 33 m, 0.17 mm | 18 | Roll |
| 7000001314 | 42025 | 3M [™] Lead Foil Tape 420, Silver, 25 mm x 33 m, 0.17 mm | 9 | Roll |
| 7000001315 | 42050 | 3M [™] Lead Foil Tape 420, Silver, 50 mm x 33 m, 0.17 mm | 6 | Roll |



Polyester Tapes

3M[™] Polyester Tape 8905

Designed to perform in demanding work conditions, our 3M Polyester Tape 8905 is a thick and durable solution for high temperature masking operations such as powder coating. Coated with a silicone adhesive, this tape is designed to bond to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments.

- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- Clean removal during high-temperature masking operations such as powder coating
- Polyester film offers excellent thermal and chemical resistance

| Product II | D Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 70000362 | 203 890525 | 3M [™] Polyester Tape 8905, Blue, 25 mm x 66 m, 0.16 mm | 36 | Roll |
| 70000496 | 604 890550 | 3M [™] Polyester Tape 8905, Blue, 51 mm x 66 m, 0.16 mm | 24 | Roll |

3M[™] Polyester Tape 8902

Our 3M[™] Polyester Tape 8902 excels in high temperature masking operations such as powder coat painting. Coated with a silicone adhesive, this tape bonds to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments. This tape is a thicker version of 3M[™] Polyester Tape 8901.

- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- \bullet Clean removal during high-temperature masking operations such as powder coating
- Get excellent thermal, abrasion and chemical resistance while maintaining flexibility

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049603 | 890250 | 3M [™] Polyester Tape 8902, Blue, 51 mm x 66 m, 0.086 mm | 24 | Roll |

3M[™] Polyester Tape 8901

Thin and conformable, our 3M[™] Polyester Tape 8901 excels in high temperature masking operations such as powder coat painting. Coated with a silicone adhesive, this tape bonds to a variety of difficult surfaces. It is chemical resistant and performs under a wide range of temperatures and environments.

- Works in demanding conditions and high temperatures ranging from -60°F (-50°C) to 400°F (204°C)
- Clean removal during high-temperature masking operations such as powder coating
- Polyester film offers excellent thermal, abrasion and chemical resistance while maintaining flexibility

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049597 | 890125 | 3M™ Polyester Tape 8901, Blue, 25 mm x 66 m, 0.023 mm | 36 | Roll |






144

3M[™] Polyester Tape 876

3M[™] Polyester Tape 876 has a thin, high strength polyester film that provides a degree of conformability while meeting low caliper requirements. This tape works in demanding conditions and provides satisfactory performance in short term bake cycles at 400°F (204°C), as well as longer term autoclave processes up to 350°F (177°C). High temperature resistance and rubber adhesive makes it ideal for paint masking, liquid or powder coat processes where clean removal with no residue is required.



- Easy and clean removal post processing with no residue
- Green color for easy identification and positioning

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100167280 | 87619 | 3M [™] Polyester Tape 876, Green, 19 mm x 66 m, 0.08 mm | 64 | Roll |
| 7100156415 | 87625 | 3M [™] Polyester Tape 876, Green, 25 mm x 66 m, 0.08 mm | 48 | Roll |
| 7100167276 | 8761220 | 3M [™] Polyester Tape 876, Green, 1220 mm x 66 m, 0.08 mm | 1 | Roll |

3M[™] Polyester Tape 875

3M[™] Polyester Tape 875 has a thin, high strength polyester film that provides a degree of conformability while meeting low caliper requirements. This tape works in demanding conditions and provides satisfactory performance in short term bake cycles at 204°C (400°F), as well as longer term autoclave processes up to 177°C (350°F). High temperature resistance and rubber adhesive makes it ideal for paint masking, liquid or powder coat processes where clean removal with no residue is required.

- Works in demanding conditions including High Temperature and autoclave cycles up to 177°C
- Easy and clean removal post processing with no residue
- Green colour for easy identification and positioning

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100167284 | 87519 | 3M [™] Polyester Tape 875, Green, 19 mm x 66 m, 0.05 mm | 64 | Roll |
| 7100156413 | 87525 | 3M [™] Polyester Tape 875, Green, 25 mm x 66 m, 0.05 mm | 48 | Roll |
| 7100167269 | 8751220 | 3M [™] Polyester Tape 875, Green, 1220 mm x 66 m, 0.05 mm | 1 | Roll |

3M[™] Polyester Film Tape 850 Silver

For splicing applications requiring quick stick and an aggressive, permanent hold, use our 3M[™] Polyester Tape 850. Used in a variety of applications, including web processing, label protection, and marking. This tape is available in various Colours, as well as a transparent.

- Aggressive acrylic adhesive provides quick stick and excellent long-term holding in splicing applications
 Thin, high strength polyester film meets low calliper requirements which won't interfere with most ma-
- chinery processes
- Get high tear and temperature resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000047522 | 850\$2566 | 3M [™] Polyester Film Tape 850, Silver, 25 mm x 66 m, 0.05 mm | 36 | Roll |
| 7000028858 | 850S5166 | 3M [™] Polyester Film Tape 850, Silver, 51 mm x 66 m, 0.05 mm | 24 | Roll |







3M[™] Polyester Film Tape 850

For splicing applications requiring quick stick and an aggressive, permanent hold, use our 3M[™] Polyester Tape 850. Used in a variety of applications, including web processing, label protection, and marking. This tape is available in various Colours, as well as a transparent.

- Aggressive acrylic adhesive provides quick stick and excellent long-term holding in splicing applications
 Thin, high strength polyester film meets low calliper requirements which won't interfere with most ma-
- chinery processes
- Get high tear and temperature resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100065924 | 85025TR | 3M [™] Polyester Film Tape 850, Clear, 25 mm x 66 m, 0.05 mm | 36 | Roll |
| 7000028669 | 850R172 | 3M [™] Polyester Film Tape 850, Red, 25 mm x 66 m, 0.05 mm | 36 | Roll |

3M[™] Polyester Tape 8403

For anodizing, composite bonding and splicing, use 3M[™] Polyester Tape 8403. This translucent green tinted tape is coated with a silicone adhesive that bonds well on difficult surfaces, including silicone coated papers and films. It is chemical resistant and performs under a wide range of temperatures and environments. This tape is a thicker version of our 3M[™] Polyester Tape 8402.

- Works in demanding conditions and retains flexibility in autoclave conditions in temperatures ranging from -60°F (-50°C) to 350°F (177°C)
- \bullet Silicone adhesive provides clean removal from a variety of surfaces
- Chemical resistant adhesive and backing provides durability in difficult environments, such as anodization

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000001173 | 84035166 | 3M [™] Polyester Tape 8403, Green, 51 mm x 66 m, 0.061 mm | 24 | Roll |

3M[™] Anodization Masking Tape 8985L

3M[™] Anodization Masking Tape 8985L is a reliable non-silicone solution for Type I (chromic acid) anodization. Designed for performance, it is specifically resistant to chromic acid and provides sharp lines with a rubber adhesive for easy removal.

- Designed specifically for masking in chromic acid (Type I) anodization baths
- Transparent purple tape for fast, easy and accurate positioning
- Provides sharp masking lines and minimizes leaking to reduce the need for part rework

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100207280 | 8985L25 | 3M [™] Anodization Masking Tape 8985L, Purple, 25 mm x 66 m | 48 | Roll |
| 7100207277 | 8985L50 | 3M [™] Anodization Masking Tape 8985L, Purple, 50 mm x 66 m | 24 | Roll |
| 7100207284 | 8985L305 | 3M [™] Anodization Masking Tape 8985L, Purple, 305 mm x 66 m | 4 | Roll |
| 7100211808 | 8985L610 | 3M™ Anodization Masking Tape 8985L, Purple, 610 mm x 66 m | 1 | Roll |
| 7100207286 | 8985L1220 | 3M [™] Anodization Masking Tape 8985L, Purple, 1220 mm x 66 m | 1 | Roll |





PTFE tapes

3M[™] PTFE Film Tape 5480

3M[™] PTFE Skived Film Tape 5480 uses a skived, polytetrafluoroethylene (PTFE), conformable film backing. Our tape offers an extremely low coefficient of friction.

- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- Wide temperature range for performance on heated machinery and equipment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000050128 | 548025 | 3M [™] PTFE Film Tape 5480, Grey, 25 mm x 33 m, 0.09 mm | 9 | Roll |
| 7000029152 | 548050 | 3M™ PTFE Film Tape 5480, Grey, 51 mm x 33 m, 0.09 mm | 6 | Roll |

3M™ PTFE Film Tape 5490

3M[™] PTFE Film Tape 5490 uses an extruded polytetrafluoroethylene (PTFE) film backing. This tape offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a smooth, non-stick surface over a variety of substrates to assist in the movement of materials in many types of lay-flat applications.

- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- \bullet Wide temperature range for performance on heated machinery and equipment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000050122 | 5490-12 | 3M™ PTFE Film Tape 5490, Brown, 12 mm x 33 m, 0.09 mm | 18 | Roll |
| 7000050120 | 5490-25 | 3M [™] PTFE Film Tape 5490, Brown, 25 mm x 33 m, 0.09 mm | 9 | Roll |
| 7000050118 | 549050 | 3M [™] PTFE Film Tape 5490, Brown, 51 mm x 33 m, 0.09 mm | 6 | Roll |
| 7000048721 | 549012 | 3M [™] PTFE Film Tape 5490, Grey, 304.8 mm x 33 m, 0.09 mm | 1 | Roll |

3M[™] PTFE Film Tape 5491

Our 3M[™] PTFE Film Tape 5491 uses an extruded polytetrafluoroethylene (PTFE) film backing. This tape offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a smooth, non-stick surface over a variety of substrates to assist in the movement of materials in many types of lay-flat applications.



- Non-stick PTFE film provides an exceptionally slick surface for easy clean-up
- Silicone adhesive provides clean removal from a variety of surfaces
- Apply a tape that resists curling during unwind

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100221270 | 5491127 | 3M [™] PTFE Film Tape 5491, Brown, 12.7 mm x 33 m, 0.17 mm, Boxed | 14 | Roll |
| 7000001582 | 549125 | 3M [™] PTFE Film Tape 5491, Grey, 25 mm x 33 m, 0.17 mm | 1 | Roll |
| 7000001581 | 549151 | 3M [™] PTFE Film Tape 5491, Grey, 51 mm x 33 m, 0.17 mm | 1 | Roll |
| 7000029150 | 54917633 | 3M™ PTFE Film Tape 5491, Grey, 76 mm x 33 m, 0.17 mm | 3 | Roll |



3M[™] Glass Cloth Tape 5453

Our premium performance 3M[™] PTFE Glass Cloth Tape 5453 has a brown woven glass cloth backing impregnated with PTFE (polytetrafluoroethylene). This tape provides a slick surface on process machinery and offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a non-stick surface that performs at elevated temperatures.



- Premium glass cloth reinforced backing provides greater tensile strength and resistance to tears and punctures than typical PTFE film backed tapes
- Silicone adhesive offers high temperature performance and long aging
- Provides a non-stick, low friction surface on heat sealing and packaging equipment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000050132 | 545319 | 3M™ Glass Cloth Tape 5453, Brown, 19 mm x 33 m, 0.21 mm | 12 | Roll |
| 7000050131 | 97647 | 3M™ Glass Cloth Tape 5453, Brown, 25 mm x 33 m, 0.21 mm | 9 | Roll |
| 7000144794 | 130635 | 3M [™] Glass Cloth Tape 5453, Brown, 50 mm x 33 m, 0.21 mm | 6 | Roll |
| 7000048705 | 5453305 | 3M [™] Glass Cloth Tape 5453, Brown, 305 mm x 33 m, 0.21 mm | 1 | Roll |

3M™ PTFE Glass Cloth Tape 5451

Our premium performance 3M[™] PTFE Glass Cloth Tape 5451 has a brown woven glass cloth backing impregnated with PTFE (polytetrafluoroethylene). This tape provides a slick surface on process machinery and offers an extremely low coefficient of friction which, in combination with a pressure sensitive silicone adhesive, creates a non-stick surface that performs at elevated temperatures.



- Premium glass cloth reinforced backing provides greater tensile strength and resistance to tears and punctures than typical PTFE film backed tapes
- Silicone adhesive offers high temperature performance and long aging
- Performs in humid environments due to its very low moisture absorption

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029154 | 545125 | 3M [™] Glass Cloth Tape 5451, Brown, 25 mm x 33 m, 0.14 mm | 9 | Roll |
| 7000029153 | 54512 | 3M™ Glass Cloth Tape 5451, Brown, 50 mm x 33 m, 0.14 mm | 1 | Roll |

UHMW Tapes

3M[™] UHMW PE Film Tape 5425

3M[™] UHMW PE Film Tape 5425 protects surfaces from abrasion. Our tape has a thickness 0.08 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear with an excellent solvent resistance.

- Get resistance from abrasion, oil and various other solvents
- Achieve low coefficient of friction for 'slip plane' effect between surfaces
- Reduce squeaks, rattles and other noises that occur with movement

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100226808 | 54252536 | 3M™ UHMW PE Film Tape 5425, Transparent, 25 mm x 33 m, 0.13 mm | 8 | Roll |

3M[™] UHMW PE Film Tape 5423

3M[™] UHMW PE Film Tape 5423 protects surfaces from abrasion. Our tape has a thickness 0.025 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear.

- Translucent, abrasion resistant backing helps protect surfaces from wear
- Low coefficient of friction for 'slip plane' effect between surfaces
- Rubber adhesive provides good initial tack for immediate bonding to material surface

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000029144 | 54231916 | 3M™ UHMW PE Film Tape 5423, Transparent, 19 mm x 16.5 m, 0.3 mm | 12 | Roll |
| 7000029146 | 542325 | 3M™ UHMW PE Film Tape 5423, Transparent, 25 mm x 16.5 m, 0.3 mm | 9 | Roll |
| 7000050077 | 542338 | 3M™ UHMW PE Film Tape 5423, Transparent, 38 mm x 16.5 m, 0.3 mm | 6 | Roll |
| 7000035835 | 542350 | 3M™ UHMW PE Film Tape 5423, Transparent, 51 mm x 16.5 m, 0.3 mm | 1 | Roll |
| 7000029136 | 5423101 | 3M [™] UHMW PE Film Tape 5423, Transparent, 102 mm x 16.5 m, 0.3 mm | 3 | Roll |
| 7000048716 | 5423254 | 3M™ UHMW PE Film Tape 5423, Transparent, 254 mm x 16.5 m, 0.3 mm | 1 | Roll |
| 7000001210 | 5423610 | 3M™ UHMW PE Film Tape 5423, Transparent, 610 mm x 16.5 m, 0.3 mm | 1 | Roll |

3M[™] UHMW PE Film Tape 5421

3M[™] UHMW PE Film Tape 5421 protects surfaces from abrasion. Our tape has a thickness 0.01 mm that offers excellent abrasion resistance, making it ideal for many tough impact wear or sliding applications. It creates a 'slip plane' effect to allow contact without wear. This is a thinner version of 3M[™] UHMW-PE Film Tape 5423.



- Low coefficient of friction for 'slip plane' effect between surfaces
- Rubber adhesive provides good initial tack for immediate bonding to material surface

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000050074 | 542119 | 3M™ UHMW PE Film Tape 5421, Clear, 19 mm x 16.5 m, 0.17 mm | 12 | Roll |
| 7000050075 | 542125 | 3M [™] UHMW PE Film Tape 5421, Clear, 25 mm x 16.5 m, 0.17 mm | 9 | Roll |
| 7000050076 | 542150 | 3M™ UHMW PE Film Tape 5421, Clear, 51 mm x 16.5 m, 0.17 mm | 6 | Roll |
| 7000050053 | 5421418 | 3M™ UHMW PE Film Tape 5421, Clear, 102 mm x 16.5 m, 0.17 mm | 3 | Roll |





Filament Tapes

Scotch® Bi-Directional Universal Filament Tape 8959

Scotch® Bi-Directional Filament Tape 8959 is a tough box-sealing tape with exceptional adhesion that also resists nicks, abrasions, moisture, scuffing, and center seam splitting in both longitudinal and horizontal directions.

- Extra security with filaments down the length and across the width, tape is difficult to hand-tear in any direction
- Fiberglass filaments run in bi-directional pattern, providing high tensile strength across the width and length of the tape
- Ideal strength for heavy-weight packages and overseas/export packing and shipping

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000062460 | 895919BL | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 19 mm x 50 m, 0.15 mm | 12 | Roll |
| 7000095268 | 895919 | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 19 mm x 50 m, 0.15 mm | 48 | Roll |
| 7000095261 | 89592550 | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 25 mm x 50 m, 0.15 mm | 36 | Roll |
| 7000095309 | 895938 | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 38 mm x 50 m, 0.15 mm | 24 | Roll |
| 7000095244 | 895950 | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm | 18 | Roll |
| 7000062459 | H895950 | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm | 12 | Roll |
| 7100144090 | 895950UK | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 50 mm x 50 m, 0.15 mm | 18 | Roll |
| 700008397 | 8959KURZ | Scotch® Bi-Directional Universal Filament Tape 8959, Transparent, 1350 mm x 45 m, 0.15 mm | 12 | Roll |

Scotch® Filament Tape 890MSR

For applications requiring adhesion to oily surfaces, use our Scotch® Filament Tape 890MSR. This filament-reinforced tape is ideal for bundling and wrapping applications on heavy gauge metals or applications that might become exposed to gas or oil. It offers long-term holding power, very-high tensile strength, and excellent abrasion, moisture and scuff resistance.



- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Modified synthetic rubber adhesive provides better adhesion than natural rubber adhesives and bonds
- well to metals and oily surfaces
- Glass yarn filaments add strength for pipe wrapping applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7000035410 | 890MSR50X50 | Scotch® Filament Tape 880MSR, Clear, 50 mm x 50 m, 0.17 mm | 18 | Roll |
| 7000095844 | 890MSR25X50 | Scotch® Filament Tape 890MSR, Clear, 25 mm x 50 m, 0.17 mm | 36 | Roll |
| 7000095843 | 890MSR100X50 | Scotch® Filament Tape 890MSR, Clear, 100 mm x 50 m, 0.2 mm | 12 | Roll |
| 7000095876 | 890MSR1550X50 | Scotch® Filament Tape 890MSR, Clear, 1550 m x 50 m, 0.17 mm | 3 | Roll |

Scotch® Filament Tape 898

With a polypropylene backing that resists abrasion, moisture, scuffing and breaks, try Scotch® Filament Tape 898. This filament-reinforced tape is ideal for securing boxes, bundling pipe or reinforcing large bulk containers, Scotch® Filament Tape 898 is a high-strength, reliable and affordable solution for product and package integrity.

- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Secure L-clip closure for full overlap (FOL), tuck-type boxes or other non-standard boxes
- Synthetic rubber adhesive bonds easily to most fiberboard, plastics and metal surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001229 | 8982455 | Scotch® Filament Tape 898, Clear, 24 mm x 55 m, 0.17 mm | 36 | Roll |

Scotch® Filament Tape Clean Removal 8915

Our Scotch® Filament Tape 8915 Clean Removal is specifically designed to hold appliance parts and other consumer goods in place during manufacturing and shipping. Reinforced with continuous glass-yarn filaments, this high-performance tape provides high adhesion to a wide variety of substrates, but removes cleanly and is stain resistant on some finishes.

- Filament-reinforced tape resists nicks, abrasion and moisture
- Designed for temporary holding applications such as holding appliance parts and other consumer goods together during manufacture and shipping
- Adhesive offers clean removal and stain resistance on some finishes

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000059884 | 891518BL | Scotch® Filament Tape Clean Removal 8915, Blue, 18 mm x 55 m, 0.15 mm | 48 | Roll |
| 7000059885 | 891524B | Scotch® Filament Tape Clean Removal 8915, Blue, 24 mm x 55 m, 0.15 mm | 36 | Roll |
| 7000048604 | 89151255 | Scotch® Filament Tape Clean Removal 8915, Transparent, 12 mm x 55 m, 0.15 mm | 72 | Roll |
| 7000048605 | 891518 | Scotch® Filament Tape Clean Removal 8915, Transparent, 18 mm x 55 m, 0.15 mm | 1 | Roll |
| 7000048606 | 891524 | Scotch® Filament Tape Clean Removal 8915, Transparent, 24 mm x 55 m, 0,15 mm | 36 | Roll |
| 7000048608 | 891548 | Scotch® Filament Tape Clean Removal 8915, Transparent, 48 mm x 55 m, 0.15 mm | 24 | Roll |
| 7000037570 | 891576855 | Scotch® Filament Tape Clean Removal 8915, Transparent, 768 mm x 55 m, 0.15 mm | 4 | Roll |

Scotch® General Purpose Filament Tape 8956

Scotch® General Purpose Filament Tape 8956 is mainly used for holding boxes together on pallets, salvaging torn and damaged boxes, bundling of light weight products, closing and reinforcing of fiberboard boxes.

• It guarantees a good closure on very large boxes (household appliances for example).

- High tensile strength. Good shear strength.
- Good support for a wide range of applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000035364 | 89561950 | Scotch® General Purpose Filament Tape 8956, White, 19 mm x 50 m, 0.12 mm | 48 | Roll |
| 7000035365 | 895625 | Scotch® General Purpose Filament Tape 8956, White, 25 mm x 50 m, 0.12 mm | 36 | Roll |
| 7000035363 | 89565050 | Scotch® General Purpose Filament Tape 8956, White, 50 mm x 50 m, 0.12 mm | 18 | Roll |

Scotch® High Performance Filament Tape 8981

With a polypropylene backing and glass yarn reinforcement, Scotch® Filament Tape 8981 resists abrasion, moisture, scuffing and breaks. This filament-reinforced tape is ideal for securing boxes, bundling pipe or reinforcing large bulk containers, Scotch® Filament Tape 8981 is a high-strength, reliable and affordable solution for product and package integrity.

- Industrial-strength, filament-reinforced tape resists nicks, abrasion and moisture
- Synthetic rubber adhesive bonds easily to most fibreboard, plastics and metal surfaces
- Glass yarn filaments add strength for box closing, bundling and more

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095574 | 89811250 | Scotch® High Performance Filament Tape 8981, Transparent, 12 mm x 50 m, 0.17 mm | 72 | Roll |
| 7000035392 | 898119 | Scotch® High Performance Filament Tape 8981, Transparent, 19 mm x 50 m, 0.17 mm | 48 | Roll |
| 7000095576 | 898125 | Scotch® High Performance Filament Tape 8981, Transparent, 25 mm x 50 m, 0.17 mm | 36 | Roll |
| 7000095577 | 89815050 | Scotch® High Performance Filament Tape 8981, Transparent, 50 mm x 50 m, 0.17 mm $$ | 18 | Roll |

Scotch® Performance Filament Tape 895

High performance backing reinforced with continuous glass yarn across length and width for added strength - resists tearing. For heavy weight packages and overseas, export shipments. Strong backing is abrasion, moisture and scuff resistant.

ng power g, strapping and reinforcing



- Balanced performance, combining high adhesion power and long-term holding power
- Synthetic rubber adhesive has good shear strength to fiberboard for bundling, strapping and reinforcing applications.
- High strength Bi-Directional filament reinforced tape

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095570 | 8951250 | Scotch® Performance Filament Tape 895, Transparent, 12 mm x 50 m, 0.15 mm | 72 | Roll |
| 7000035390 | 89519 | Scotch® Performance Filament Tape 895, Transparent, 19 mm x 50 m, 0.15 mm | 48 | Roll |
| 7000095572 | 8952550 | Scotch® Performance Filament Tape 895, Transparent, 25 mm x 50 m, 0.15 mm | 36 | Roll |
| 7000035391 | 89550 | Scotch® Performance Filament Tape 895, Transparent, 50 mm x 50 m, 0.15 mm | 18 | Roll |
| 7000095579 | 89510050 | Scotch® Performance Filament Tape 895, Transparent, 100 mm x 50 m, 0.15 mm | 10 | Roll |

Tartan™ Filament Tape 8953

Long life filament adhesive tape. This tape is used for many applications such as securing a pallet package, assembling products, closing and reinforcing packaging cartons. Once glued, the tape retains its adhesive strength under all temperatures, temperatures it will face during transport and storage.



- General use in cardboard reinforcement or light wrapping, maintenance.
- Polypropylene Film, Fibreglass reinforced
- Easily accomplished at room temperature

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095695 | 89531250 | Tartan [™] Filament Tape 8953, Transparent, 12 mm x 50 m, 0.1 mm | 72 | Roll |
| 7100144053 | 895319UK | Tartan [™] Filament Tape 8953, Transparent, 19 mm x 50 m | 48 | Roll |
| 7000095696 | 895375 | Tartan [™] Filament Tape 8953, Transparent, 75 mm x 50 m, 0.1 mm | 12 | Roll |
| 7000095694 | 89531350 | Tartan™ Filament Tape 8953, Transparent, 1350 mm x 50 m, 0.1 mm | 24 | Roll |

Tartan™ Filament Tape 8954

Tartan™ Filament Tape 8954 is a polypropylene filament adhesive tape with strong fiberglass reinforcement (longitudinal and transversal) with synthetic rubber glue with excellent resistance to tearing, abrasion and moisture. Thickness 0,13 mm.



- General maintenance use in cardboard reinforcement or light wrapping
- Polypropylene Film, Fibreglass reinforced
- Easily accomplished at room temperature

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095690 | 895419 | Tartan [™] Filament Tape 8954, Tan, 19 mm x 50 m, 0.125 mm | 48 | Roll |
| 7000095691 | 895425 | Tartan [™] Filament Tape 8954, Tan, 25 mm x 50 m, 0.125 mm | 36 | Roll |
| 7100003930 | 89541350 | Tartan [™] Filament Tape 8954, Transparent, 1.35 m x 50 m, 0.125 mm | 12 | Roll |

Scotch® Film Strapping Tape 8898

Our Scotch® Strapping Tape 8898 is a high performance tape specifically formulated for use in many industries, including appliance, metalworking and general industrial. The tensilized polypropylene film backing features a pressure-sensitive synthetic rubber adhesive that provides high initial adhesion holding power and clean removal from some surfaces, such as metal.

- Removes cleanly and resists stains on some surfaces, such as metal
- Proprietary 3M pressure-sensitive synthetic rubber adhesive is specifically formulated to adhere evenly and bond firmly to long lasting hold
- Cut out breaks or tears even if nicked or punctured during handling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000028946 | 678051 | Scotch® Film Strapping Tape 8898, Blue, 18 mm x 55 m, 0.12 mm | 48 | Roll |
| 7000048850 | 889824 | Scotch® Film Strapping Tape 8898, Blue, 24 mm x 55 m, 0.12 mm | 36 | Roll |
| 7000028947 | 88984855 | Scotch® Film Strapping Tape 8898, Blue, 48 mm x 55 m, 0.12 mm | 24 | Roll |

Specialty Application Tapes

3M[™] Glass Cloth Tape 361

Use 3M[™] Glass Cloth Tape 361 for applications requiring high temperature resistance. Our tape has a pressure sensitive silicone adhesive for applications requiring high adhesion, long ageing, good holding power and clean removal. The strong abrasion resistant backing is ideal for use as masking protection in thermal spray operations.

- Protect surfaces and materials from intermittent temperatures up to 288 °C
- Use in aerospace, automotive, military, roofing, specialty vehicles and ship building
- Splice fabrics, sealing panels and use for heavy duty masking, bundling, holding and harness wrapping

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100226547 | 75596 | 3M [™] Glass Cloth Tape 361, White, 19 mm x 55 m, 0.16 mm | 8 | Roll |
| 7000047441 | 3613460 | 3M [™] Glass Cloth Tape 361, White, 19 mm x 55 m, 0.17 mm | 1 | Roll |
| 7000047442 | 361160 | 3M [™] Glass Cloth Tape 361, White, 25 mm x 55 m, 0.17 mm | 36 | Roll |
| 7000050071 | 3612555 | 3M [™] Glass Cloth Tape 361, White, 25 mm x 55 m, 0.17 mm | 9 | Roll |
| 7000035829 | 361260 | 3M [™] Glass Cloth Tape 361, White, 51 mm x 55 m, 0.17 mm | 24 | Roll |
| 7000029149 | 3612460 | 3M™ Glass Cloth Tape 361, White, 610 mm x 55 m, 0.17 mm | 1 | Roll |

3M[™] High Temperature Aluminium Foil/Glass Cloth Tape 363

3M[™] High Temperature Aluminum Foil/Glass Cloth Tape 363 is very strong and flexible and designed for heat shielding in aerospace, automotive and industrial applications. Our tape combines foil backing with glass cloth tape and pressure sensitive silicone adhesive.



- Can easily be die-cut into special sizes or shapes
- Light, flexible construction easily applied to a variety of irregular shapes
- Performs continuously from -54 °C to 316 °C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000048939 | 3631233 | 3M [™] High Temperature Aluminium Foil/Glass Cloth Tape 363, Silver, 12 mm x 32 m, 0.19 mm | 72 | Roll |

3M[™] High Temperature Aluminium Foil/Glass Cloth Tape 363L

3M[™] High Temperature Aluminum Foil/Glass Cloth Tape 363L (linered vesion of 363) is very strong and flexible and designed for heat shielding in aerospace, automotive and industrial applications. Our tape combines foil backing with glass cloth tape and pressure sensitive silicone adhesive.

- Can easily be die-cut into special sizes or shapes
- Light, flexible construction easily applied to a variety of irregular shapes
- Performs continuously from -54 °C to 316 °C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000147746 | 363L914 | 3M™ High Temperature Aluminium Foil/Glass Cloth Tape 363L, Silver, 914 mm x 33 m | 1 | Roll |

3M[™] Flame Retardant Sealing Tape 398FR

Our 3M[™] Glass Cloth Tape 398FR has an acrylic adhesive for many applications requiring high adhesion, an abrasion-resistant backing and flame retardant properties.

- Abrasion resistance and good temperature resistance helps reduce failure due to wear
- Acrylic adhesive has excellent long-ageing properties ideal for many permanent applications
- High conformability allows tape to bond over a variety of difficult textures and uneven or curved surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100003056 | 398FR50 | 3M [™] Flame Retardant Sealing Tape 398FR, White, 51 mm x 33 m, 0.18 mm | 24 | Roll |
| 7000001301 | 398FR75 | 3M [™] Flame Retardant Sealing Tape 398FR, White, 76 mm x 33 m, 0.18 mm | 12 | Roll |

3M[™] Venting Tape 3294

3M[™] Venting Tape 3294 is a pink non-woven, synthetic backing with a strip-coated low-tack pressure sensitive acrylic adhesive for use in various venting applications requiring high outgassing rates.



- Meets most outgassing requirements for foam-in-place insulation processes
- Adhesive is strip-coated so uncoated areas have higher permeability to help minimize foaming voids

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000048712 | 329450 | 3M [™] Venting Tape 3294, Pink, 51 mm x 33 m, 0.13 mm | 24 | Roll |



Masking Tapes

3M[™] General Purpose Masking Tape 101E

3M[™] Value Masking Tape 101E is a smooth, multi-purpose crepe paper tape for room temperature indoor light-duty applications. It is ideal for non-critical paint masking, but also bundling, sealing, attaching, and other applications. Chamois color, rubber adhesive, thickness 0,12mm, this tape is designed for general use.

- Good initial tack to a wide variety of surfaces in different applications
- For indoor use
- For light-duty applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100260268 | 101E/1845 | 3M™ General Purpose Masking Tape 101E, Beige, 18 mm x 45 m, Roll labelled | 48 | Roll |
| 7100135739 | 101E 18X50 NEW | 3M [™] General Purpose Masking Tape 101E, Beige, 18 mm x 50 m | 48 | Roll |
| 7100260269 | 101E/2445 | 3M™ General Purpose Masking Tape 101E, Beige, 24 mm x 45 m, Roll labelled | 36 | Roll |
| 7100135737 | 101E 24X50 NEW | 3M [™] General Purpose Masking Tape 101E, Beige, 24 mm x 50 m | 36 | Roll |
| 7100135748 | 101E/30 | 3M™ General Purpose Masking Tape 101E, Beige, 30 mm x 50 m | 32 | Roll |
| 7100260270 | 101E/3645 | 3M™ General Purpose Masking Tape 101E, Beige, 36 mm x 45 m, Roll labelled | 24 | Roll |
| 7100135761 | 101E 36X50 NEW | 3M™ General Purpose Masking Tape 101E, Beige, 36 mm x 50 m | 24 | Roll |
| 7100260271 | 101E/4845 | 3M [™] General Purpose Masking Tape 101E, Beige, 48 mm x 45 m, Roll labelled | 24 | Roll |
| 7100135720 | 101E 48X50 NEW | 3M™ General Purpose Masking Tape 101E, Beige, 48 mm x 50 m | 24 | Roll |
| 7100044325 | 101E72I | 3M™ General Purpose Masking Tape 101E, Beige, 72 mm x 50 m | 16 | Roll |
| 7100065027 | 101E100I | 3M™ General Purpose Masking Tape 101E, Beige, 100 mm x 50 m | 12 | Roll |
| 7100053516 | 101ELOGI | 3M™ General Purpose Masking Tape 101E, Beige, 1610 mm x 50 m | 3 | Roll |

3M[™] General Purpose Masking Tape 201E

The 3M[™] General Purpose Masking Tape 201E is a premium-quality masking tape used for short-term paint masking, fixing, bundling, holding, sealing, and other applications up to a temperature of 80°C for one hour. Chamois color, rubber adhesive, thickness 0,135mm.



- Good instant adhesion and holding power that resists lifting or curling
- Good solvent and moisture resistance, for indoor use
- Conformable tape, does not tear when unfolding

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100196060 | 201E/18 | 3M™ General Purpose Masking Tape 201E, Beige, 18 mm x 50 m | 48 | Roll |
| 7100195952 | 201E/24 | 3M™ General Purpose Masking Tape 201E, Beige, 24 mm x 50 m | 36 | Roll |
| 7100196064 | 201E/30 | 3M [™] General Purpose Masking Tape 201E, Beige, 30 mm x 50 m | 32 | Roll |
| 7100196061 | 201E/36 | 3M™ General Purpose Masking Tape 201E, Beige, 36 mm x 50 m | 24 | Roll |
| 7100195888 | 201E/48 | 3M [™] General Purpose Masking Tape 201E, Beige, 48 mm x 50 m | 24 | Roll |
| 7100044328 | 201E72I | 3M™ General Purpose Masking Tape 201E, Beige, 72 mm x 50 m | 16 | Roll |
| 7100053515 | 201ELOGI | 3M™ General Purpose Masking Tape 201E, Beige, 1610 mm x 50 m | 3 | Roll |



Focus

3M[™] Performance Industrial Masking Tape 301E

3M™ Performance Industrial Masking Tape 301E is a thick crepe paper tape for industrial applications with good water resistance.

- Its thick support facilitates the realization of lines
- For indoor use
- Resistant to solvents and moisture



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100042898 | 301E18 | 3M™ Performance Industrial Masking Tape 301E, Beige, 18 mm x 50 m | 48 | Roll |
| 7100042901 | 301E24 | 3M™ Performance Industrial Masking Tape 301E, Beige, 24 mm x 50 m | 36 | Roll |
| 7100042902 | 301E36 | 3M™ Performance Industrial Masking Tape 301E, Beige, 36 mm x 50 m | 24 | Roll |
| 7100042903 | 301E48 | 3M™ Performance Industrial Masking Tape 301E, Beige, 48 mm x 50 m | 20 | Roll |
| 7100044391 | 301E72 | 3M™ Performance Industrial Masking Tape 301E, Beige, 72 mm x 50 m | 12 | Roll |
| 7100042956 | 301ELOG | 3M™ Performance Industrial Masking Tape 301E, Beige, 1526 mm x 50 m | 9 | Roll |

Focus

3M[™] Performance Masking Tape 401E

3M[™] Performance Masking Tape 401E is a smooth crepe paper tape with high tensile strength. Buff color, rubber adhesive, thickness 0.170 mm. It may be exposed to temperatures up to 140 ° C. Ideal in painting baking processes.



- Ideal combinations of adhesion and resistance to high temperatures
- Suitable for all oven-drying systems, infrared, or heat lamps
- It may be exposed to temperatures up to 140 ° C

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100042899 | 401E18 | 3M [™] Performance Masking Tape 401E, Brown, 18 mm x 50 m | 48 | Roll |
| 7100042900 | 401E24 | 3M [™] Performance Masking Tape 401E, Brown, 24 mm x 50 m | 36 | Roll |
| 7100042904 | 401E36 | 3M [™] Performance Masking Tape 401E, Brown, 36 mm x 50 m | 24 | Roll |
| 7100042954 | 401E48 | 3M [™] Performance Masking Tape 401E, Brown, 48 mm x 50 m | 20 | Roll |
| 7100044392 | 401E72 | 3M [™] Performance Masking Tape 401E, Brown, 72 mm x 50 m | 12 | Roll |
| 7100042957 | 401ELOG | 3M™ Performance Masking Tape 401E, Brown, 1526 mm x 50 m | 9 | Roll |

Focus

3M[™] High Temperature Industrial Masking Tape 501E

3M™ High Temperature Industrial Masking Tape 501E is a buff-colored crepe paper tape coated with a 0.150 mm thick rubber adhesive.

- Can withstand medium temperature bake ovens up to + 160°C/1h
- Resists high temperatures for indoor use
- The most powerful paperback masking tape



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100098737 | 718399 | 3M™ High Performance Industrial Masking Tape 501E, Beige, 100 mm x 50 m | 8 | Roll |
| 7100042890 | 501E18 | 3M™ High Temperature Industrial Masking Tape 501E, Beige, 18 mm x 50 m | 48 | Roll |
| 7100042893 | 501E24 | 3M™ High Temperature Industrial Masking Tape 501E, Beige, 24 mm x 50 m | 36 | Roll |
| 7100042894 | 501E36 | 3M™ High Temperature Industrial Masking Tape 501E, Beige, 36 mm x 50 m | 24 | Roll |
| 7100042895 | 501E48 | 3M [™] High Temperature Industrial Masking Tape 501E, Beige, 48 mm x 50 m | 20 | Roll |
| 7100042982 | 501E72 | 3M™ High Temperature Industrial Masking Tape 501E, Beige, 72 mm x 50 m | 12 | Roll |
| 7100042958 | 501ELOG | 3M™ High Temperature Industrial Masking Tape 501E, Beige, 1526 mm x 50 m | 9 | Roll |

Scotch® Crepe Masking Tape 202

Get Scotch® Crepe Masking Tape 202, a high performance paint masking tape designed with a heavy, thick, and crepe paper backing to provide sharp paint lines. Our tape has natural rubber adhesive that gives good, instant adhesion and excellent holding power and is easy to tear for simple application.



- Get sharp paint lines
- Apply for good, instant adhesion and excellent holding power
- Cleanly remove from difficult surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100041928 | 20218 | Scotch® Crepe Masking Tape 202, Beige, 18 mm x 50 m, 0.17 mm | 48 | Roll |
| 7100044183 | 20224 | Scotch® Crepe Masking Tape 202, Beige, 24 mm x 50 m, 0.17 mm | 36 | Roll |
| 7000088544 | 350899 | Scotch® Crepe Masking Tape 202, Beige, 30 mm x 50 m, 0.17 mm | 32 | Roll |
| 7100044184 | 20236 | Scotch® Crepe Masking Tape 202, Beige, 36 mm x 50 m, 0.17 mm | 24 | Roll |
| 7100044185 | 20248 | Scotch® Crepe Masking Tape 202, Beige, 48 mm x 50 m, 0.17 mm | 20 | Roll |
| 7100044186 | 20272 | Scotch® Crepe Masking Tape 202, Beige, 72 mm x 50 m, 0.17 mm | 12 | Roll |

Scotch® Fine Line Tape 218

Create long straight lines and sweeping curves where a crisp, sharp paint line is desired, with Scotch® Fine Line Tape 218. Our tape is often used as a layout tape for high value multi-colour and custom painted graphics, and its thinness provides excellent colour line separation.



- Create long straight lines and sweeping curves where a crisp, sharp paint line is desired
- Use as a layout tape for high value multi-colour and custom painted graphics
- Get excellent colour line separation due to its thinness

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048455 | 06520B | Scotch® Fine Line Tape 218, Green, 3.2 mm x 55 m, 0.13 mm, PN6300 | 12 | Roll |
| 7000048456 | 06301 | Scotch® Fine Line Tape 218, Green, 6 mm x 55 m, 0.127 mm, PN6301 | 12 | Roll |
| 7000028866 | 06521B | Scotch® Fine Line Tape 218, Green, 6.4 mm x 55 m, 0.127 mm | 144 | Roll |
| 7000048457 | 2183/8 | Scotch® Fine Line Tape 218, Green, 9 mm x 55 m, 0.127 mm, PN6302 | 12 | Roll |
| 7000048458 | 2181255 | Scotch® Fine Line Tape 218, Green, 12 mm x 55 m, 0.127 mm, PN6303 | 12 | Roll |
| 7000048422 | 06522B | Scotch® Fine Line Tape 218, Green, 12.7 mm x 55 m, 0.127 mm | 72 | Roll |
| 7000048423 | 06523B | Scotch® Fine Line Tape 218, Green, 19 mm x 55 m, 0.127 mm | 48 | Roll |
| 7000048459 | 21819IW | Scotch® Fine Line Tape 218, Green, 19 mm x 55 m, 0.127 mm, PN6305 | 12 | Roll |
| 7000001161 | 2182555 | Scotch® Fine Line Tape 218, Green, 25 mm x 55 m, 0.127 mm | 36 | Roll |
| 7000028860 | 21850 | Scotch® Fine Line Tape 218, Green, 50 mm x 55 m, 0.127 mm | 24 | Roll |

Scotch® Paint Masking Tape 231/231A

Scotch® Paint Masking Tape 231/231A is a premium high-performance crepe paper masking tape designed to meet masking needs in most industrial painting situations, including the use of bake cycles. Our smooth masking tape embodies all the features that are desirable in a paint masking tape and designed specifically for the professional painter.



- Rubber adhesive provides instant adhesion and resists lifting or curling for sharp paint lines
- Smooth mini-crepe paper backing conforms and maintains integrity when formed around a corner
- Backing is easy to tear resists slivering and provides one piece removal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000088515 | 328228 | Scotch® Paint Masking Tape 231/231A, Tan, 36 mm x 55 m, 0.19 mm | 24 | Roll |
| 7000088516 | 328227 | Scotch® Paint Masking Tape 231/231A, Tan, 48 mm x 55 m, 0.19 mm | 24 | Roll |
| 7000088517 | 328226 | Scotch® Paint Masking Tape 231/231A, Tan, 72 mm x 55 m, 0.19 mm | 12 | Roll |

3M[™] High Performance Masking Tape 232

Scotch® High Performance Masking Tape 232 produces sharp paint lines in medium temperature paint bake operations and provides clean removal, even on difficult to remove from surfaces. The thick crepe paper backing contains a solvent-resistant saturant that helps resist paint bleed-through against latex and oil-based paints.



• Rubber adhesive provides instant adhesion and resists lifting or curling for sharp paint lines

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100041614 | 23224 | 3M™ High Performance Masking Tape 232, Beige, 24 mm x 50 m | 36 | Roll |

Scotch® Performance Masking Tape 244

Scotch® Performance Masking Tape 244 is provided with a yellow smooth paper backing and a 0.085 mm thick synthetic adhesive. This tape is particularly resistant to UV, and is waterproof. It has a good temperature resistance (100 ° C).

- Designed with a flat paper backing with synthetic adhesive, this tape offers a good solvent and water resistance and a good paint anchorage
- Adhesive transfer resistance and sunlight stability as well as a good temperature resistance (100 ° C for 30 min)
- It offers a good paint line, good handling, good paint flaking resistance and clean removal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100046034 | 24418 | Scotch® Performance Masking Tape 244, Gold, 18 mm x 50 m | 48 | Roll |
| 7100046035 | 24424 | Scotch® Performance Masking Tape 244, Gold, 24 mm x 50 m | 36 | Roll |
| 7100046036 | 703968 | Scotch® Performance Masking Tape 244, Gold, 24 mm x 100 m | 48 | Roll |
| 7100146753 | 24430 | Scotch® Performance Masking Tape 244, Gold, 30 mm x 50 m | 32 | Roll |
| 7100046037 | 2443650 | Scotch® Performance Masking Tape 244, Gold, 36 mm x 50 m | 24 | Roll |
| 7100048317 | 704013 | Scotch® Performance Masking Tape 244, Gold, 36 mm x 100 m | 32 | Roll |
| 7100046038 | 24448 | Scotch® Performance Masking Tape 244, Gold, 48 mm x 50 m | 24 | Roll |
| 7100046039 | 704053 | Scotch® Performance Masking Tape 244, Gold, 48 mm x 100 m | 24 | Roll |

Scotch® Low Adhesion Masking Tape 1104

Scotch® Low Adhesion Masking Tape 1104 has been designed for applications where less aggressive adhesion is required. It is used in most masking operations and cleanly removed after a cooking time of 60 minutes at 135° C.

- It allows a sharp demarcation, good masking in the curves.
- Perfectly suited for critical surfaces like aluminum, or anodized titanium, wood and wallpaper, lacquered surfaces or other delicate surfaces.
- High temperature resistance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100044284 | 110424 | Scotch® Low Adhesion Masking Tape 1104, Beige, 24 mm x 50 m | 36 | Roll |
| 7100044286 | 110448 | Scotch® Low Adhesion Masking Tape 1104, Beige, 48 mm x 50 m | 20 | Roll |

3M[™] High Performance Masking Tape 2693

Use Scotch® High Performance Masking Tape 2693 when very aggressive room temperature and high temperature holding is required. Our tape is designed for use with automotive, truck and bus applications.

- \bullet Use for automotive, truck and bus applications
- Apply when very aggressive room temperature and high temperature holding is required
- Get a heavy duty, mini-crepe paper masking tape

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000088347 | 269348 | Scotch® High Performance Masking Tape 2693, Tan, 48 mm x 55 m | 24 | Roll |
| 7000088390 | 225126 | Scotch® High Performance Masking Tape 2693, Tan, 72 mm x 55 m, 0.20 mm | 12 | Roll |





Focus

Scotch® Masking Tape 2800

Scotch® Masking Tape 2800 is designed especially for masking thermoplastic olefin (TPO) surfaces and for bake cycles that reach up to 149°C for 30 minutes. It is compatible with most industrial paints and painting processes and removes cleanly for up to 7 days outdoors with no residue, tracking or bleeding.



- Fine line paint masking designed especially for thermoplastic olefin (TPO) surfaces
- Formulated for bake cycles up to 149°C for 30 minutes
- Provides sharp lines and removes cleanly with no residue, tracking or bleeding; resists ghosting

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100280536 | 2800.12 | Scotch® Masking Tape 2800, Blue, 12 mm x 50 m | 96 | Roll |
| 7100280538 | 28001950 | Scotch® Masking Tape 2800, Blue, 19 mm x 50 m | 64 | Roll |
| 7100281475 | 28002550 | Scotch® Masking Tape 2800, Blue, 25 mm x 50 m | 48 | Roll |

Scotch® High Temperature Fine Line Tape 4735

Scotch® High Temperature Fine Line Tape 4735 is a highly conformable tape used to achieve sharp contrast and color separation while painting on highly contoured, curved and shaped surfaces. It has proven successful in high-temperature painting applications requiring a highly conformable tape.

- Mask where fine, critical paint break lines are required
- \bullet Natural rubber adhesive for good instant adhesion.
- Use when masking fascia panels, two-tone and other multiple colour applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000048652 | 473519 | Scotch® High Temperature Fine Line Tape 4735, Orange, 19 mm x 33 m, 0.137 mm | 48 | Roll |
| 7000048833 | 414027 | Scotch® High Temperature Fine Line Tape 4735, Orange, 25 mm x 33 m, 0.137 mm | 36 | Roll |

Scotch® High Temperature Fine Line Tape 4737TL

Scotch® High Temperature Fine Line Tape 4737TL is a conformable tape used to achieve sharp paint lines and color separation for curves and straight lines. It has proven successful in high-temperature painting applications requiring a conformable tape.



- Delivers clean paint line and excellent color separation in high-temperature paint processes
- Provides optimal conformability for sweeping shapes and recessed objects
- Uses a natural rubber, pressure-sensitive adhesive that holds reliably to surface contours

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048634 | 160924 | Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 6 mm x 33 m, 0.137 mm | 144 | Roll |
| 7000048629 | 473712 | Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 12.7 mm x 33 m, 0.137 mm | 72 | Roll |
| 7000048628 | 4737T193 | Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 19 mm x 33 m, 0.137 mm | 48 | Roll |
| 7000048627 | 4737T | Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 25 mm x 33 m, 0.14 mm | 36 | Roll |
| 7000048610 | 4737T2 | Scotch® High Temperature Fine Line Tape 4737T, Translucent Blue, 50 mm x 33 m, 0.137 mm | 24 | Roll |

3M™ Aqua Washi Tape 2899

The masking tape 2899 is a blue coloured masking tape with a thin flat Washi paper backing and an acrylic adhesive, well suited for general paint masking. Its thickness is 0,081mm and its Tensile strength is 30,7 N/cm. Temp resistance is 150C for 1h on stainless steel.



- Designed with a thin flexible backing for consistently sharp paint edges on both curved and straight paint lines
- Firm acrylic adhesive afford easy removal and a good temperature resistance
- Easy to tear by hand, with additives incorporated into the backing to prevent paint flaking

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100193857 | 28991250 | 3M [™] Aqua Washi Tape 2899, Blue,1250 mm x 50 m | 24 | Roll |
| 7100055250 | 289918 | 3M [™] Aqua Washi Tape 2899, Blue, 18 mm x 50 m | 48 | Roll |
| 7100055239 | 289924 | 3M [™] Aqua Washi Tape 2899, Blue, 24 mm x 50 m | 36 | Roll |
| 7100055251 | 289930 | 3M [™] Aqua Washi Tape 2899, Blue, 30 mm x 50 m | 32 | Roll |
| 7100055252 | 289936 | 3M [™] Aqua Washi Tape 2899, Blue, 36 mm x 50 m | 24 | Roll |
| 7100055238 | 289948 | 3M [™] Aqua Washi Tape 2899, Blue, 48 mm x 50 m | 24 | Roll |

Paper Masking Tapes

3M[™] Performance Flatback Tape 2525

3M[™] Performance Flatback Tape 2525 is a reliable tape ideal for splicing and paint masking applications where adhesion in high temperature bake cycles is necessary. This tough tape features a dependable smooth paper backing capable of resisting high temperatures as well as moisture, and can be torn by hand for easy application. It is available in orange for improved visibility.

- Designed for high temperature splicing and paint masking
- Can withstand a bake cycle up to 300°F/149°C for up to one hour
- Natural rubber adhesive offers dependable tack and holding power

| Carlos . |
|----------|
| |
| |
| |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100016326 | 327222 | 3M [™] Performance Flatback Tape 2525, Orange, 24 mm x 55 m, 0.24 mm | 36 | Roll |
| 7000088507 | 327221 | 3M [™] Performance Flatback Tape 2525, Orange, 36 mm x 55 m | 24 | Roll |
| 7000088508 | 252548 | 3M [™] Performance Flatback Tape 2525, Orange, 48 mm x 55 m, 0.24 mm | 24 | Roll |

Scotch® Flatback Masking Tape 250

Apply Scotch® Flatback Masking Tape 250 as a quality control paint adhesion testing tape. It's ideal for bundling and wrapping applications. Our tape adheres in an instant, due to its high peel adhesion and strong flatback paper backing. Get clean removal from paint, plating and powder coatings.

0

- Get instant adhesion with an aggressive, pressure sensitive adhesive
- Use with ease due to controlled unwind and easy position and hand tear
- Remove cleanly from paint, plating and powder coatings

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000001488 | 25025 | Scotch® Flatback Masking Tape 250, Tan, 25 mm x 55 m, 0.15 mm | 36 | Roll |

Cloth & Duct Tapes

Focus

3M™ Super Duty Duct Tape DT17

Constructed of polyethylene film laminated to cloth with a synthetic/ natural rubber adhesive blend, this very thick and strong tape resists curling and tears off the roll cleanly even when used in the most demanding jobs. The 3M[™] Super Duty Duct Tape DT17 is designed to provide maximum-strength and is a long-lasting solution for high stress applications.

- Ultra-thick, water-resistant backing resists wear and abrasion while still tearing easily by hand
- Aggressive rubber adhesive grips instantly to a wide variety of surfaces, including metal, glass, plastic, and sealed concrete
- Tightly woven scrim provides high tensile strength, which is ideal for bundling applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100158390 | DT17BL4833IW | $3M^{\scriptscriptstyle \rm M}$ Super Duty Duct Tape DT17, Black, 48 mm x 32 m, 0.43 mm, Individually Wrapped | 24 | Roll |

Focus


3M[™] Heavy Duty Duct Tape DT11

Constructed of polyethylene film laminated to cloth with a synthetic/ natural rubber adhesive blend, this tough tape resists curling and tears off the roll cleanly for a variety of applications. The 3M[™] Heavy Duty Duct Tape DT11 is designed to provide a reliable solution for everyday challenges and adheres to numerous substrates, including plastic.



- Versatile with good hold for everyday use in challenging applications
- Sticks immediately and stays on irregular surfaces without lifting, even on most plastics
- Water-resistant polyethylene backing resists wear and light abrasion

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100158377 | DT11BL4855IW | 3M [™] Heavy Duty Duct Tape DT11, Black, 48 mm x 55 m, 0.28 mm, Individually Wrapped | 24 | Roll |
| 7100158346 | DT11SI4855IW | 3M™ Heavy Duty Duct Tape DT11, Silver, 48 mm x 55 m, 0.28 mm, Individually Wrapped | 24 | Roll |



3M[™] All Purpose Duct Tape DT8

Aggressive natural rubber adhesive provides instant adhesion to a wide variety of surfaces, including metal, glass, plastic, and sealed concrete

Purpose Duct Tape DT8 is designed to provide a versatile, conformable, and quick stick solution for deman-

- Woven cloth scrim allows tape to tear easily by hand and provides ease of application and handling
- Conformable backing is good for use on contoured surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100174105 | DT8BL4822IW | 3M [™] All Purpose Duct Tape DT8, Black, 48 mm x 23 m, 0.2 mm, Individually Wrapped | 24 | Roll |
| 7100174104 | DT8BL4855IW | 3M™ All Purpose Duct Tape DT8, Black, 48 mm x 55 m, 0.2 mm, Individually Wrapped | 24 | Roll |
| 7100158365 | DT8SI4822IW | 3M [™] All Purpose Duct Tape DT8, Silver, 48 mm x 23 m, 0.2 mm, Individually Wrapped | 24 | Roll |
| 7100158345 | DT8SI4855IW | 3M™ All Purpose Duct Tape DT8, Silver, 48 mm x 55 m, 0.2 mm, Individually Wrapped | 24 | Roll |

3M[™] Performance Plus Duct Tape 8979

3M[™] Performance Plus Duct Tape 8979 has a unique construction that allows for both permanent and temporary applications indoor and outdoor. It is removable with little or no adhesive residue from most opaque surfaces up to 6 months after application.

- Resists UV, sunlight, and weather to stay on for up to one year without deterioration
- Special adhesive sticks immediately and reliably long-term to most surfaces
- Protects against light abrasion including overspray from bead blasting, sand blasting, and shot peening

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 700001330 | 897948 | 3M [™] Performance Plus Duct Tape 8979, Blue, 48 mm x 55 m, 0.33 mm | 24 | Roll |
| 7000049207 | 897996 | 3M™ Performance Plus Duct Tape 8979, Blue, 96 mm x 55 m, 0.33 mm | 12 | Roll |


3M[™] Performance Plus Duct Tape 8979N

Seal, hold and protect with the highly specialised 3M[™] Performance Plus Duct Tape 8979N. Our tape is ideally suited for demanding applications in the nuclear power plant, ship building, and steel fabrication industries.

- Seal, hold and protect
- Get UV, curl, sunlight and weather resistance
- Remove cleanly from most opaque surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000049014 | 8979N48R | 3M™ Performance Plus Duct Tape 8979N, Nuclear, Red, 48 mm x 55 m, 0.307 mm | 24 | Roll |









Focus

3M™ Extra Heavy Duty Duct Tape 389

A polyethylene treated rayon cloth backing with synthetic rubber adhesive.

- Waterproof backing has good conformability and easy tear.
- Available in black or silver
- Good conformability



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000111478 | 389519 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 19 mm x 50 m | 48 | Roll |
| 7000111459 | 389525 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 25 mm x 50 m | 36 | Roll |
| 7000111460 | 389538 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 38 mm x 50 m | 24 | Roll |
| 7000111461 | 389550 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 50 mm x 50 m | 24 | Roll |
| 7000111462 | 389\$75 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 75 mm x 50 m | 12 | Roll |
| 7000111463 | 3895100 | 3M™ Extra Heavy Duty Duct Tape 389, Black, 100 mm x 50 m | 8 | Roll |
| 7000111477 | 389B50 | 3M™ Extra Heavy Duty Duct Tape 389, Blue, 50 mm x 50 m | 24 | Roll |
| 7000111490 | 389DB50 | 3M [™] Extra Heavy Duty Duct Tape 389, Blue, 50 mm x 50 m | 24 | Roll |
| 7000111487 | 389GR50 | 3M™ Extra Heavy Duty Duct Tape 389, Green, 50 mm x 50 m | 24 | Roll |
| 7000111474 | 389050 | 3M [™] Extra Heavy Duty Duct Tape 389, Olive, 38 mm x 50 m | 24 | Roll |
| 7000111473 | 389038 | 3M™ Extra Heavy Duty Duct Tape 389, Olive, 38 mm x 50 m | 24 | Roll |
| 7000111483 | 389R19 | 3M™ Extra Heavy Duty Duct Tape 389, Red, 19 mm x 50 m | 48 | Roll |
| 7000111484 | 389R25 | 3M™ Extra Heavy Duty Duct Tape 389, Red, 25 mm x 50 m | 1 | Roll |
| 7000111485 | 389R38 | 3M™ Extra Heavy Duty Duct Tape 389, Red, 38 mm x 50 m | 24 | Roll |
| 7000111486 | 389R50 | 3M™ Extra Heavy Duty Duct Tape 389, Red, 50 mm x 50 m | 24 | Roll |
| 7000111488 | 389R100 | 3M™ Extra Heavy Duty Duct Tape 389, Red, 100 mm x 50 m | 8 | Roll |
| 7000111480 | 3895119 | 3M [™] Extra Heavy Duty Duct Tape 389, Silver, 19 mm x 50 m | 1 | Roll |
| 7000111468 | 3895125 | 3M™ Extra Heavy Duty Duct Tape 389, Silver, 25 mm x 50 m | 36 | Roll |
| 7000111469 | 3895138 | 3M [™] Extra Heavy Duty Duct Tape 389, Silver, 38 mm x 50 m | 24 | Roll |
| 7000111470 | 38950SIL | 3M™ Extra Heavy Duty Duct Tape 389, Silver, 50 mm x 50 m | 24 | Roll |
| 7000111471 | 3895175 | 3M™ Extra Heavy Duty Duct Tape 389, Silver, 75 mm x 50 m | 1 | Roll |
| 7000111472 | 38951100 | 3M™ Extra Heavy Duty Duct Tape 389, Silver, 100 mm x 50 m | 8 | Roll |
| 7000111479 | 389W19 | 3M™ Extra Heavy Duty Duct Tape 389, White, 19 mm x 50 m | 1 | Roll |
| 7000111464 | 389W25 | 3M™ Extra Heavy Duty Duct Tape 389, White, 25 mm x 50 m | 36 | Roll |
| 7000111465 | 389W38 | 3M [™] Extra Heavy Duty Duct Tape 389, White, 38 mm x 50 m | 24 | Roll |
| 7000111466 | 389W50 | 3M [™] Extra Heavy Duty Duct Tape 389, White, 50 mm x 50 m | 24 | Roll |
| 7000111467 | 389W100 | 3M [™] Extra Heavy Duty Duct Tape 389, White, 100 mm x 50 m | 1 | Roll |
| 7000111475 | 389G25 | 3M [™] Extra Heavy Duty Duct Tape 389, Yellow, 25 mm x 50 m | 36 | Roll |
| 7000111476 | 389G50 | 3M™ Extra Heavy Duty Duct Tape 389, Yellow, 50 mm x 50 m | 24 | Roll |



Focus

3M[™] Vinyl Duct Tape 3903i

3M[™] Vinyl Duct Tape 3903i is a hand-tearable general purpose tape with a rubber adhesive and embossed vinyl backing. This tape is ideal for a variety of purposes including temporary repairs, identification, securing wiring, bundling, sealing, holding, protecting, and other jobs including applications requiring moisture resistance.

- Rubber adhesive sticks fast and stays on many surfaces, even irregular surfaces
- Embossed vinyl backing providing high elongation of 115%
- Temperature resistance up to 93°C



| Product ID | Part Number | Product Name | IVIUQ | 00 |
|------------|-------------|--|-------|------|
| 7100263682 | 3903BK50 | 3M™ Vinyl Duct Tape 3903i, Black, 50 mm x 50 m | 24 | Roll |
| 7100263680 | 390350 | 3M™ Vinyl Duct Tape 3903i, Silver, 50 mm x 50 m | 24 | Roll |
| 7100263681 | 3903W50 | 3M [™] Vinyl Duct Tape 3903i, White, 50 mm x 50 m | 24 | Roll |
| 7100263683 | 3903Y50 | 3M™ Vinyl Duct Tape 3903i, Yellow, 50 mm x 50 m | 24 | Roll |

3M[™] Heavy Duty Duct Tape 3939

3M[™] Heavy Duty Duct Tape 3939 has the tensile strength and adhesion for splicing, masking, patching, seaming, hanging poly sheeting, sealing PVC pipes, covering trip hazards, and a host of other industrial applications.



- Industrial-grade duct tape for splicing, masking, patching, sealing, and seaming
- High tensile strength for a secure hold under stress
- Thick rubber adhesive bonds to most rough and smooth surfaces for a tight seal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000028933 | 39394854 | 3M [™] Heavy Duty Duct Tape 3939, Silver, 48 mm x 55 m | 24 | Roll |

3M[™] Heavy Duty Duct Tape 2904

3M[™] Heavy Duty Duct Tape 2904 is a versatile, durable general purpose duct tape with high holding power and a broad attribute performance for demanding jobs. It is designed for general maintenance, bundling, wrapping, attaching, sealing, protecting, and colour coding. It is made of polyethylene film on canvas fabric and a synthetic rubber adhesive.



- Aggressive synthetic rubber adhesive provides instant adhesion to a wide range of surfaces
- Tears easily by hand in both directions
- Excellent conformability and high tensile strength, ideal for bundling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100098643 | 2904D4850B | 3M [™] Heavy Duty Duct Tape 2904, Black, 48 mm x 50 m | 24 | Roll |
| 7100098707 | 2904D4850S | 3M™ Heavy Duty Duct Tape 2904, Silver, 48 mm x 50 m | 24 | Roll |

3M[™] General Purpose Conformable Duct Tape 2903

Scotch® General Purpose Duct Tape 2903 is a versatile, canvas canvas made of polyethylene film on canvas fabric and a synthetic rubber finish. A good choice for general maintenance, bundling, wrapping, fastening, sealing and protection

- Aggressive synthetic rubber adhesive provides instant adhesion to a wide range of surfaces.
- Can be torn in hand and in both directions
- High tensile strength, ideal for bundling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100098695 | 2903B48 | 3M [™] General Purpose Conformable Duct Tape 2903, Black, 48 mm x 50 m | 24 | Roll |
| 7100098687 | 2903\$48 | 3M [™] General Purpose Conformable Duct Tape 2903, Silver, 48 mm x 50 m | 24 | Roll |

3M™ Value Duct Tape 1900

3M[™] Value Duct Tape 1900 is a cost-effective duct tape for utility and general use and lighter duty non-critical applications. It is a good toolbox tape for general applications including light-duty sealing, bundling, marking, and temporary repairs in non-critical applications. Its synthetic rubber adhesive sticks on contact to smooth metal, glass, plastic, sealed concrete and more, and the water-resistant polyethylene coating seals well in moist and humid environments.

- Silver polyethylene backing over cloth scrim resists moisture for reliable sealing performance in moist or humid environments
- Synthetic rubber pressure-sensitive adhesive sticks on contact to metal, glass, plastic, concrete, and other surfaces
- Surface readily accepts writing with markers for temporary labeling

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000071798 | 1900B50 | 3M [™] Value Duct Tape 1900, Black, 50 mm x 50 m | 24 | Roll |
| 7000071804 | 1900B75 | 3M [™] Value Duct Tape 1900, Black, 75 mm x 50 m | 18 | Roll |
| 7000032383 | 1900\$50 | 3M [™] Value Duct Tape 1900, Silver, 50 mm x 50 m | 24 | Roll |



Sealing Tapes

3M[™] Extreme Sealing Tape 4411N

From rain gutters to flashing and vents, rooftops to underground cable enclosures, 3M[™] Extreme Sealing tape 4411 ensures a quick and robust bond. It creates water tight seals and sticks on contact to numerous substrates without drying time, dripping, oozing or mess.

- Sticks on contact to many metals and plastics without drying time, dripping, oozing, or mess
- Provides immediate seal with no wait time or oozing associated with liquid sealants
- No sticky residue on hands

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7010300467 | 4411N38 | 3M™ Extreme Sealing Tape 4411N, Translucent , 38 mm x 4.5 m | 12 | Roll |
| 7100137182 | 4411N50ST | 3M [™] Extreme Sealing Tape 4411N, Translucent, 50 mm x 5.5 m, 1.0 mm, Blister IPC | 4 | Roll |
| 7000049661 | 4411N236 | 3M™ Extreme Sealing Tape 4411N, Translucent, 50 mm x 33 m, 1.0 mm | 6 | Roll |
| 7100084307 | 4411N121 | 3M™ Extreme Sealing Tape 4411N, Translucent, 121 mm x 33 m, 1.0 mm | 2 | Roll |
| 7100288968 | 4411N24 | 3M™ Extreme Sealing Tape 4411N, Translucent, 610 mm x 33 m, 1.0 mm | 1 | Roll |

3M[™] Extreme Sealing Tape 4411B

3M[™] Extreme Sealing Tape 4411B is a black, 1 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.

- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Black, 1 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100137163 | 4411B50ST | 3M™ Extreme Sealing Tape 4411B, Black, 50 mm x 5.5 m, 1.0 mm, Blister IPC | 4 | Roll |
| 7000049663 | 4411B2 | 3M™ Extreme Sealing Tape 4411B, Black, 50 mm x 33 m, 1.0 mm | 6 | Roll |
| 7100288972 | 4411B610 | 3M™ Extreme Sealing Tape 4411B, Black, 610 mm x 33 m, 1.0 mm | 1 | Roll |

3M[™] Extreme Sealing Tape 4411G

3M[™] Extreme Sealing Tape 4411G is a grey, 1 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.

- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Grey, 1 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049662 | 4411G236 | 3M™ Extreme Sealing Tape 4411G, Grey, 50 mm x 33 m, 1.0 mm | 6 | Roll |
| 7100289033 | 4411G610 | 3M™ Extreme Sealing Tape 4411G, Grey, 610 mm x 33 m, 1.0 mm | 1 | Roll |





3M™ Extreme Sealing Tape 4412

From rain gutters to flashing and vents, rooftops to underground cable enclosures, 3M™ Extreme Sealing Tape 4412 ensures a quick and robust bond. It creates water tight seals and sticks on contact to numerous substrates without drying time, dripping, oozing or mess.



- Sticks on contact to many metals and plastics without drying time, dripping, oozing, or mess
- Provides immediate seal with no wait time or oozing associated with liquid sealants
- No sticky residue on hands

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029082 | 4412N1 | 3M™ Extreme Sealing Tape 4412N, Translucent, 25 mm x 16.5 m, 2.0 mm | 9 | Roll |
| 7000021302 | 4412N2 | 3M [™] Extreme Sealing Tape 4412N, Translucent, 50 mm x 16.5 m, 2.0 mm | 6 | Roll |
| 7100002405 | 4412N75 | 3M™ Extreme Sealing Tape 4412N, Translucent, 75 mm x 16.5 m, 2.0 mm | 3 | Roll |
| 7000049564 | 44124 | 3M™ Extreme Sealing Tape 4412N, Translucent, 102 mm x 16.5 m, 2.0 mm | 2 | Roll |
| 7100289108 | 4412N24 | 3M™ Extreme Sealing Tape 4412N, Translucent, 610 mm x 16.5 m, 2.0 mm | 1 | Roll |

3M™ Extreme Sealing Tape 4412G

3M[™] Extreme Sealing Tape 4412G is a grey, 2.0 mm thick, highly conformable, single-side acrylic tape with a high performance ionomer backing. Our tape was specifically designed to give you professional results under outdoor exposure to direct sunlight, as well as temperature and humidity extremes while creating an effective seal over an existing joint, seam, or penetration.

- Very good resistance to many common industrial solvents as well as elevated temperature exposure
- Tacky adhesive sticks on contact for immediate bond with no drying time, oozing, or clean up
- Grey, 2 mm thick, conformable tape forms effective seals over contours, edges, rivets, and screw heads

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000047348 | 4412G50 | 3M™ Extreme Sealing Tape 4412G, Grey, 50 mm x 16.5 m, 2.0 mm | 216 | Roll |
| 7100289034 | 4412G610 | 3M [™] Extreme Sealing Tape 4412G, Grey, 610 mm x 16.5 m, 2.0 mm | 1 | Roll |

3M™ Fast Ultra Conformable Tape 8045P

3M[™] Ultra Conformable 8045P is a very stretchy and conformable tape, which allows to seal challangeing flashing details. Due to its unique technical properties 3M[™] Ultra Conformable 8045P seals much faster than using conventional flashing tapes.



- The conformability and elongation properties of the 8045P Ultra Conformable tape, allows much faster and safer sealing of challenging applications
- Due to the self bonding capabilities, it creates very strong seams
- Adhesive system allows primerless application on a lot of common building substrates

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------------|---|-----|------|
| 7100108888 | 8045P60 | 3M [™] Fast Ultra Conformable Tape 8045P, Grey, 60 mm x 25 m, 1.1 mm | 5 | Roll |
| 7100108714 | 8045P150 | 3M [™] Fast Ultra Conformable Tape 8045P, Grey, 150 mm x 25 m, 1.1 mm | 2 | Roll |
| 7100108887 | 8045P200 | 3M [™] Fast Ultra Conformable Tape 8045P, Grey, 200 mm x 25 m, 1.1 mm | 6 | Roll |
| 7100101074 | 8045FAST-UC1210X25 | 3M [™] Fast Ultra Conformable Tape 8045P, Grey, 1210 mm x 25 m, 1.1 mm | 1 | Roll |



3M[™] Flexible Air Sealing Tape 8067E - FAST F

3M™ Flexible Air Sealing Tape 8067E FAST-F is our self-adhered, waterproof flashing tape designed for sealing around openings and joints in building applications e.g. penetrations in exterior walls.

- Resists UV exposure for up to 6 months
- Proprietary film backing seals around nails and staples to prevent moisture intrusion (passed ASTM 1970)
- No adhesive melting or staining in summer heat

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|---|-----|------|
| 7100086951 | 8067E50X25 | 3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 50 mm x 25 m, 0.25 mm | 24 | Roll |
| 7100086954 | 80676012 | 3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 60 mm x 25 m, 0.25 mm | 20 | Roll |
| 7100086952 | 8067E60X25 | 3M [™] Flexible Air Sealing Tape 8067E - FAST F, Tan, 60 mm x 25 m, 0.25 mm, 30-30 Single Split | 20 | Roll |
| 7100135038 | 8067E75X25FASTF | 3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 75 mm x 25 m, split liner | 16 | Roll |
| 7100086953 | 806710025 | 3M™ Flexible Air Sealing Tape 8067E - FAST F, Tan, 100 mm x 25 m, 0.25 mm, 50-50 Split | 12 | Roll |

3M[™] Flexible Air Sealing Tape 8068E - FAST G

3M™ Flexible Air Sealing Tape 8068E - FAST G is an air, vapour, moisture and water impermeable tape with an aggressive, high-tack pressure sensitive acrylic adhesive with reinforcing grid. Our tape is self-wound. It is hand tearable and used in a variety building and construction applications.

- Resists UV exposure for up to 6 months
- Proprietary film backing seals around nails and staples to prevent moisture intrusion (passed ASTM 1970)
- No adhesive melting or staining in summer heat

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|--|-----|------|
| 7100027085 | | $3 M^{\scriptscriptstyle \rm M}$ Flexible Air Sealing Tape 8068E - FAST G, Tan, 50 mm x 25 m, 1.3 mm | 24 | Roll |
| 7100027084 | 8068E60X25NOLINER | 3M™ Flexible Air Sealing Tape 8068E - FAST G, Tan, 60 mm x 25 m, 1.3 mm | 20 | Roll |

3M[™] Flexible Air Sealing Tape 8069E

3M™ Flexible Air Sealing Tape 8069E - FAST D is an air, moisture and water impermeable tape with an aggressive, high-tack acrylic pressure sensitive adhesive. Our double-sided tape enables nail-free, airtight adhesion vapour-retardant membranes to plaster both inside and out.

- Resists UV exposure for up to 6 months
- No adhesive melting or staining in summer heat
- Polyethylene red release liner allows for ease of use and application







3M[™] Sealing and Holding Tape 8069

3M[™] Sealing and Holding Tape 8069E is a double sided tape with a tough, conformable carrier and aggressive acrylic adhesive for sealing and holding to difficult-to-stick-to surfaces under a variety of conditions.



- Offers aggressive, quick sticking adhesive for fast and sure holding
- Adheres to a wide variety of difficult-to-stick-to surfaces such as concrete, wood, and plastic sheeting
- Polyethylene red release liner allows for ease of use and application


| Product ID | Part Number | Product Name | MOQ | OU |
|------------|------------------------|--|-----|------|
| 7100087076 | 8069EFAST- DAT50X25 | 3M [™] Flexible Air Sealing Tape 8069E - FAST D, Silver, 50 mm x 25 m, 0.410 mm | 6 | Roll |
| 7100089779 | 8069E1220X50 | 3M [™] Flexible Air Sealing Tape 8069E - FAST D, Silver, 1220 mm x 50 m, 0.410 mm | 1 | Roll |



3M[™] Cushion-Mount[™] Plate Mounting Tapes

Let us find a tape that meets the demands of your craft.

One of the make-or-break decisions of the flexographic craft is which mounting tape to use. With a full suite of options and decades of industry experience behind us, you can depend on 3M to help you to match a tape to the job at hand.

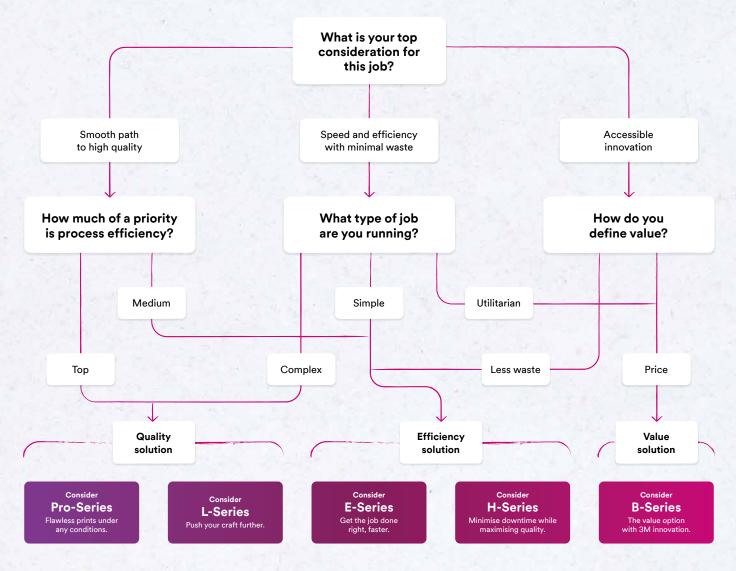

Contact our passionate pros to get help selecting the perfect match.

Product selection and use: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.

3M United Kingdom PLC 3M Centre Cain Road Bracknel RG12 8HT 3M Ireland Limited The Iveagh Building Carrickmines Park Carrickmines Dublin 18

© 3M 2022. All rights reserved. 3M and Cushion-Mount are trademarks of 3M Company. OMG275511.

Where Science Meets Craft

Splicing & Tabbing Tapes

3M[™] Splittable Flying Splice Tape 8387

3M™ Splittable Flying Splice Tape 8387 is our 7 mil double coated film tape that separates into two single sided tapes.

- Purple, 7 mil thick film backing, splittable flying splice tape
- Fibre free splittable flying splice tape with a film backing and excellent adhesion for splicing to a variety
 of substrates, including low surface energy films. Tape splits into a pink layer and a grey layer to identify
 splice components
- Reliable splitting mechanism ensures consistent results

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100044924 | 718628 | 3M [™] Splittable Flying Splice Tape 8387, Purple, 50 mm x 50 m, 0.19 mm | 24 | Roll |

3M[™] Repulpable Flatback Tape R3127

3M[™] Repulpable Flat Backed Tape R3127 is our thin repulpable web processing tape available in blue, white, kraft and red. The backing of this tape contains a thin silicon release coating to eliminate the need for a liner and is therefore not printable.

- 4.5 mil, extensible paper backing, single sided tape, excellent heat resistance up to 176.67 °C
- Thin, strong, conformable backing for core starting, tabbing, and roll closing, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100027855 | R312736 | 3M [™] Repulpable Flatback Tape R3127, White, 36 mm x 55 m, 0.11 mm | 24 | Roll |
| 7100027856 | R312748 | 3M [™] Repulpable Flatback Tape R3127, White, 48 mm x 55 m, 0.11 mm | 24 | Roll |

3M[™] Repulpable Strong Single Coated Tape R3187

3M[™] Repulpable Strong Single Coated Tape R3187 is our repulpable bleached high strength extensible kraft paper backing, coated with a high tack transparent repulpable adhesive. Available in blue, white, kraft, and black coloured backings.

- •7.5 mil, extensible paper backing, single sided tape, excellent heat resistance up to 176.67 °C
- Super strong backing for core starting, tabbing, and roll closing, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100028023 | R31874855 | $3 M^{\scriptscriptstyle \rm M}$ Repulpable Strong Single Coated Tape R3187, Blue, 48 mm x 55 m, 0.19 mm | 24 | Roll |



3M[™] Repulpable Double Coated Tape R3227

3M[™] Repulpable Web Processing Double Coated Tape R3227 is our repulpable web processing double coated tape with high shear properties. A tissue paper tape available in blue and white and supplied on a kraft liner.



- 3.0 mil, tissue backing, double sided tape, excellent heat resistance up to 176.67 °C
- Thin, strong, conformable backing for core starting, tabbing, roll closing, and zero speed splicing at the sheeter, good for a wide variety of papers and temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100028055 | R3227BL24 | 3M [™] Repulpable Double Coated Tape R3227, Blue, 24 mm x 55 m, 0.09 mm | 36 | Roll |
| 7100279680 | R322718 | 3M™ Repulpable Double Coated Tape R3227, White, 18 mm x 55 m, 0.13 mm | 48 | Roll |

3M[™] Splicing System with Built-in Sensor R9990

3M™ Splicing System with Built-in Sensor R9990 is our double coated tape laminate with a low release split liner and a metalised layer for auto sensing and splice detection applications.

- Reliable splicing operation
- Quick and easy splices
- Coatable and printable

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116521 | R9990375 | 3M [™] Splicing System With Built-In Sensor R9990, Blue, 37.5 mm x 33 m, 0.07 mm | 12 | Roll |

3M[™] Repulpable Splicing System 9990N

The 3M[™] Repulpable Splicing System 9990N is our double coated, splittable tape construction featuring an acrylic adhesive and an easy release paper liner, with liner scored for easy manual application and built-in sensor layer.



- Designed for straight line flying splices
- Easy release paper liner
- Built-in aluminium sensor

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116530 | 534282 | 3M [™] Repulpable Splicing System 9990N, Blue, 37.5 mm x 33 m, 0.09 mm | 12 | Roll |
| 7000116528 | EE66250 | 3M [™] Repulpable Splicing System 9990N, Blue, 50 mm x 33 m, 0.09 mm | 8 | Roll |
| 7000116531 | 535642 | 3M [™] Repulpable Splicing System 9990N, Blue, 50 mm x 100 m, 0.09 mm | 5 | Roll |



3M[™] Repulpable Splicing System R9996

3M™ Repulpable Splittable Flying Splice Tape R9996 is our double coated, repulable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for a wide range of paper, performs well over a wide range of temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116517 | R999650 | 3M [™] Repulpable Splicing System R9996, Blue, 50 mm x 55 m, 0.07 mm | 18 | Roll |
| 7000116516 | R999675 | 3M [™] Repulpable Splicing System R9996, Blue, 75 mm x 55 m, 0.07 mm | 12 | Roll |

3M[™] Repulpable Splicing System R9993

3M[™] Repulpable Splittable Flying Splice Tape R9993 is our double coated, repulable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for newsprint papers, performs well at cold temperatures, quick stick
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042417 | R999337 | 3M [™] Repulpable Splicing System R9993, Blue, 37.5 mm x 33 m, 0.07 mm | 12 | Roll |
| 7000043744 | R999350 | 3M [™] Repulpable Splicing System R9993, Blue, 50 mm x 33 m, 0.07 mm | 6 | Roll |

3M[™] Repulpable Flying Splice Tape 9353

3M[™] Repulpable Flying Splice Tape 9353 is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable), with liner score for easy manual application.



- Flying splice of paper webs in newsprint, offset litho, gravure and flexographic printing processes
- The splittable layer has been modified to provide a lower overall splitting force for improved splice reliability on belt driven presses
- This product can also be used on core driven presses

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100080092 | 753235 | 3M [™] Repulpable Flying Splice Tape 9353, Blue, 37 mm x 33 | 12 | Roll |
| 7100079680 | 753236 | 3M [™] Repulpable Flying Splice Tape 9353, Blue, 50 mm x 33 m | 8 | Roll |
| 7100080096 | 753255 | 3M [™] Repulpable Flying Splice Tape 9353, Blue, 50 mm x 33 m | 16 | Roll |

3M[™] Splittable Flying Splice Tape 9356

3M[™] Splittable Flying Splice Tape 9356 is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable), with liner score for easy manual application.

- Flying splice of paper webs on an off-machine coater or on core driven printing presses
- Not intended for use on belt driven printing presses
- Reliable splitting mechanism ensures consistent results

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100080100 | 753238 | 3M [™] Splittable Flying Splice Tape 9356, Blue, 50 mm x 55 m | 16 | Roll |
| 7100080101 | 753239 | 3M™ Splittable Flying Splice Tape 9356, Blue, 60 mm x 55 m | 16 | Roll |

3M[™] Repulpable Flying Splice Tape 9351AL

3M[™] Repulpable Flying Splice Tape 9351AL is our double coated, splittable tape construction designed for straight line flying splices, furnished with repulpable acrylic adhesive on both sides and an easy release paper liner (also repulpable).

- Good shear for both cold set newsprint, and heat set commercial printing processes
- Liner score for easy manual application
- Improved splice reliability on belt driven presses

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100079530 | 753227 | 3M [™] Repulpable Flying Splice Tape 9351AL, Blue, 37 mm x 33 m, 0.10 mm | 12 | Roll |
| 7100080091 | 753229 | 3M [™] Repulpable Flying Splice Tape 9351AL, Blue, 50 mm x 33 m, 0.10 mm | 8 | Roll |

3M[™] Repulpable Splicing System R9999

3M[™] Repulpable Splittable Flying Splice Tape R9999 is our double coated, repulpable splicing system with a low release split liner for use in flying splice tape applications.

- Blue splicing side 4.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 204 °C
- Straight across flying paster for a wide range of paper, performs well over a wide range of temperatures
- Repulpable adhesive prevents broke contamination from non-repulpable splice material

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116515 | R9999755 | 3M [™] Repulpable Splicing System R9999, Blue, 75 mm x 55 m, 0.12 mm | 12 | Roll |





3M[™] Repulpable Splicing System 9993

3M™ Repulpable Single Coated Splicing Tape 9993N is a double coated, repulpable splicing tape with a low release split liner.

- Blue splicing side 2.5 mil, clear tabbing side 2.2 mil, double sided splittable tape, easy release kraft split liner, excellent heat resistance up to 400F
- Straight across flying paster for newsprint papers, performs well at cold temperatures, quick stick
- Repulpable adhesive prevents broke contamination from non-repulpable splice material, meets or exceeds TAPPI UM-213, procedure A, FDA compliant 21 CFR 176.170 (components of paper and paperboard in contact with aqueous and fatty food)

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116511 | 9993N50 | 3M [™] Repulpable Splicing System 9993N, Silver, 50 mm x 33 m, 0.07 mm | 8 | Roll |

3M[™] Double Coated Tape 9737 Red

3M[™] Double Coated Tape 9737 Red is a double-sided tape mounted on a thin polyester carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- \bullet High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000049265 | 9737R48 | 3M [™] Double Coated Tape 9737R, Red, 48 mm x 55 m, 0.09 mm | 24 | Roll |

3M[™] Double Coated Tape 9737 Clear

3M[™] Double Coated Tape 9737 Red is a double-sided tape mounted on a thin polyester carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029048 | 9737CL48 | 3M [™] Double Coated Tape 9737, Clear, 48 mm x 55 m, 0.09 mm | 24 | Roll |








3M[™] Double Coated Tape 9738 Red

3M[™] Double Coated Tape 9738 Red is a double-sided tape mounted on a non-woven tissue carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on a 55 lb. densified kraft paper liner for easy release and manipulation during application.



- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000049277 | 9738R24 | 3M [™] Double Coated Tape 9738R, Red, 24 mm x 55 m, 0.09 mm | 48 | Roll |
| 7000029050 | 973848 | 3M [™] Double Coated Tape 9738R, Red, 48 mm x 55 m, 0.09 mm | 24 | Roll |

3M[™] Double Coated Tape 9738 Clear

3M[™] Double Coated Tape 9738 Red is a double-sided tape mounted on a non-woven tissue carrier with a pressure sensitive acrylic adhesive that offers a balance of high initial adhesion and good holding power. It is mounted on a 55 lb. densified kraft paper liner for easy release and manipulation during application.

- Ideal performance in high speed splicing applications
- High tack acrylic adhesive performs well across broad temperature range
- Excellent peel, tack and shear strength to withstand rigorous splicing applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029049 | 9738CL48 | 3M [™] Double Coated Tape 9738, Clear, 48 mm x 55 m, 0.09 mm | 24 | Roll |



Flexographic Plate Mounting Tapes



3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1720

Mount your photopolimer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1720. Our 0.51 mm teal, double coated foam tape has the air release feature and is tolerant to ink contaminates allowing for easy and clean plate removal. It is used for combination where more solids exist.

- Teal, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminates allowing for easy and clean plate removal
- 0.51 mm thickness
- Medium firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100136620 | L1720457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1720, Blue, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100136621 | L1720 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1720, Blue, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1520

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1520. Our 0.51 mm purple, double coated foam tape has the air release feature and is tolerant to ink contaminates allowing for easy and clean plate removal. It is used for combination.



• Purple, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminates allowing for easy and clean plate removal

- 0.51 mm thickness
- Medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100136558 | L1520457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1520, Purple, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100136285 | L15201372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1520, Purple, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1020

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1020. Our 0.51 mm white, double coated foam tape has the air release feature and is tolerant to ink contaminates allowing for easy and clean plate removal. It is used for combination jobs.



- White, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminates allowing for easy and clean plate removal
- 0.51 mm thickness
- Standard density

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100136273 | L1020WH457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1020, White, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100136272 | L10205425 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1020, White, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1320

Mount your photopolimer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1320. Our 0.51 mm yellow, double coated foam tape has the air release feature. It is tolerant to ink contaminates allowing for easy and clean plate removal, and is used for combination (halftone exceed solids).



- Yellow, flexo plate mounting tape has the air release feature adhesive, which is tolerant to ink contaminates allowing for easy and clean plate removal
- 0.51 mm thickness
- Medium soft

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100136278 | L1320457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1320, Yellow, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100136277 | L1320 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1320, Yellow, 1372 mm x 23 m, 0.5 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1920

Mount your photopolimer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape L1920. Our 0.51 mm pink, double coated foam tape has the air release feature. It is tolerant to ink contaminates allowing for easy and clean plate removal, and is used for high speed when process/halftone images dominate.



- 0.51 mm thickness
- Light medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100136283 | L1920457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1920, Light Pink, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100137064 | L19201372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape L1920, Light Pink, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1820

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1820. Our 0.51 mm blue, double coated foam tape has the air release feature with easy plate side removal. It is used for plates that contain mostly solids in a combination of solid and halftone images.



- Blue, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042365 | E182018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1820, Blue, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042366 | E1820137 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1820, Blue, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1720

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1720. Our 0.51 mm teal, double coated foam tape has the air release feature with easy plate side removal. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042363 | E172018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1720, Teal, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042364 | E172054 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1720, Teal, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1520

Mount your photopolimeric plate to print cylinders with 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1520. Our 0.51 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing with fine type reverses and expanded colour gamut.

- Purple, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100009003 | E152018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1520, Purple, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042352 | E152054 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1520, Purple, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1020

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1020. Our 0.51 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.



- White, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Standard density

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042356 | E102018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1020, White, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042377 | E102054 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1020, White, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus


3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1320

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1320. Our 0.51 mm yellow, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing of combination work when halftone areas exceed solids.



- Yellow flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Medium soft

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042383 | E132018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1320, Yellow, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042382 | E132054 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1320, Yellow, 1372 mm x 23 m, 0.5 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1920

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1920. Our 0.51 mm pink, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Light medium

| 10 D |
|------|

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042368 | E192018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1920, Pink, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042367 | 192054 | 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1920, Pink, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1220

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1220. Our 0.51 mm orange, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed process work.



- Orange, flexo plate mounting tape with air release feature
- 0.51 mm thickness
- Light

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042756 | E122018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1220, Orange, 457 mm x 23 m, 0.51 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1120

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1120. Our 0.51 mm tan, double coated foam tape has the air release feature with easy plate side removal. It is used for high quality process printing.

- Tan, flexo plate mounting tape with air release feature adhesive
- 0.51 mm thickness
- Soft/Process

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042361 | E112018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1120, Tan, 457 mm x 23 m, 0.05 mm | 1 | Roll |
| 7000042362 | E112054 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1120, Tan, 1372 mm x 23 m, 0.05 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1520

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1520 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This purple plate mounting sticky back foam tape provides high quality medium combination print.

- 0.51 mm double coated medium density purple foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100247164 | B1520457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1520, Purple, 457 mm x 33 m, 0.51 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1020

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1020 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This white plate mounting sticky back foam tape provides high quality standard combination print.

- 0.51 mm double coated standard density white foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100247251 | B1020457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1020, White, 457 mm x 33 m, 0.51 mm | 1 | Roll |
| 7100247250 | B10201372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1020, White, 1371 mm in x 33 m, 0.51 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1320

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1320 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This yellow plate mounting sticky back foam tape provides high quality medium soft combination print.

- 0.51 mm double coated medium soft density yellow foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100246871 | B1320457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1320, Yellow, 457 mm x 33 m, 0.51 mm | 1 | Roll |
| 7100247163 | B13201372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1320, Yellow, 1371 mm in x 33 m, 0.51 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1920

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape B1920 is designed for mounting flexographic print plates to cylinders or sleeves, particularly the price-conscious challenges of short runs and frequent changeovers. This pink plate mounting sticky back foam tape provides high quality light medium combination print.

- 0.51 mm double coated light medium density pink foam tape
- Designed to meet basic print needs for short runs and frequent changeovers
- Ideal for printing combinations of solids and process with halftone dots

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100247165 | 21920457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1920, Pink, 457 mm x 33 m, 0.51 mm | 1 | Roll |
| 7100247166 | B19201372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape B1920, Pink, 1371 mm in x 33 m, 0.51 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1820H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1820H. Our 0.51 mm blue, double coated foam tape which has the air release feature with high plate side adhesion. It is used for plates that contain mostly solids in a combination of solid and halftone images.

- Blue, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000115982 | E1820H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1820H, Blue, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042388 | E1820H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1820H, Blue, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1720H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1720H. Our 0.51 mm teal, double coated foam tape has the air release feature with high plate side adhesion. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042372 | E1720H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1720H, Teal, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042369 | E1720H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1720H, Teal, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1520H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1520H. Our 0.51 mm purple, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing with fine type reverses and expanded colour gamut.

- Purple, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042386 | E1520H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1520H, Purple, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042385 | E1520H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1520H, Purple, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1020H

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1020H. Our 0.51 mm white, double coated foam tape has the air release feature with high plate side adhesion. It is used for high guality combination jobs.

- White, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Standard density

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042357 | E1020H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1020H, White, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7000042358 | E1020H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1020H, White, 1372 mm x 23 m, 0.5 mm | 1 | Roll |


Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1320H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1320H. Our 0.51 mm yellow, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Medium soft

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100152066 | E1320H457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1320H, Yellow, 457 mm x 23 m, 0.5 mm | 3 | Roll |
| 7000042370 | E1320H54 | $3M^{\rm \tiny M}$ Cushion-Mount $^{\rm \tiny M}$ Plus Plate Mounting Tape E1320H, Yellow, 1372 mm x 23 m, 0.5 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1920H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1920H. Our 0.51 mm pink, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Light medium

| n. | |
|----|--|
| | |
| | |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100152422 | E1920MNT457 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1920H, Purple, 457 mm x 23 m, 0.5 mm | 1 | Roll |
| 7100152421 | E1920H1372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1920H, Purple, 1372 mm x 23 m, 0.5 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1120H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1120H. Our 0.51 mm tan, double coated foam tape has the air release feature with high plate side adhesion. It is used for high quality process printing.


- (C) = C)
- Tan flexo plate mounting tape has air release feature with high plate side adhesion
- 0.51 mm thickness
- Soft/Process

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042749 | E1120H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1120H, Tan, 457 mm x 23 m, 0.05 mm | 1 | Roll |
| 7000042750 | E1120H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1120H, Tan, 1372 mm x 23 m, 0.05 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1815

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1815. Our 0.38 mm blue, double coated foam tape has the air release feature with easy plate side removal. It is used for plates that contain mostly solids in a combination of solid and halftone images.




- Blue, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042745 | E181518 | $3M^{\scriptscriptstyle \rm T\!M}$ Cushion-Mount $^{\scriptscriptstyle \rm T\!M}$ Plus Plate Mounting Tape E1815, Blue, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7100011658 | E181554 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1815, Blue, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1715

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1715. Our 0.38 mm teal, double coated foam tape has the air release feature with easy plate side removal. It is used when you have slightly more solids in a combination of solid and halftone printing.



- 0.38 mm thickness
- Medium firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042371 | E171518 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1715, Teal, 457 mm x 23 m, 0.38 mm | 3 | Roll |
| 7000042375 | E17151372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1715, Teal, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1515

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1515. Our 0.38 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing with fine type reverses and expanded colour gamut.

- Purple, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000047429 | 707960 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1515, Purple, 457 mm x 23 m, 0.38 mm | 3 | Roll |
| 7000047430 | 708024 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1515, Purple, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1015

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1015. Our 0.38 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.

- White, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Standard density

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042350 | E101518 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1015, White, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7000042353 | E101554 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1015, White, 1372 mm x 23 m, 0.38 mm | 1 | Roll |





Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1315

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1315. Our 0.38 mm yellow, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow flexo plate mounting tape provides air release feature
- 0.38 mm thickness
- Medium soft

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042752 | E131518 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1315, Yellow, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7000042753 | E131554 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1315, Yellow, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1915

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1915. Our 0.38 mm pink, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed when process and halftone images predominate.

- Pink, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Light medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042376 | E191554 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1915, Pink, 1372 mm x 23 m, 0.38 mm | 1 | Roll |
| 7000042373 | E191518 | 3M™ Cushion-Mount™ Plus Plate Mounting Tape E1915, Tan, 457 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1215

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1215. Our 0.38 mm orange, double coated foam tape has the air release feature with easy plate side removal. It is used for high speed process work.



- Orange, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Light

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000029057 | E12151372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1215, Orange, 1372 mm x 23 m | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1115

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1115. Our 0.38 mm tan, double coated foam tape has the air release feature with easy plate side removal. It is used for high quality process printing.



- Tan, flexo plate mounting tape with air release feature adhesive
- 0.38 mm thickness
- Soft/Process

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000042360 | E111518 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1115, Tan, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7000042359 | E111554 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1115, Tan, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1815H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1815H. Our 0.38 mm blue, double coated foam tape has the air release feature with high plate side adhesion. It is used for plates that contain mostly solids in a combination of solid and halftone images.

- Blue, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Firm

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000047423 | E1815H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1815H, Blue, 457 mm x 23 m, 0.38 mm | 3 | Roll |
| 7000042748 | E1815H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1815H, Blue, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1715H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1715H. Our 0.38 mm teal, double coated foam tape has the air release feature with high plate side adhesion. It is used when you have slightly more solids in a combination of solid and halftone printing.



- Teal, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Medium firm


| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000047426 | E1715H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1715H, Teal, 1372 mm x 23 m, 0.38 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1515H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1515H. Our 0.38 mm purple, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing with fine type reverses and expanded colour gamut.



- 0.38 mm thickness
- Medium

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000047431 | E1515H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1515H, Purple, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7000042755 | E1515H54 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1515H, Purple, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1315H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1315H. Our 0.38 mm yellow, double coated foam tape has the air release feature with high plate side adhesion. It is used for high speed printing of combination work when halftone areas exceed solids.

- Yellow, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Medium soft

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000122466 | E1315H54 | $3M^{\mathbb{M}}$ Cushion-Mount $^{\mathbb{M}}$ Plus Plate Mounting Tape E1315H, Yellow, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1115H

Mount your photopolymer plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1115H. Our 0.38 mm tan, double coated foam tape has the air release feature with high plate side adhesion. It is used for high quality process printing.



- Tan, flexo plate mounting tape has air release feature with high plate side adhesion
- 0.38 mm thickness
- Soft/Process


| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000115869 | E1115H18 | $3M^{ \!$ | 3 | Roll |
| 7000042374 | E1115H1372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1115H, Tan, 1372 mm x 23 m, 0.38 mm | 1 | Roll |



Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1015H

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1015H. Our 0.38 mm white, double coated foam tape has the air release feature with high plate side adhesion. It is used for combination jobs.



- 0.38 mm thickness
- Standard density

| eature with high plate side adhesion | | |
|--------------------------------------|-----|----|
| | MOQ | OU |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000042354 | E1015H18 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1015H, White, 457 mm x 23 m, 0.38 mm | 1 | Roll |
| 7100152063 | E1015H1372 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1015H, White, 1372 mm x 23 m, 0.38 mm | 1 | Roll |

Focus

3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1040

Mount your photopolimeric plate to print cylinders with 3M[™] Cushion-Mount[™] Plus Plate Mounting Tape E1040. Our 1.02 mm white, double coated foam tape has the air release feature with easy plate side removal. It is used for combination jobs.



- White, flexo plate mounting tape with air release feature adhesive
- 1.02 mm thickness
- Standard density

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000049173 | E104018 | 3M [™] Cushion-Mount [™] Plus Plate Mounting Tape E1040, White, 457 mm x 15.2 m, 1.0 mm | 1 | Roll |

uumm.

Packaging Tapes

Scotch® Pouch Tape 8241

Performance document control (pouch) tape on a roll.

- Bright orange border on all four sides and a transparent non-sticky rectangular window
- Safe application of packing slips and other documents to a wide variety of boxes and packaging
- Protects the document and tracks the package



| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100160307 | 8241150 | Scotch® Pouch Tape 8241, Transparent, 150 mm x 66 m, 0.046 mm | 12 | Roll |

3M[™] Carry Handle 8330

Our 3M[™] Carry Handle 8330 transforms almost anything into a convenient, travel-friendly package. A durable plastic strip with adhesive at each end for adhering to both sides of a box or package creates a small padded loop which can support lifting of heavy & bulky products.

- Transform bulky purchases into travel-friendly packages
- Carry handles are easily applied at retail checkout
- Customize these handles with up to six colours for special promotions or UPC codes to spread the word about your business

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100054963 | 8330W | 3M [™] Carry Handle Tape 8330, White, 35 mm x 584 mm x 152 mm | 1 | Case |

3M[™] Carry Handle 8310

Our 3M[™] Carry Handle 8310 transforms almost anything into a convenient, travel-friendly package. A durable plastic strip with adhesive at each end for adhering to both sides of a box or package creates a small loop which can support up to 10 pounds.

- Transform bulky purchases into travel-friendly packages
- Carry handles are easily applied at retail checkout and can support up to 10 pounds
- Customize these handles with up to six colors for special promotions or UPC codes to spread the word about your business

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100049685 | 695826 | $3M^{\mathbb{M}}$ Carry Handle 8310, White, 25 mm x 432 mm x 76 mm | 1 | Case |

3M[™] Carry Handle Tape 9009HP

3M[™] Carry Handle Tape 9009HP is a high performance tape featuring a durable ScotchPro[™] film backing that is very strong in longitudinal direction and agressive hot melt solvent-free adhesive, designed for use on automatic in-line and post oven carry handle applications.

- Designed for use on automatic in-line and post oven carry handle applications
- High Tensile Strength Mono-axially oriented polypropylene backing and specially formulated adhesive
- Excellent adhesion to most shrink film over wraps securing immediate and secure handle attachment

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095581 | 900925 | 3M [™] Double Coated Tape 9009HP, Transparent, 25 mm x 6500 m | 1 | Roll |

Box Sealing Tapes



Scotch® High Tack Box Sealing Tape 375+

Scotch® High Tack Box Sealing Tape 375+ is a high-performance packaging tape that securely closes a variety of heavy weight box materials, including recycled fiberboard. The strong adhesive securely seals packages to help prevent tampering and tape failure during moving, shipping and delivery. The polypropylene film backing is easy to unwind and resists abrasion, moisture, scuffing and edge tear.



- High-performance hot melt packaging tape for heavy duty applications
- Strong adhesive helps prevent tampering and tape failure during shipping and delivery
- High edge tear and split resistance for e-commerce and single-parcel shipments

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100216187 | 37572914 | Scotch® High Tack Box Sealing Tape 375+, Clear, 72 mm x 914 m | 4 | Roll |
| 7100215092 | 3754850 | Scotch® High Tack Box Sealing Tape 375+, Transparent, 48 mm x 50 m | 36 | Roll |
| 7100215511 | 37548914 | Scotch® High Tack Box Sealing Tape 375+, Transparent, 48 mm x 914 m | 6 | Roll |
| 7100215467 | 3757250 | Scotch® High Tack Box Sealing Tape 375+, Transparent, 72 mm x 50 m | 24 | Roll |

Scotch® High Performance Box Sealing Tape 3705

Make your boxes and packages even more secure with Scotch® High Performance Box Sealing Tape 3705. Our super strength box sealing tape features an extremely strong bi-axially oriented polypropylene strong film backing and a very high shear/tack solvent based natural rubber resin adhesive.

- Protect your valuable and fragile goods
- Use in a wide range of demanding packaging applications
- Reduce the risk of product damage or box sealing failures

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095271 | 3705T50 | Scotch® High Performance Box Sealing Tape 3705, Transparent, 50 mm x 66 m | 36 | Roll |

Scotch® High Performance Box Sealing Tape 375E

Seal a variety of boxes and cartons, including those with high recycled content using Scotch® High Performance Box Sealing Tape 375E. Our tape has hot melt solvent free (synthetic rubber resin) adhesive and polypropylene film backing that resists splitting and absorbs impact shock, when subjected to rough handling.



- Absorbs impact shock
- Get high moisture, abrasion and split resistance
- Use on over-packed and heavy-weight packages for a tight seal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095715 | 375E50 | Scotch® High Performance Box Sealing Tape 375E, Brown, 50 mm x 66 m | 36 | Roll |
| 7000095896 | 375E75 | Scotch® High Performance Box Sealing Tape 375E, Brown, 75 mm x 66 m | 24 | Roll |
| 7000095434 | 375T5099 | Scotch® High Performance Box Sealing Tape 375E, Transparent, 50 mm x 990 m | 6 | Roll |
| 7000095437 | 375T7566 | Scotch® High Performance Box Sealing Tape 375E, Transparent, 75 mm x 66 m | 24 | Roll |

Scotch® Box Sealing Tape 313

Scotch® Box Sealing Tape 313 closes a wide variety of medium weight box materials securely, including recycled liner paper and fibreboard. The backing of this value performance tape is crafted from polypropylene making it easy to handle and conformable around edges and on rough surfaces for a tight seal. The tape with-stands cold temperatures and works well on boxes weighing up to 30 kg.

- High adhesion and holding power resists popping for a secure seal
- Suitable for hard to stick to surfaces and cold temperature applications
- Available with custom printing for security and/or branding

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095541 | 313501B | Scotch® Box Sealing Tape 313, Brown, 50 mm x 100 m, 0.065 mm | 36 | Roll |
| 7000095540 | 313501T | Scotch® Box Sealing Tape 313, Clear, 50 mm x 100 m, 0.065 mm | 36 | Roll |

Scotch® Performance Low Noise Box Sealing Tape 3707

Use Scotch® Performance Low Noise Box Sealing Tape 3707 for its specifically designed adhesive that provides reduced noise during application. Our tape is made with and polypropylene film backing and solvent (natural rubber resin) adhesive. It resists splitting and absorbs impact shock.



- Get split resistance
- Absorbs impact shock

| - |
|---|
| |
| |

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095240 | 3707T506 | Scotch® Performance Low Noise Box Sealing Tape 3707, Transparent, 50 mm x 66 m | 36 | Roll |

Scotch® Performance PVC Box Sealing Tape 6890

Use Scotch® Performance PVC Box Sealing Tape 6890 for box sealing, combining, attaching, heat shrink sealing and bundling lightweight packages. Our tape is made with a PVC film backing and solvent (natural rubber resin) adhesive and is best applied at room temperature.

- Use for box sealing, combining, attaching, heat shrink sealing and bundling lightweight packages
- Eliminate the need for dispensers when tearing by hand
- Reduce noise level in the work area

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095243 | 6890W506 | Scotch® Performance PVC Box Sealing Tape 6890, White, 50 $\mbox{mm}x66\mbox{m}$ | 36 | Roll |

Scotch® High Performance Box Sealing Tape 3739

Re-seal and package heavy weights of valuable goods with Scotch® Box Sealing Tape 3739. Our tape is made of a high strength polypropylene film backing and hot melt synthetic rubber-resin adhesive, and can used for single strip closure of fibreboard boxes.

- Re-seal and package heavy weights of valuable goods
- Use for single strip closure of fibreboard boxes
- Performs well at all temperatures typically encountered by packaged products in shipping and storage environments

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095394 | 3739B759 | Scotch® High Performance Box Sealing Tape 3739, Brown, 75 mm x 990 m | 144 | Roll |
| 7100146490 | 3739T509N | Scotch® High Performance Box Sealing Tape 3739, Transparent, 50 mm x 990 m | 6 | Roll |
| 7000095395 | 3739T75 | Scotch® High Performance Box Sealing Tape 3739, Transparent, 75 mm x 66 m | 24 | Roll |
| 7000095396 | 3739T759 | Scotch® High Performance Box Sealing Tape 3739, Transparent, 75 mm x 990 m | 4 | Roll |
| 7000095412 | 138132 | Scotch® High Performance Box Sealing Tape 3739, Transparent, 150 mm x 990 m | 72 | Roll |

Focus

Scotch® Box Sealing Tape 311+

Scotch® Box Sealing Tape 311+ is a high performance industrial packaging tape for box sealing, splicing, recouperage and other demanding packaging applications. It offers good performance in damp and cold shipping and storage environments, even in below freezing temperatures.




- High performance industrial packaging tape designed for cold and damp temperatures
- Great for box sealing, splicing, recouperage and demanding packaging applications
- Good performance over broad temperature ranges

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100220442 | 311+48X66C | Scotch® Box Sealing Tape 311+, Transparent, 48 mm x 66 m | 36 | Roll |
| 7100220358 | 311+48X990C | Scotch® Box Sealing Tape 311+, Transparent, 48 mm x 990 m | 6 | Roll |

Scotch® General Purpose Low Noise Box Sealing Tape 309

Scotch® Box Sealing Tape 309 is a low noise general purpose packing tape suitable for light weight applications specifically in the food and beverage industry. The polypropylene film backing is easy to handle and resists abrasion, moisture and scuffing. The consistent and reliable backing easily conforms around edges and on rough surfaces for a tight seal.



- Acrylic adhesive with polypropylene backing delivers dependable, quality performance
- Resists UV rays without yellowing for archival applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000095580 | 309B7566 | Scotch® Box Sealing Tape 309, Brown, 75 mm x 66 m | 2 | Roll |
| 7000095558 | 309T7566 | Scotch® Box Sealing Tape 309, Transparent, 75 mm x 66 m | 24 | Roll |

Scotch® Box Sealing Tape 371

Scotch® Box Sealing Tape 371 securely closes a wide variety of box and carton materials, including corrugated fibreboard. The moisture-resistant polypropylene backing resists abrasion, chemicals, and scuffing to hold strong throughout the shipping process. It easily conforms around edges and on rough surfaces to provide a lasting hold.



- Rubber resin adhesive sticks quickly to a variety of materials, including fiberboard
- Tape resists nicks, abrasions, moisture and scuffing for long lasting hold
- Backing conforms around edges and rough areas for a tight seal

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000095343 | 371B3866 | Scotch® Box Sealing Tape 371, Brown, 38 mm x 66 m | 48 | Roll |
| 7100135324 | 37150BR | Scotch® Box Sealing Tape 371, Brown, 50 mm x 66 m | 36 | Roll |
| 7100144121 | 371C752 | Scotch® Box Sealing Tape 371, Brown, 75 mm x 132 m | 24 | Roll |
| 7000095375 | 37175990 | Scotch® Box Sealing Tape 371, Brown, 75 mm x 990 m | 4 | Roll |
| 7100144123 | 371T2566N | Scotch® Box Sealing Tape 371, Transparent, 25 mm x 66 m | 72 | Roll |
| 7000035373 | 371T3866 | Scotch® Box Sealing Tape 371, Transparent, 38 mm x 66 m | 48 | Roll |
| 7100135750 | 371T4866N | Scotch® Box Sealing Tape 371, Transparent, 48 mm x 66 m | 36 | Roll |
| 7100135318 | 37150TR | Scotch® Box Sealing Tape 371, Transparent, 50 mm x 66 m | 36 | Roll |
| 7100135321 | 3715010T | Scotch® Box Sealing Tape 371, Transparent, 50 mm x 100 m | 36 | Roll |
| 7100144147 | 371T759 | Scotch® Box Sealing Tape 371, Transparent, 75 mm x 132 m | 24 | Roll |
| 7100144124 | 371T759 | Scotch® Box Sealing Tape 371, Transparent, 75 mm x 990 m | 4 | Roll |
| 7000035377 | 206395 | Scotch® Box Sealing Tape 371, White, 50 mm x 66 m | 36 | Roll |

Tartan[™] Box Sealing Tape 369

Close lightweight envelopes, packages mailers, box and carton materials securely with Tartan™ Box Sealing Tape 369. Our tapes moisture-resistant polypropylene backing resists abrasion, chemicals, and scuffing to hold strong throughout the shipping process.

- Seal lightweight envelopes, packages mailers, box and carton materials securely
- Resists abrasion, chemicals, nicks and scuffing to hold strong throughout the shipping process
- Close packages securely without the holes, waste, sharp points and disposal of staples

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100135774 | 369B48X66J | Tartan [™] Box Sealing Tape 369, Brown, 48 mm x 66 m | 36 | Roll |
| 7100135749 | 369B48X132 | Tartan [™] Box Sealing Tape 369, Brown, 48 mm x 132 m | 36 | Roll |
| 7100135752 | 369T48X66J | Tartan [™] Box Sealing Tape 369, Transparent, 48 mm x 66 m | 36 | Roll |
| 7100135755 | 369T48X132J | Tartan [™] Box Sealing Tape 369, Transparent, 48 mm x 132 m | 36 | Roll |
| 7100135746 | 369T48X990 | Tartan [™] Box Sealing Tape 369, Transparent, 48 mm x 990 m | 6 | Roll |

Scotch® Performance Box Sealing Tape 3444

Seal cartons by using Scotch® Performance Box Sealing Tape 3444. Our sealing tape is made from non-silicone flat back impregnated paper, coated with a natural rubber adhesive. It sticks to a wide variety of surfaces.

- Apply to carton sealing applications
- Use as a single strip closure of lightweight boxes, repaired and miscellaneous packaging
- Get non-silicone flat-back impregnated paper, coated with a high tack, natural rubber adhesive

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100146500 | 34445050N | Scotch® Performance Box Sealing Tape 3444, Brown, 50 mm x 50 m | 36 | Roll |
| 7100146162 | ххх | Scotch® Performance Box Sealing Tape 3444, Brown, 75 mm x 50 m | 24 | Roll |

Scotch® Stretchable Tape 8884

Constructed with a specialized, transparent backing, Scotch® Stretchable Tape 8884 is designed to contain and secure pallets for shipping. It is coated with a synthetic rubber adhesive that removes cleanly when stretch over labels.

- Special polypropylene film backing provides 650% stretch factor allowing a 55 meter roll to yield 357 meters of tape
- Adhesive removes cleanly when stretched without damaging carton graphics or shipping instructions
- After stretching, polyethylene backing increases in strength for bundling and strapping applications.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048602 | 88843655 | Scotch® Stretchable Tape 8884, Clear, 36 mm x 55 m, 0.13 mm | 24 | Roll |







Scotch® Stretchable Tape 8886

Constructed with a specialized, transparent backing, Scotch® Stretchable Tape 8886 is designed to contain and secure pallets for shipping. It is coated with a synthetic rubber adhesive that removes cleanly when stretched over labels.

- Special polypropylene film backing provides 650% stretch factor allowing a 55 meter roll to yield 357 meters of tape
- Easily bolts to case sealer for simple installation
- After stretching, polyethylene backing increases in strength for bundling and strapping applications.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100025020 | 8886 | Scotch® Stretchable Tape 8886, Clear, 36 mm x 55 m, 0.17 mm | 24 | Roll |



Hang Tabs

3M[™] Hang Tab 1074

We designed 3M[™] Hang Tab 1074 to quickly stick to a product surface and allow that product to hang from a peg for display. These hang tabs are great for hanging shrink-wrapped packages and for in-store repair of damaged packaging, such as torn punches in chipboard header cards.

- Sticks instantly to shrink-wrapped packages, cartons, and product surfaces
- Polyester backing resists abrasion, splitting and edge tear
- Clear tape lets packaging copy and graphics show through

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000051823 | 3M1074 | 3M [™] Hang Tabs 1074, Transparent, 25 mm x 50 mm | 1 | Pack |

3M™ Hang Tab 1075

Clear sturdy polyester 50,8 mm x 50,8 mm tab with pressure sensitive adhesive backing. Sticks to most product or packaging surfaces so that the item can be displayed. Delta hole for secure holding on retail peg.

- Clear pads do not obscure packaging graphics. Pre-cut, bendable tab format for convenience and ease of use.
- Strong polyester backing resists abrasion, tearing and splitting.
- Clear tape won't obscure packaging copy, brand messaging or graphics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000001899 | 1075 | 3M [™] Hang Tabs 1075, Transparent, 50 mm x 50 mm | 10 | Pack |

3M™ Hang Tab 1076

Clear sturdy polyester 50,8 mm x 50,8 mm tab with pressure sensitive adhesive backing. Sticks to most product or packaging surfaces so that the item can be displayed. Round hole for secure holding on retail peg.

- Clear pads do not obscure packaging graphics. Pre-cut, bendable tab format for convenience and ease of use.
- Strong polyester backing resists abrasion, tearing and splitting.
- Aggressive hot melt rubber resin adhesive sticks to a variety of surfaces, including shrink wrapped packages and chipboard header cards.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000051800 | 3M1076 | 3M [™] Hang Tabs 1076, Transparent, 50 mm x 50 mm | 10 | Pack |










Surface Protection Films

3M[™] Industrial Protective Film 7070UV

3M[™] Industrial Protective Film 7070UV is an abrasion resistant, pressure sensitive adhesive backed film product designed to protect multiple industrial surfaces from damage caused by abrasion, scratching, erosion, UV and minor impacts. This rugged clear film is durable, flexible, and able to conform to curved surfaces while being easy to apply.



- Creates a highly durable, transparent shield without obscuring the surface design
- Features UV, weather and impact resistance for long-lasting performance

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100089302 | 7070UV48X36 | $3 M^{\scriptscriptstyle \rm M}$ Industrial Protective Film 7070UV, Transparent, 1219 vm x 33 m, 0.2 mm | 1 | Roll |

5

Tape Applicators, Dispensers & Kits



3M[™] Adjustable Paint Masking Applicator

3M[™] Adjustable Paint Masking Applicator is used to apply Scotch® Fine Line tapes on complex surfaces, such as the roofline or rear hatch of a vehicle. Designed especially for automotive original equipment manufacturers, these applicators are lightweight, intuitive and easy to handle, with an integrated cutter to help increase productivity.

- Precision on any line. Adjusts to meet a range of tape widths and application needs. Magnetic guidance, along with the integrated cutter ensures you apply the exact line you need every time.
- Fast application. Integrated cutting, clean web handling, and a thin profile created from an Automotive manufacturer's point of view.
- Robust in a tough environment. Made from impact resistant composite materials, it can stand up to manufacturing environments. A magnet embedded in the handle makes for ease of storage. All without sacrificing performance.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100259560 | xxx | 3M [™] Adjustable Paint Masking Applicator, ACL21 | 1 | Each |
| 7100259561 | ххх | 3M™ Adjustable Paint Masking Applicator, ACR21 | 1 | Each |
| 7100260574 | xxx | 3M [™] Adjustable Paint Masking Applicator, DDR21 | 1 | Each |
| 7100259562 | ххх | 3M [™] Adjustable Paint Masking Applicator, DDL21 | 1 | Each |

Scotch® Box Sealing Tape Dispenser H128

Our Scotch® Box Sealing Tape Dispenser H128 is a compact, heavy-duty steel dispenser designed for box and carton sealing. This compact dispenser gives you a quick and easy method for dispensing pressure sensitive tape directly from the roll.

- Heavy-duty construction for for tough work environments
- Hand-held tape design is comfortable to use
- Designed to provide tighter, more precise seals

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000004797 | H128 | Scotch® Box Sealing Tape Dispenser H128, 50 mm | 6 | Each |

Scotch® Low Noise Tape Dispenser H150

This hand-held, roll-on, pistol-grip dispenser is designed to reduce the noise of tape unwind during application. Sturdy, durable, and easy to load and operate. Accommodates tapes up to 2 inch (48 mm) wide.

- Low noise box sealing dispenser.
- 2 Inch (48 mm) maximum tape width capacity
- Lightweight carton sealing dispenser

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000056829 | H150 | Scotch® Low Noise Tape Dispenser H150, Grey, 48 mm | 6 | Each |





Scotch® Box Sealing Tape Dispenser H180

Tape up boxes quicker and easier than ever before with Scotch® Box Sealing Tape Dispenser H180. Our portable, hand-held tape dispenser comes with a pistol-grip design for easy application. Use it to tack, roll, buff and tear in one fluid motion.



- Seal your packages and boxes quicker and easier than ever before
- Tack, roll, buff and tear tape in one fluid motion
- Get increased control of tension and delivery with an adjustable, hub-mounted tape brake

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000146617 | H180 | Scotch® Box Sealing Tape Dispenser H180, Brown/Grey, 50 mm | 1 | Each |

Scotch® Box Sealing Tape Dispenser H183

Scotch® Box Sealing Tape Dispenser H183 has a pistol-grip design that allows the operator to apply, cut, and buff up to a 3 inch wide tape in an easy, one-hand motion.

- Pistol-grip style allows easy one-hand operation
- Built to dispense wider tapes up to 3-inch/72mm wide
- Lightweight, hand-held dispenser is easy to control

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000031099 | H183 | Scotch® Box Sealing Tape Dispenser H183, 76 mm | 5 | Each |

Scotch® ATG 700 Adhesive Transfer Tape Gun

3M[™] Scotch® ATG Adhesive Applicators apply adhesive transfer tape in a quick, easy, single handed operation. These lightweight applicators are ideal for use on small and medium assembly jobs as well as light and heavy duty industrial applications.

- Applies adhesive while removing and rewinding liner back into the applicator to eliminate clean-up
- Provide controlled one-step application with the touch of a finger
- Covered gears minimize applicator jams

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000031200 | ATG700K | Scotch® ATG Adhesive Transfer Tape Gun ATG700, Yellow, 6.4 mm Adapter, Model 19600 | 1 | Each |
| 7000031204 | ATG700 | Scotch® ATG Adhesive Transfer Tape Gun ATG700, Yellow, Applicator, Model 19600 | 6 | Each |



Manual Applicators

3M[™] Scotch-Weld[™] EPX Manual Dispenser and Applicators

Manual applicator for dispensing EPX adhesives in 38 and 50 ml cartridges supplied with two plungers for 1:1 / 2:1 and 10:1 adhesives.

- Dispenses two-component 3M[™] Scotch-Weld[™] Structural Adhesives
- Offers take-it-to-the-job convenience without the need for air hoses or electrical cords
- Ensures correct mix ratio during dispensing; no need to weigh components

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7100205939 | EPXIII 1-1 2-1 | 3M [™] Scotch-Weld [™] EPX Manual Dispenser and Applicators, Applicator w Plungers | 1 | Each |

Pneumatic Applicators

3M[™] Scotch-Weld[™] EPX Pneumatic Applicator

Quickly and easily metre, mix and apply two part adhesives with 3M[™] Scotch-Weld[™] EPX Pneumatic Applicator. Our applicator is designed to efficiently apply 3M[™] Scotch-Weld[™] Structural Adhesive Duo-Pak Cartridges for fast and simple applications using a pneumatic connection.



- Quickly and easily metre, mix and dispense two part adhesives
- Use with 3M[™] Scotch-Weld[™] Structural Adhesive Duo-Pak Cartridges
- Pistol grip provides comfortable handling and precise control

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|--------|
| 7000070273 | AIRAPPLI | 3M [™] Scotch-Weld [™] EPX Pneumatic Applicator Dispenser, 1:1/2:1, 50 ml | 1 | Bottle |
| 7100244653 | DRUCK490 | 3M [™] Scotch-Weld [™] EPX Pneumatic Applicator, Black, 490 mL | 1 | Each |

Labels



Label Stock

3M[™] Overlaminate Label Material 7732FL

3M[™] Overlaminate Label Material 7732FL utilizes a mat polyester film that is recommended for optimum durability and outdoor UV exposure. 3M[™] Adhesive 400 offers excellent low temperature performance and long term aging for resistance to yellowing in outdoor applications.

- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100009949 | 7732FLCONFIG | 3M [™] Overlaminate Label Material 7732FL, Matte Clear Polyester, 1372 mm, Config roll | 1 | Roll |

3M[™] Overlaminate Label Material 7731FL

3M[™]Overlaminate Label Material 7731FL utilizes a polyester film that is recommended for optimum durability and outdoor UV exposure. 3M[™] Adhesive 400 offers excellent low temperature performance and long term aging for resistance to yellowing in outdoor applications.

- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100003571 | 7731FLCONFIG | 3M [™] Overlaminate Label Material 7731FL, Clear, Config roll | 1 | Roll |

3M[™] Films & Liners Label Materials

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.

- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100104690 | G61SBCONFIG | 3M [™] Polyester Label Material G61SB, White, Config Roll | 1 | Roll |
| 7100104691 | G62SBCONFIG | 3M [™] Polyester Label Material G62SB, Silver, Config roll | 1 | Roll |







3M[™] Polyolefin Label Material FP0354EG

3M[™] Durable Label Material FP0354EG is a high performance material that offers excellent thermal stability and moisture resistance.

- Good moisture and humidity resistance
- Good thermal stability
- Designed for automotive applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|---|-----|------|
| 7100104648 | FP0354EGCONFIG | 3M [™] Polyolefin Label Material FP0354EG, White Matte, 1372 mm, Config roll | 1 | Roll |

3M[™] Removable Label Material FM01972

3M[™] Durable Label Material FM01972 is a durable, high performance material that offers excellent thermal stability. This polyester label product utilizes 3M[™] Adhesive R3500, which is designed for use on smooth surfaces such as glass, metal and plastic (including polystyrene) and offers excellent UV resistance, good initial tack, and long term adhesion with clean removability and is an excellent alternative to static cling. Note: As a removable adhesive, performance may vary depending upon the substrate to which it is applied. Therefore, extensive testing should be conducted prior to use and textured surfaces should be avoided. Not appropriate for children's toy or sticker applications.



- Good initial tack
- Long term adhesion with clean removability
- Repositionable

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100011840 | FM01972CONFIG | 3M [™] Removable Label Material FM01972, White Matte, 1372 mm, Config roll | 1 | Roll |

3M[™] Sheet Label Material 7903FL

3M[™] Sheet Label Material 7903FL is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock for 3M[™] Sheet Label Material 7903FL, is print treated for ink anchorage
- Liner provides easy sheet processing and is designed for layflat applications that require domed decal moulding
- 3M[™] Sheet Label Material 7903FL is UL recognized (File MH11410) and CSA accepted (File 99316). See the UL and CSA listings for details

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|----------------|--|-----|------|
| 7100013330 | 7903FL686508CL | 3M [™] Sheet and Screen Label Material 7903FL, Bright Silver Polyester, Config Roll | 1 | Roll |



3M[™] Performance Paper Label Material 7000

3M™ Performance Paper Label Material 7000 provides excellent resistance to flagging on small diameter vials.

- Facestock is ideal for traditional forms of press printing and write-on variable information
- Designed to survive autoclaving, ETO and gamma sterilization while adhered to most surfaces
- Meets many pharmaceutical industry or manufacturer specifications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100013721 | 7000CONFIG | 3M [™] Performance Paper Label Material 7000, White Glossy, 1524 mm, Config roll | 1 | Roll |

3M™ Tamper Evident Label Material 7866

3M[™] Tamper Evident Label Material 7866 is a gloss white top coated polyester label stock suitable for the production of electronically generated alphanumeric or bar code labels via a thermal transfer printer. The product is Tamper indicating, ideal for security labelling

- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100010005 | 7866CONFIG | 3M™ Tamper Evident Label Material 7866, White VOID Polyester Glossy, 1372 mm, Config roll | 1 | Roll |
| 7000116176 | 78666 | 3M™ Tamper Evident Label Material 7866, White, 152 mm x 508 m, 0.05 mm | 1 | Roll |

3M[™] Tamper Evident Label Material 7380

3M[™] Void Polyester Durable Label Material 7380 is a Tamper indicating material designed to provide a VOID message in the facestock when removal is attempted.

- Designed for a range of labelling applications where tamper-resistance is important
- Facestocks designed for reliable use and processing
- Acrylic adhesive is formulated for strength, tack and clarity on a variety of surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100011792 | 7380CONFIG | 3M [™] Tamper Evident Label Material 7380, White VOID Polyester Matte, 1372 mm, Config roll | 1 | Roll |



| 0 | |
|---|---|
| | 1 |



3M[™] Thermal Transfer Label Materials

Our 3M[™] Thermal Transfer Label Materials are versatile and durable label stocks. They provide excellent thermal stability and moisture resistance for use in demanding applications, such as bar code tracking. The adhesive on many labels offers excellent clarity and good initial tack to help improve the finished label.



- Offers excellent thermal stability and moisture resistance
- Versatile materials produced for use in a variety of applications
- Adhesive offers excellent clarity and good initial tack to help improve finished label

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|--|-----|------|
| 7100226149 | 3690SECONFIG | 3M™ Thermal Transfer Label Material 3690SE+, White Glossy, Roll, Config | 1 | Roll |
| 7100174304 | 3698152 | 3M [™] Thermal Transfer Label Material 3698E+, Silver, 152 mm x 250 m, 0.05 mm | 1 | Roll |
| 7100174265 | 3698E+305 | 3M™ Thermal Transfer Label Material 3698E+, Silver, 305 mm x 500 m, 0.05 mm | 4 | Roll |
| 7100181130 | 3698E+CONFIG ROLL | 3M™ Thermal Transfer Label Material 3698E+, Silver, Config Roll | 1 | Roll |
| 7100104576 | GHTRCONFIG | 3M™ Thermal Transfer Label Material 3922, White, Jumbo 1220 mm, Config Roll | 1 | Roll |
| 7000068783 | 3922152 | 3M [™] Thermal Transfer Label Material 3922DSL, White, 152 mm x 300 m, 0.05 mm | 1 | Roll |
| 7000043112 | 3922DSL6 | 3M™ Thermal Transfer Label Material 3922DSL, White, 610 mm x 300 m, 0.05 mm | 1 | Roll |
| 7100104663 | 7808ECONFIG | 3M™ Thermal Transfer Label Material 7808E, Silver, Config Roll | 1 | Roll |
| 7000116118 | 7872EC 150MM | 3M [™] Thermal Transfer Label Material 7872EC, Platinum, 150 mm x 508 m, 0.05 mm | 1 | Roll |
| 7100104656 | 76500CONFIG | 3M™ Thermal Transfer Label Material 76500, Clear, Config Roll | 1 | Roll |
| 7100104658 | 76615CONFIG | 3M [™] Thermal Transfer Label Material 76615, White, Config Roll | 1 | Roll |
| 7100104695 | 76622CONFIG | 3M [™] Thermal Transfer Label Material 76622, White, Config Roll | 1 | Roll |
| 7100104728 | 76751CCONFIG | 3M [™] Thermal Transfer Label Material 76751C, Silver matte, Config roll | 1 | Roll |
| 7100104662 | 76751SCONFIG | 3M™ Thermal Transfer Label Material 76751S, Silver, Config Roll | 1 | Roll |
| 7100104763 | 92062CONFIG | 3M [™] Thermal Transfer Label Material 92062, White, Aceton Resistent, Config Roll | 1 | Roll |
| 7100104764 | 92064CONFIG | 3M [™] Thermal Transfer Label Material 92064, Silver, Aceton Resistent, Config Roll | 1 | Roll |
| 7100104697 | 92200CONFIG | 3M [™] Thermal Transfer Label Material 92200, White, Confiburable rolls | 1 | Roll |
| 7100104692 | H10CHCONFIG | 3M [™] Thermal Transfer Label Material H10CH, Silver, Config Roll | 1 | Roll |

3M[™] Thermal Transfer Label Material 7875E

Our 3M[™] Thermal Transfer Label Materials are versatile and durable label stocks. They provide excellent thermal stability and moisture resistance for use in demanding applications, such as bar code tracking. The adhesive on many labels offers excellent clarity and good initial tack to help improve the finished label.



- Topcoated for thermal transfer printing
- The topcoat also provides improved ink anchorage for traditional forms of press printing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100104682 | 7875ECONFIG | 3M [™] Thermal Transfer Polyester Label Material 7875E, Platinum, Config roll | 1 | Roll |



3M™ Thermal Transfer Polyester Label Material 7876EC

3M[™] Thermal Transfer Polyester Label Material 7876EC is a clear polyester label material that offers premium durability and moisture resistance. This label product utilizes 3M[™] High Performance Acrylic Adhesive 350E, it offers excellent chemical resistance and holding strength even at high temperatures.

- Facestock is topcoated for thermal transfer printing. The topcoat also provides improved ink anchorage for traditional forms of press printing
- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100104683 | 7876ECCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7876EC, Clear Glossy, 1500 mm, Config roll | 1 | Roll |

3M[™] Versatile Print Label Material 7871V

3M[™] Versatile Print Label Material 7871V is a gloss polyester label material that offers durability and moisture resistance. The topcoat is formulated to print with multiple technologies, including UV inkjet, water flexo, UV flexo, thermal transfer, and screen printing. This label product utilizes 3M[™] High Performance Acrylic Adhesive 350, it offers excellent chemical resistance and holding strength even at high temperatures.

- Print water-based flexographic on gloss
- Near zero edge bleed and high image sharpness
- Run more jobs per batch on digital presses

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------------|---|-----|------|
| 7100166745 | 7871VMATTWHCONFIG | 3M [™] Versatile Print Label Material 7871V, White Glossy, Polyester, 1372 mm, Config roll | 1 | Roll |

3M™ Versatile Print Label Material 7872V

3M[™] Versatile Print Label Material is a durable label material with a new topcoat formulation that works with more inks on more printing presses, including water-based flexographic inks on gloss labels.

- Print water-based flexographic on gloss
- Near zero edge bleed and high image sharpness
- Run more jobs per batch on digital presses

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-----------------|---|-----|------|
| 7100166746 | 7872VPLATCONFIG | 3M [™] Versatile Print Label Material 7871V, Platinum Glossy, Polyester, 1372 mm, Config roll | 1 | Roll |

216









3M[™] Polyester Label Material 7871

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces
- Facestock is topcoated for thermal transfer printing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7000116117 | 7871EC6 | 3M [™] Polyester Label Material 7871, White Glossy, 150 mm x 508 m | 1 | Roll |
| 7100008116 | 7871CONFIG | 3M [™] Polyester Label Material 7871, White Glossy, 1375 mm, Config roll | 1 | Roll |
| 7100104734 | 7871ECONFIG | 3M [™] Polyester Label Material 7871E, Gloss White, PET50 350E / 46, Configurable Roll | 1 | Roll |
| 7000116065 | 7871EJ6 | 3M [™] Polyester Label Material 7871EJ, White Glossy, 150 mm x 508 m | 1 | Roll |
| 7100104678 | 7871EJCONFIG | 3M [™] Polyester Label Material 7871EJ, White Glossy, 1500 mm, Config roll | 1 | Roll |

3M[™] Thermal Transfer Polyester Label Material 7872

3M[™] Thermal Transfer Polyester Label Material 7872 is a gloss polyester label material that offers premium durability and moisture resistance. This label product utilizes 3M[™] High Performance Acrylic Adhesive 350, it offers excellent chemical resistance and holding strength even at high temperatures.



- Adhesive can permanently bond to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Thick adhesive caliper provides for stronger bond on textured surfaces
- Facestock is topcoated for thermal transfer printing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100104634 | 7872CONFIG | 3M [™] Thermal Transfer Polyester Label Material 7872, Platinum Glossy, 1500 mm, Config roll | 1 | Roll |
| 7100104679 | 7872ECCONFIG | 3M™ Thermal Transfer Polyester Label Material 7872EC, Platinum Glossy, 1500 mm, Config roll | 1 | Roll |
| 7100104680 | 7872EJCONFIG | 3M™ Thermal Transfer Polyester Label Material 7872EJ, Platinum Glossy, 1500 mm, Config roll | 1 | Roll |
| 7000116069 | 7872EJ6 | 3M™ Thermal Transfer Polyester Label Material 7872EJ, Platinum, 150 mm x 508 m, 0.08 mm | 1 | Roll |



3M[™] Thermal Transfer Label Material 7815E

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100104630 | 7815CONFIG | 3M [™] Thermal Transfer Label Material 7815, White, Config Roll | 1 | Roll |
| 7100104666 | 7815EBCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7815EB, White Matte, 1500 mm, Config roll | 1 | Roll |
| 7000116071 | 7815EH6 | 3M [™] Thermal Transfer Polyester Label Material 7815EH, White Matte, 150 mm x 508 m | 10 | Roll |
| 7100104667 | 7815EHCONFIG | 3M™ Thermal Transfer Polyester Label Material 7815EH, White Matte, 1500 mm, Config roll | 1 | Roll |

3M[™] Thermal Transfer Label Material 7816E

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.




- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100185368 | xxx | 3M™ Thermal Transfer Label Material 7816EC, Config rolls | 1 | Roll |
| 7000116080 | 7816000000 | 3M™ Thermal Transfer Polyester Label Material 7816E, White Glossy, 150 mm x 508 m | 1 | Roll |
| 7100104668 | 7816ECONFIG | 3M [™] Thermal Transfer Polyester Label Material 7816E, White Glossy, 1500 mm, Config roll | 1 | Roll |
| 7100104669 | 7816EHCONFIG | 3M™ Thermal Transfer Polyester Label Material 7816EH, White Glossy, 1500 mm, Config roll | 1 | Roll |



3M[™] Thermal Transfer Label Material 7818EH

3M™ Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7000116101 | 7818EH6 | 3M [™] Thermal Transfer Polyester Label Material 7818EH, Silver Matte, 150 mm x 508 m | 1 | Roll |
| 7100104670 | 7818EHCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7818EH, Silver Matte, 1500 mm, Config roll | 1 | Roll |

3M[™] Thermal Transfer Label Material 7813EH

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.



- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7000116354 | 7813EH6 | 3M™ Thermal Transfer Polyester Label Material 7813EH, Silver Matte, 150 mm x 508 m | 1 | Roll |
| 7100104665 | 7813EHCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7813EH, Silver Matte, 1500 mm, Config roll | 1 | Roll |

3M[™] Thermal Transfer Label Material 7879EJ

3M™ Thermal Transfer Polyester Label Material 7879EJ is a durable silver polyester label material that is designed for use in demanding applications. This label material utilizes 3M™ High Performance Acrylic Adhesive 350E, it offers excellent chemical resistance and holding strength even at high temperatures.

- Topcoat provides the advantages of matte coating combined with a surface that is smooth enough for thermal transfer printing
- 3M™ High Performance Acrylic Adhesive 350E permanently bonds to high surface energy (HSE) and low surface energy (LSE) plastics, textured and contoured surfaces, powder coatings, and slightly oily metals
- Glassine paper liner

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100024083 | 7879EJ6 | 3M [™] Thermal Transfer Label Material 7879EJ, Silver, 150 mm x 508 m, 0.08 mm | 1 | Roll |
| 7100104684 | 7879EJCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7879EJ, Silver Matte, 1500 mm, Config roll | 1 | Roll |



3M™ Thermal Transfer Polyester Label Material 7874EC

3M[™] Films & Liners Label Materials encompasses a full selection of facestocks, liners and secondary liners for custom assembly that meets specific labelling requirements. Topcoated film facestocks include polyester, acetate, polyolefin and semi-rigid vinyl, and some are available with pre-applied 3M adhesive. Kraft and film liners are available with or without release coating on one or two sides.

- Materials designed for efficient, effective custom label assembly
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7100104681 | 7874ECCONFIG | 3M [™] Thermal Transfer Polyester Label Material 7874EC, White Matte, 1500 mm, Config roll | 1 | Roll |
| 7100023942 | 7874EC6 | 3M [™] Thermal Transfer Polyester Label Material 7874EC, White, 150 mm x 508 m, 0.08 mm | 1 | Roll |

3M™ Thermal Transfer Label Material 3921

3M[™] Thermal Transfer Acrylate Label Material 3921 consists of a non-topcoated acrylate facestock designed for thermal transfer printing and withstand high temperatures and resist chemicals such as those found in the fabrication of printed circuit boards (PCBs).

- Acrylate facestock for high temperature applications
- 55# densified kraft liner assures consistent die cutting
- Matte white facestock for good print contrast and easy readability of barcodes and variable information

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000032795 | 39216 | 3M [™] Thermal Transfer Label Material 3921, White Matte, 152 mm x 300 m, 0.05 mm | 1 | Roll |

3M™ Thermal Transfer Printable Retro-Reflective Label Material 3929

3M[™] Label Material 3929 thermal transfer printable retro-reflective film with 3M[™] Adhesive 200 on a clay-coated paper liner is designed for long range bar code scanning. When bar code printed, the retro-reflective facestock extends the maximum and minimum scanning distance of long range scanners.

NOTE: 3M is unable to specify a maximum scanning distance with this material because of the differences between long range scanners.

- Retro-reflective facestock
- \bullet Designed for use with long range scanners
- Fan folding is not recommended, roll-to-roll is the preferred continuous printing process

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000116134 | 39296 | 3M [™] Thermal Transfer Printable Retro-Reflective Label Material 3929, Silver Glossy, 152 mm x 508 m, 0.026 mm | 1 | Roll |
| 7000116136 | 392924 | 3M [™] Thermal Transfer Printable Retro-Reflective Label Material 3929, Silver Glossy, 610 mm x 508 m, 0.026 mm | 2 | Roll |







3M[™] Foil Label Material 7800

3M[™] Foil Label Materials feature durable, thin gauge 1145 H19 aluminum, a cost-effective alternative to aluminum nameplates. Vinyl topcoating makes labels printable with conventional or UV inks. Our 3M[™] Adhesive 320 delivers excellent adhesion to surfaces including most plastics in a variety of conditions. Polycoated or densified kraft liners make for efficient rotary and roll to roll processing.



- Great alternative to traditional aluminum nameplates
- Vinyl topcoated aluminum foil facestock is extremely durable and suitable for a range of printing processes

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048467 | 78006 | 3M [™] Foil Label Material 7800, Silver Matte, 165 mm x 508 m, 0.05 mm | 1 | Roll |
| 7000048578 | 780020 | 3M™ Foil Label Material 7800, Silver Matte, 508 mm x 508 m, 0.05 mm | 2 | Roll |

3M[™] High Temperature Resistant Label 3922

High temperature resistant labelstock 3922 is recommended for thermal transfer imaged labelstock applications where a high durability and superb resistance against highest application temperature is required.

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000068216 | 3922DSL3 | 3M [™] Thermal Transfer Label Materials 3922DSL, White, 305 mm x 300 m, 0.05 mm | 4 | Roll |

3M™ Thermal Transfer Label Material 7777

3M™ Polypropylene Label Material 7777 is a durable material that offers good thermal stability and moisture resistance.

- Polypropylene is a conformable facestock for curved surfaces
- Corona-treated facestock for improved ink receptivity
- Good film stiffness allows easy die cutting and dispensing for automatic applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100072934 | 7777CONFIG | 3M [™] Thermal Transfer Label Material 7777, White Glossy, 1372 mm, 0.07 mm, Config roll | 1 | Roll |



3M™ Thermal Transfer Label Material 7810

3M[™] Thermal Transfer Polyester Label Material 7810 is a durable matte polyester material that offers high abrasion and chemical resistance. This material utilizes 3M[™] Acrylic Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte TT topcoat on white PET facestock
- Matte topcoat provides the advantages of matte coating combined with a surface that is smooth enough for thermal transfer printing
- Adhesive bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|--|-----|------|
| 7000116350 | 7810EH6 | 3M™ Thermal Transfer Label Material 7810EH, White, 150 mm x 508 m | 10 | Roll |
| 7100104664 | 7810EHCONFIG | 3M™ Thermal Transfer Polyester Label Material 7810EH, White Matte, 1500 mm, Config roll | 1 | Roll |

3M[™] Dot Matrix Label Materials

3M[™] Dot Matrix Label Materials are designed specifically for computer imprinting applications, including dot matrix/impact. Topcoated facestocks from polyester to semi-rigid vinyl are excellent for variable information and hand writeability. A range of 3M adhesives suits labelling applications from low-temp environments and acid-resistant battery labels to decorative films and overlaminations.

- Designed specifically for computer printing applications including dot matrix/impact
- Facestocks include polyester, polypropylene and semi-rigid vinyl for durability and conformability
- Excellent for variable information and printability

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100174284 | 3692-1802E+12 | 3M [™] Scotchcal [™] Thermal Transfer Printable Label material 3692-1802EDL+, Yellow Glossy, 1220 mm x 250 m | 1 | Roll |

3M[™] Dot Matrix Label Material 7880

3M[™] Dot Matrix Label Materials are designed specifically for computer imprinting applications, including dot matrix/impact. Topcoated facestocks from polyester to semi-rigid vinyl are excellent for variable information and hand writeability. A range of 3M adhesives suits labelling applications from low-temp environments and acid-resistant battery labels to decorative films and overlaminations.

- Designed specifically for computer printing applications including dot matrix/impact
- Facestocks include polyester, polypropylene and semi-rigid vinyl for durability and conformability
- Excellent for variable information and printability

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100048944 | 7880CONFIG | 3M [™] Dot Matrix Label Material 7880, White Matte, Polyester, 1372 mm, Config roll | 1 | Roll |







3M[™] Scotchcal[™] Polyvinylchloride Foil 3690E+

3M[™] Scotchcal[™] Label 3690+ utilizes a durable PVC facestock and a special modified acrylic adhesive. The adhesive is designed to adhere well to difficult surfaces such as rough and porous substrates, and low surface energy materials such as polyethylene and polypropylene. It is suitable for outdoor applications, which require a high degree of durability. Their thin caliper and flexibility allow for conformance to small diameter and complex curved surfaces.



- White PVC facestock offers durability and conformability
 Designed to withstand ultraviolet light, temperature extremes and solvents
- High density bar codes can be printed on either stock with a thermal transfer printer and resin ribbon

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100174271 | 3690152 | 3M [™] ScotchCal [™] Performance Label Material 3690E+, White Glossy, 152 mm x 250 m | 1 | Roll |
| 7100174272 | 3690E+305 | 3M [™] ScotchCal [™] Performance Label Material 3690E+, White Glossy, 305 mm x 500 m | 1 | Roll |
| 7100174270 | 3690E+610 | 3M [™] ScotchCal [™] Performance Label Material 3690E+, White Glossy, 610 mm x 500 m | 2 | Roll |
| 7100181129 | 3690E+CONFIG | 3M [™] ScotchCal [™] Performance Label Material 3690E+, White Glossy, 1220 mm, Config roll | 1 | Roll |
| 7100104736 | 7874EKCONFIG | 3M™ Thermal Transfer Label Material 3690E, Config roll | 1 | Roll |

3M[™] Laser Markable Label Stock

3M[™] Laser Markable Label Stock has a top layer which is etched off during the process to reveal an ultra-durable image. The same laser can also "kiss cut" the label to size, maximizing flexibility for producing variable labels for durable applications.

- Ultra-durable performance
- Top coated face stocks include polyester, vinyl and polyethylene for strength and conformability
- Suitable for a range of printing methods including flexographic, dot matrix and thermal transfer

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000068786 | 7846120 | 3M [™] Laser Markable Label Stock 7846, Black/White, 120 mm x 300 m, 0.06 mm | 1 | Roll |
| 7000068792 | 78483 | 3M [™] Laser Markable Label Stock 7848, Black, 90 mm x 300 m, 0.06 mm | 1 | Roll |
| 7000032796 | 78484 | 3M [™] Laser Markable Label Stock 7848, Silver/Black, 120 mm x 300 m, 0.06 mm | 1 | Roll |

3M[™] Laser Markable Label Material 7847

3M™ Laser Markable Label Material 7847 is a specialty film label material where a laser can ablate the top layer of a dual-layer facestock to create an image.

- Cast modified acrylate facestock offers long-term durability and excellent abrasion, temperature, chemical and environmental resistance
- High-resolution and high-contrast images markable with standard Nd-Yag lasers for smaller barcodes, 2-D symbologies and fine point text
- Excellent convertability ("kiss cutting") of acrylate facestock on densified kraft liner

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000068795 | 784790 | 3M [™] Laser Markable Label Material 7847, Black/White Matte, 90 mm x 300 m, 0.06 mm | 1 | Roll |
| 7000032797 | 7847120 | 3M [™] Laser Markable Label Material 7847, Black/White Matte, 120 mm x 300 m, 0.06 mm | 1 | Roll |











3M™ Dot Matrix Label Material 7983

3M[™] Screen Printable Sheet Polyester Label Material 7983 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance. This material utilizes 3M[™] Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte coating is compatible with screen printing and resists degradation from scuffing, chemicals, moisture, and wide temperature fluctuations
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- Liner provides easy sheet processing and is designed for layflat. The backside of the liner is not printable

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-------|
| 7000029138 | 7983/508 | 3M [™] Dot Matrix Label Material 7983, Silver Matte, 508 mm x 686 mm | 100 | Sheet |
| 7100307932 | 7983/508 | 3M [™] Dot Matrix Label Material 7983, Silver Matte, 508 mm x 686 mm | 100 | Sheet |

3M[™] Sheet and Screen Label Material 7908E

3M[™] Sheet and Screen Label Materials 7908E is our 50 micron gloss white polyester facestock with 45 micron acrylic adhesive 350 on a 170 micron polycoated kraft liner with green 3M Logo printed. It's UL recognised and CSA accepted.

- Facestocks (polyester and vinyl) and adhesives offer heat tolerance, clarity, and UV resistance
- 350 high performance acrylic adhesive for high shear strength on low surface energy (LSE) substrates
- Polycoated and film liners are suitable for efficient processing

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-------|
| 7100169890 | 7908686 | 3M [™] Sheet and Screen Label Material 7908E, White Glossy, 508 mm x 686 mm | 100 | Sheet |
| 7100104761 | 7908CONFIG | 3M [™] Sheet and Screen Label Material 7908E, White Glossy, 1500 mm, Config roll | 1 | Roll |

3M[™] Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7220SA

3M[™] Screen Printable Polyester Performance Durable Label Material with Structured Adhesive 7220SA is a durable, high performance material that offers excellent thermal stability and moisture resistance.

• Most universal adhesive for label materials

- Adhesive offers excellent chemical resistance and holding strength, even at high temperatures
- Liner provides easy sheet processing and is designed for the ultimate in layflat

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000047374 | 7220SA1371 | 3M [™] Sheet and Screen Label Material 7220SA, White Glossy, 1372 mm x 229 m, 0.05 mm | 1 | Roll |







224



3M[™] Removable Vinyl Label Material 7600

3M[™] Removable Vinyl Label Material 7600 is a conformable white vinyl stock that utilizes 3M[™] Acrylic Adhesive 500 which offers clean removability on most surfaces for up to one year, as well as, excellent plasticizer resistance.

- Conformable to contoured surfaces
- Resists wrinkling and delamination
- One-piece removal up to one year after application

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000047365 | ххх | $3 M^{\scriptscriptstyle \rm T\!M}$ Removable Vinyl Label Material 7600, White Satin, 686 mm x 508 m, 0.09 mm | 1 | Roll |

3M[™] Overlaminate Label Materials

3M[™] Overlaminate Label Materials are designed for protective overlaminate applications. A durable facestock resists scuffs, abrasions and chemicals. Different adhesives are available for performance in a variety of temperatures, substrates, and environments – including oily metals.

- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestocks resist abrasion, scuffs and weathering

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7100104650 | 7746CONFIG | 3M [™] Overlaminate Label Material 7746, Clear Glossy, 1500 mm, Config roll | 1 | Roll |
| 7100104685 | C22CICONFIG | 3M™ Overlaminate Label Material C22CI, Clear Matte, 1220 mm, Config roll | 1 | Roll |

3M[™] Overlaminate Label Material 8417

3M[™] PET Durable Label Material 8417 is a self-wound (linerless) transparent polyester film coated with 3M[™] Adhesive 100 High-temperature Acrylic. It is often used as an overlaminate in conjunction with 3M[™] PET Durable Label Material 8418.

- Labels for protective overlaminate applications
- Offers UV resistance and helps prevent colour fading
- Facestock resists abrasion, scuffs and weathering

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7000048426 | 841750 | 3M™ Overlaminate Label Material 8417, Clear, 50 mm x 198 m | 24 | Roll |
| 7100027905 | 84171220 | 3M™ Overlaminate Label Material 8417, Glossy Clear Polyester, 1220 mm x 197 m | 1 | Roll |





3M[™] Tamper Evident Label Materials

3M[™] Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges. Destructible and non-destructible facestocks including paper, vinyl, acetate and polyester, and adhesives are formulated for a variety of surfaces including polyolefins. Reinforced paper liners add dimensional stability during processing.



- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|---|-----|------|
| 7100104640 | 7382CONFIG | 3M [™] Polyester Tamper Indicating Material 7382, Silver, CONFIG, Rol | 1 | Roll |
| 7100104730 | 76968ECONFIG | 3M [™] Polyester Tamper Indicating Material 76968E, White, CONFIG, Rol | 1 | Roll |
| 7100104660 | 76970CONFIG | 3M [™] Polyester Tamper Indicating Material 76970, White, CONFIG, Rol | 1 | Roll |
| 7100104661 | 76971CONFIG | 3M [™] Polyester Tamper Indicating Material 76971, Silver, CONFIG, Rol | 1 | Roll |
| 7000068779 | 3812D6 | 3M™ Tamper Evident Label Material 3812DSL, White, 152 mm x 508 m, 0.04 mm | 1 | Roll |
| 7100110454 | 3812DSLCONFIG | 3M [™] Tamper Evident Label Material 3812DSL, White, Config Roll | 1 | Roll |
| 7100104659 | 76799CONFIG | 3M [™] Tamper Evident Label Material 76799, Silver, Config Roll | 1 | Roll |

3M[™] Tamper Evident Label Materials 3812

3M[™] Tamper Evident Label Materials are available in a full range of materials, patterns and colours for specific tamper-resistant labelling challenges. Destructible and non-destructible facestocks including paper, vinyl, acetate and polyester, and adhesives are formulated for a variety of surfaces including polyolefins. Reinforced paper liners add dimensional stability during processing.



- Designed for a range of labelling applications where tamper-resistance is important
- Destructible and non-destructible facestocks include paper, vinyl, acetate and polyester for reliable use and processing
- Range of acrylic adhesives is formulated for strength, tack and clarity on a variety of surfaces

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|------|
| 7000068776 | 38126 | 3M [™] Tamper Evident Label Material 3812, White, 152 mm x 508 m, 0.04 mm | 1 | Roll |
| 7000068775 | 381212 | 3M [™] Tamper Evident Label Material 3812, White, 305 mm x 508 m, 0.04 mm | 1 | Roll |



3M[™] Press Printable Label Materials

3M[™] Thermal Transfer Polyester Label Material 92200 is our 50 micron, gloss white printable polyester label stock. It has a 65 micron acrylic adhesive SE100 on a 62 gsm white densified double sided glassine liner and is UL and cUL recognised.



• Designed for a full range of on-press printed label applications including flexographic and screen

- Facestocks include polyester, vinyl and acetate for durability and conformability
- Range of 3M acrylic adhesives suits the most specific applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|---------------|--|-----|------|
| 7100104701 | 76510CONFIG | 3M [™] Polyester Label Material 76510, Clear glossy, Config Roll | 1 | Roll |
| 7100104725 | 76550CCONFIG | 3M [™] Polyester Label Material 76550C, Clear Matte, Config Roll | 1 | Roll |
| 7100104726 | 76605CCONFIG | 3M [™] Polyester Label Material 76550C, White, Config Roll | 1 | Roll |
| 7100104657 | 76610CONFIG | 3M [™] Polyester Label Material 76610, Clear, Config Roll | 1 | Roll |
| 7100104702 | 76616CONFIG | 3M [™] Polyester Label Material 76616, White Matte, Config Roll | 1 | Roll |
| 7100104720 | 76712CONFIG | 3M [™] Polyester Label Material 76712, Silver Matte, Config Roll | 1 | Roll |
| 7100104721 | 76750CONFIG | 3M [™] Polyester Label Material 76750, Silver Matte, Config Roll | 1 | Roll |
| 7100104729 | 76759CCONFIG | 3M [™] Polyester Label Material 76759C, Silver Matte, Config Roll | 1 | Roll |
| 7100104686 | D84YBCONFIG | 3M [™] Polyester Label Material D84YB, Platinum Silver, Config Roll | 1 | Roll |
| 7100104687 | D85YBCONFIG | 3M [™] Polyester Label Material D85YB, White, Jumbo, 1500 mm, Variable Roll Dimensions | 1 | Roll |
| 7100104743 | G02C3CONFIG | 3M [™] Polyester Label Material G02C3, Clear Matte, Config Roll | 1 | Roll |
| 7100104745 | G35C3CONFIG | 3M [™] Polyester Label Material G35C3 , Clear glossy, Config Roll | 1 | Roll |
| 7100104688 | G35CCCONFIG | 3M [™] Polyester Label Material G35CC, Matt White, Config Roll | 1 | Roll |
| 7100104748 | H10C3CONFIG | 3M™ Polyester Label Material H10C3, Silver Matte, Config Roll | 1 | Roll |
| 7100104750 | H11C3CONFIG | 3M [™] Polyester Label Material H11C3, White Matte, Config Roll | 1 | Roll |
| 7100104693 | H12CBCONFIG | 3M [™] Polyester Label Material H12CB, Clear, Config Roll | 1 | Roll |
| 7100104654 | 100Y3CONFIG | 3M™ Polyester Label Material I00Y3, Silver, Jumbo, 1500 mm, Variable Roll Dimensions | 1 | Roll |
| 7100104752 | I01Y3CONFIG | 3M [™] Polyester Label Material I01Y3, White Matte, Config Roll | 1 | Roll |
| 7100104756 | 92979CONFIG | 3M [™] Polyolefin Label Material 92979, White Matte, Config Roll | 1 | Roll |
| 7000116365 | 786000000 | 3M [™] Press Printable Label Material 7860E, White, 150 mm x 508 m, 0.05 mm | 1 | Roll |
| 7100104671 | 7860ECONFIG | 3M [™] Press Printable Label Material 7860E, White, Jumbo 1500 mm, Config Rolls | 1 | Roll |
| 7100104672 | 7860EHCONFIG | 3M [™] Press Printable Label Material 7860EH, White, Config Roll | 1 | Roll |
| 7100104673 | 7861ECONFIG | 3M [™] Press Printable Label Material 7861E, Clear, Config Roll | 1 | Roll |
| 7100072947 | 7863CONFIG | 3M [™] Press Printable Label Material 7863, Silver, Jumbo 1372 mm, Configurable rolls | 1 | Roll |
| 7100073737 | 76717NACONFIG | 3M [™] Press Printable Label Material 76717NA, White, Confil Roll | 1 | Roll |
| 7100104699 | 76759CONFIG | 3M [™] Press Printable Label Material 76759, Silver Matte, Config Roll | 1 | Roll |
| 7100075712 | 92200250 | 3M [™] Press Printable Label Material 92200, White, 1500 mm x 250 m, 0.05 mm | 1 | Roll |
| 7100104655 | H01C3CONFIG | 3M™ Thermal Transfer Printable Label Material H01C3, Config Roll | 1 | Roll |
| | | | | |



3M[™] Press Printable Label Material 7868

3M[™] Press Printable Label Material 7868 is excellent for efficiency across a wide range of printed labelling applications. Topcoated facestock provides a wide choice of durability and conformability, and suit specific inks and methods. 3M adhesives are designed for applications requiring high tack, temperature performance, challenging substrates and more.

- Designed for a full range of on-press printed label applications including flexographic and screen
- Facestocks include polyester, vinyl and acetate for durability and conformability
- Range of 3M acrylic adhesives suits the most specific applications

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|--------------|---|-----|------|
| 7100104674 | 7868ECONFIG | 3M [™] Press Printable Label Material 7868E, White, Confil Roll | 1 | Roll |
| 7100104675 | 7868ECCONFIG | 3M [™] Press Printable Label Material 7868EC, White, Confil Roll | 1 | Roll |

3M[™] Computer-Imprintable Polyester Label Material 7883

3M[™] Computer-Imprintable Polyester Label Material 7883 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance

- Topcoated polyester is compatible with dot matrix printing and is hand writeable
- #300 adhesive bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- 55# densified kraft liner assures consistent die cutting

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|------|
| 7100009898 | 7883CONFIG | 3M [™] Dot Matrix Label Material 7883, Silver Matte, Polyester, 1372 mm, Config roll | 1 | Roll |

3M[™] Sheet and Screen Label Material 7940

3M[™] Aluminium Foil Label Material 7940 is a durable, thin gauge aluminium designed to meet a wide range of difficult nameplate application requirements. 3M[™] Aluminium Foil Label Material 7940 utilizes 3M[™]Adhesive 320 which offers excellent adhesion to a variety of surfaces including high surface energy (HSE) and low surface energy (LSE) plastics.

- The liner for 3M label material 7940 provides easy sheet processing and is designed for layflat
- The backside of the liner is not printable
- UL Recognized file MH11410

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-------|
| 7100308327 | 7940508 | 3M [™] Sheet and Screen Label Material 7940, Silver Matte, 508 mm x 686 mm | 100 | Sheet |



3M[™] Sheet and Screen Label Material 7909S

3M[™] Sheet Label Material 7909 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Liner provides easy sheet processing and is designed for layflat
- The backside of the liner is not printable
- UL Recognized files MH11410, CSA Group Certified file 99316

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-------|
| 7100307925 | 79095 | 3M [™] Sheet and Screen Label Material 7909S, Silver Brushed, 508 mm x 686 mm | 100 | Sheet |

3M[™] Screen Printable Sheet Polyester Label Material 7931

3M[™] Screen Printable Sheet Polyester Label Material 7931 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|---|-----|-------|
| 7100307924 | 7931 | 3M [™] Sheet and Screen Label Material 7931, White Glossy, Polyester, 508 mm x 686 mm | 100 | Sheet |

3M[™] Screen Printable Sheet Polyester Label Material 7950

3M[™] Screen Printable Sheet Polyester Label Material 7950 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance.

- Facestock is topcoated for improved ink anchorage
- Variable information can be added by the end-user as the material is thermal transfer printable
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-------|
| 7100307922 | 7950 | 3M [™] Screenprintable Adhesive 7950, Clear, 508 mm 686 mm, 0.05 mm | 100 | Sheet |





3M[™] Screen Printable Sheet Polyester Label Material 7980

3M[™] Screen Printable Sheet Polyester Label Material 7980 is a durable, high performance material that offers excellent thermal stability, moisture resistance and chemical resistance. This material utilizes 3M[™] Adhesive 300, which has excellent quick tack and also bonds well to a variety of surfaces including LSE plastics.

- Matte coating is compatible with screen printing and resists degradation from scuffing, chemicals, moisture, and wide temperature fluctuations
- 3M adhesive 300 bonds well to a wide variety of substrates including metals, high surface energy (HSE) plastics and low surface energy (LSE) plastics
- Liner provides easy sheet processing and is designed for layflat. The backside of the liner is not printable

| Product ID | Part Number | Product Name | MOQ | OU |
|------------|-------------|--|-----|-------|
| 7100311466 | 7980 | 3M [™] Dot Matrix Label Material 7980, White Matte, 508 mm x 686 mm | 100 | Sheet |

0

| Product ID | Page |
|------------|------|
| 700000792 | 48 |
| 700000811 | 27 |
| 700000812 | 14 |
| 700000877 | 40 |
| 700000878 | 41 |
| 700000879 | 41 |
| 700000880 | 43 |
| 700000884 | 42 |
| 700000887 | 41 |
| 700000888 | 42 |
| 700000891 | 43 |
| 700000898 | 32 |
| 700000902 | 31 |
| 700000903 | 31 |
| 700000905 | 31 |
| 700000906 | 32 |
| 700000907 | 52 |
| 7000001161 | 159 |
| 7000001173 | 146 |
| 7000001178 | 141 |
| 7000001210 | 149 |
| 7000001226 | 106 |
| 7000001229 | 151 |
| 700001301 | 155 |
| 700001314 | 143 |
| 700001315 | 143 |
| 700001317 | 105 |
| 7000001323 | 51 |
| 7000001330 | 165 |
| 7000001482 | 110 |
| 7000001488 | 163 |
| 7000001581 | 147 |
| 7000001582 | 147 |
| 7000001584 | 53 |
| 7000001899 | 203 |
| 7000001960 | 128 |
| 7000001961 | 121 |
| 7000001962 | 122 |
| 7000001972 | 121 |
| 7000001973 | 122 |
| 7000001979 | 125 |
| 7000002105 | 129 |
| 7000002127 | 121 |
| 700002128 | 121 |
| 700002130 | 121 |
| 7000002131 | 121 |
| 700002132 | 121 |
| 700002133 | 121 |
| 7000004797 | 208 |
| 7000006770 | 53 |
| 7000006772 | 112 |
| 7000006778 | 65 |
| 7000006835 | 117 |
| 7000008397 | 150 |
| 7000017005 | 138 |
| 7000021302 | 170 |
| 7000028589 | 31 |
| 7000028590 | 31 |
| | |

| Product ID | Page |
|------------|------|
| 7000028669 | 146 |
| 7000028850 | 137 |
| 7000028851 | 136 |
| 7000028852 | 137 |
| 7000028853 | 137 |
| 7000028854 | 137 |
| 7000028855 | 136 |
| 7000028858 | 145 |
| 7000028860 | 159 |
| 7000028866 | 159 |
| 7000028874 | 94 |
| 7000028889 | 141 |
| 7000028933 | 167 |
| 7000028946 | 153 |
| 7000028947 | 153 |
| 7000029041 | 106 |
| 7000029043 | 63 |
| 7000029048 | 179 |
| 7000029049 | 180 |
| 7000029050 | 180 |
| 7000029057 | 191 |
| 7000029082 | 170 |
| 7000029136 | 149 |
| 7000029138 | 224 |
| 7000029144 | 149 |
| 7000029146 | 149 |
| 7000029149 | 154 |
| 7000029150 | 147 |
| 7000029152 | 147 |
| 7000029153 | 148 |
| 7000029154 | 148 |
| 7000029691 | 121 |
| 7000031099 | 209 |
| 7000031200 | 209 |
| 7000031204 | 209 |
| 7000031234 | 49 |
| 7000032383 | 168 |
| 7000032430 | 45 |
| 7000032795 | 220 |
| 7000032796 | 223 |
| 7000032797 | 223 |
| 7000033072 | 112 |
| 7000033105 | 75 |
| 7000033109 | 82 |
| 7000033110 | 82 |
| 7000033111 | 69 |
| 7000033113 | 69 |
| 7000033115 | 70 |
| 7000033116 | 70 |
| 7000033117 | 70 |
| 7000033119 | 77 |
| 7000033123 | 70 |
| 7000033126 | 71 |
| 7000033127 | 71 |
| 7000033132 | 64 |
| 7000033140 | 78 |
| 7000033141 | 65 |
| 7000033143 | 65 |
| | 00 |

| Product ID | Page |
|------------|------------------|
| 7000033144 | 65 |
| 7000033364 | 47 |
| 7000033721 | 49 |
| 7000033722 | 49 |
| 7000033731 | 36 |
| 7000033732 | 36 |
| 7000035363 | 151 |
| 7000035364 | 151 |
| 7000035365 | 151 |
| 7000035373 | 200 |
| 7000035377 | 200 |
| 7000035390 | 152 |
| 7000035391 | 152 |
| 7000035392 | 152 |
| 7000035410 | 150 |
| 7000035444 | 82 |
| 7000035445 | 115 |
| 7000035829 | 154 |
| 7000035835 | 149 |
| 7000035833 | 149 |
| 7000037570 | 151 |
| 7000037370 | 104 |
| 7000038379 | 104 |
| | |
| 7000041363 | <u>117</u> 81 |
| 7000041758 | - |
| 7000041764 | 115 |
| 7000041765 | 104 |
| 7000041773 | 81 |
| 7000042346 | 110 |
| 7000042350 | 190 |
| 7000042352 | 184 |
| 7000042353 | 190 |
| 7000042354 | 194 |
| 7000042356 | 184 |
| 7000042357 | 188 |
| 7000042358 | 188 |
| 7000042359 | 192 |
| 7000042360 | 192 |
| 7000042361 | 185 |
| 7000042362 | 185 |
| 7000042363 | 183 |
| 7000042364 | 183 |
| 7000042365 | 183 |
| 7000042366 | 183 |
| 7000042367 | 185 |
| 7000042368 | 185 |
| 7000042369 | 187 |
| 7000042370 | 188 |
| 7000042371 | 190 |
| 7000042372 | 187 |
| 7000042373 | 191 |
| 7000042374 | 193 |
| 7000042375 | 190 |
| 7000042376 | 191 |
| 7000042377 | 184 |
| 7000042382 | 184 |
| 7000042383 | 184 |
| 7000042385 | 188 |
| | |

| 7000042386 188 7000042388 187 7000042389 80 7000042390 79 7000042417 177 7000042429 113 7000042430 113 7000042431 92 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042750 189 7000042751 191 7000042752 191 7000042753 191 7000042756 185 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000046343 48 7000046343 48 7000046372 20 7000046343 18 7000046343 18 7000046374 27 7000046574 37 7000047348 170 | Product ID | Page |
|---|------------|------|
| 7000042389 80 7000042390 79 7000042417 177 7000042428 93 7000042429 113 7000042430 113 7000042432 110 7000042435 105 7000042435 105 7000042745 189 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 191 7000042755 193 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000046343 48 7000046343 48 7000046343 18 7000046343 18 7000046343 18 7000046343 18 7000046574 37 7000046574 37 7000047348 170 | 7000042386 | |
| 7000042390 79 7000042417 177 7000042428 93 7000042430 113 7000042431 92 7000042432 110 7000042435 105 7000042435 105 7000042745 189 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 191 7000042756 185 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000046343 48 7000046343 48 7000046343 48 7000046372 20 7000046373 41 7000046343 48 7000046374 37 7000046574 37 7000046574 37 7000047348 170 < | 7000042388 | 187 |
| 7000042417 177 7000042428 93 7000042429 113 7000042430 113 7000042432 110 7000042435 105 7000042435 105 7000042745 189 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 191 7000042756 185 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043128 71 7000046343 48 7000046343 48 7000046343 48 7000046372 20 7000046373 41 7000046374 27 7000046373 41 7000046574 37 7000047348 170 7000047348 170 | 7000042389 | 80 |
| 7000042428 93 7000042429 113 7000042430 113 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042751 193 7000042752 191 7000042753 193 7000042756 185 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043128 71 7000046343 48 7000046372 20 7000046372 20 7000046373 41 7000046374 27 7000046474 27 7000046574 37 7000046574 37 7000047348 170 7000047345 192 7000047426 192 | 7000042390 | 79 |
| 7000042429 113 7000042430 113 7000042432 110 7000042432 110 7000042435 105 7000042745 189 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 193 7000042754 185 7000042755 193 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043128 71 7000046343 48 7000046372 20 7000046372 20 7000046372 20 7000046373 48 7000046474 27 7000046574 37 7000046574 37 7000046574 37 7000047348 170 7000047342 192 7000047423 192 | 7000042417 | 177 |
| 7000042430 113 7000042431 92 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 193 7000042756 185 7000042758 113 700004312 215 700004312 71 700004312 71 700004312 71 700004312 20 700004314 177 700004343 48 7000046346 35 7000046372 20 7000046439 18 7000046433 48 7000046574 37 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 70 | 7000042428 | 93 |
| 7000042431 92 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042751 191 7000042752 191 7000042753 191 7000042756 185 7000042758 113 700004312 215 7000043128 71 7000043128 71 700004314 177 7000043128 71 7000046346 35 7000046346 35 7000046346 35 7000046372 20 7000046439 18 700004643 48 7000046513 41 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047423 192 <t< td=""><td>7000042429</td><td>113</td></t<> | 7000042429 | 113 |
| 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042756 185 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043744 177 7000043743 48 7000046346 35 7000046346 35 7000046346 35 7000046346 348 7000046346 35 7000046346 35 7000046474 27 7000046573 18 7000046574 37 7000047348 170 7000047348 170 7000047428 192 7000047429 190 7000047420 192 7000047442 154 | 7000042430 | 113 |
| 7000042432 110 7000042435 105 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042756 185 7000042758 113 7000042758 113 700004312 215 7000043128 71 7000043744 177 7000043744 177 7000043743 48 7000046346 35 7000046346 35 7000046372 20 7000046346 35 7000046373 18 7000046474 27 7000046573 18 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047426 192 7000047423 192 7000047443 137 | 7000042431 | 92 |
| 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043744 177 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 18 7000046439 18 7000046474 27 7000046573 39 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047423 192 7000047442 154 7000047452 137 | 7000042432 | |
| 7000042745 189 7000042748 192 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043744 177 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 18 7000046439 18 7000046474 27 7000046573 39 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047423 192 7000047442 154 7000047452 137 | 7000042435 | 105 |
| 7000042748 192 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043744 177 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 48 7000046343 18 7000046474 27 7000046573 18 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047429 190 7000047429 190 7000047452 137 7000047452 137 7000047463 136 | | |
| 7000042749 189 7000042750 189 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043744 177 7000046343 48 7000046343 48 7000046343 48 7000046343 18 7000046372 20 7000046373 18 7000046474 27 7000046513 41 7000046563 39 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047423 192 7000047425 137 7000047452 137 7000047453 136 7000047463 136 | | |
| 7000042750 189 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000043127 70 7000043128 71 7000043128 71 7000046343 48 7000046346 35 70000463472 20 7000046346 35 7000046372 20 7000046343 48 7000046343 18 7000046372 20 7000046373 18 7000046463 18 7000046574 37 7000046574 37 7000047348 170 7000047342 192 7000047423 192 7000047423 192 7000047423 192 7000047425 137 7000047452 137 7000047453 136 < | | |
| 7000042752 191 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000043112 215 7000043127 70 7000043128 71 7000043144 177 7000046343 48 7000046346 35 70000463472 20 7000046372 20 7000046372 20 7000046373 41 7000046463 18 7000046574 37 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047423 192 7000047429 190 7000047452 137 7000047452 137 7000047453 136 7000047463 136 7000047463 136 7000047463 137 | | |
| 7000042753 191 7000042755 193 7000042756 185 7000042758 113 7000042758 113 7000043112 215 7000043128 71 7000043128 71 7000043144 177 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046373 41 7000046474 27 7000046573 41 7000046574 37 7000046574 37 7000047348 170 7000047348 170 7000047423 192 7000047423 192 7000047429 190 7000047420 190 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 136 | | |
| 7000042755 193 7000042756 185 7000042758 113 7000043122 215 7000043128 71 7000043128 71 7000043744 177 7000046343 48 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046473 18 7000046474 27 7000046573 41 7000046574 37 7000047348 170 7000047365 225 7000047423 192 7000047423 192 7000047423 192 7000047429 190 7000047420 190 7000047452 137 7000047452 137 7000047453 136 7000047463 136 7000047463 136 7000047463 137 | | - |
| 7000042756 185 7000042758 113 7000042758 113 7000043112 215 7000043128 71 7000043128 71 7000043744 177 7000046343 48 7000046346 35 7000046347 20 7000046346 35 7000046372 20 7000046374 27 7000046474 27 7000046573 41 7000046574 37 7000047348 170 7000047365 225 7000047423 192 7000047423 192 7000047423 192 7000047423 192 7000047423 192 7000047423 192 7000047423 192 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 136 | | |
| 7000042758 113 7000043112 215 7000043127 70 7000043128 71 7000043128 71 7000043744 177 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046372 20 7000046474 27 700004653 18 700004653 41 700004653 39 7000046563 39 7000047348 170 7000047365 225 7000047423 192 7000047423 192 7000047423 192 7000047423 192 7000047423 193 7000047423 193 7000047452 137 7000047452 137 7000047463 136 7000047463 136 7000047463 137 | | |
| 7000043112 215 7000043127 70 7000043128 71 7000043744 177 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046439 18 7000046463 18 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047374 224 7000047423 192 7000047423 192 7000047423 192 7000047429 190 7000047423 192 7000047423 192 7000047423 193 700004742 154 7000047452 137 7000047453 137 7000047463 136 7000047463 136 7000047463 137 7000047463 137 | | |
| 7000043127 70 7000043128 71 7000043128 71 7000046343 48 7000046346 35 7000046346 35 7000046372 20 7000046439 18 7000046463 18 7000046513 41 7000046563 39 7000046574 37 7000046574 37 7000047365 225 7000047374 224 7000047423 192 7000047423 192 7000047429 190 7000047420 192 7000047421 154 7000047452 137 7000047452 137 7000047463 136 7000047463 136 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047463 137 | | |
| 7000043128 71 7000043744 177 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046372 20 7000046439 18 7000046474 27 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047423 192 7000047426 192 7000047429 190 7000047431 193 7000047441 154 7000047452 137 7000047452 137 7000047453 137 7000047463 136 7000047463 136 7000047463 137 7000047469 137 7000047469 137 7000047469 137 7000047469 137 | | |
| 7000043744 177 7000046374 177 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046372 20 7000046439 18 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047423 192 7000047426 192 7000047426 192 7000047431 193 7000047431 193 7000047452 137 7000047453 137 7000047453 137 7000047463 136 7000047463 136 7000047463 137 7000047469 137 7000047469 137 7000047469 137 7000047469 137 7000047475 137 | | |
| 7000046343 48 7000046346 35 7000046372 20 7000046372 20 7000046372 20 7000046372 20 7000046439 18 7000046474 27 7000046513 41 7000046563 39 7000047348 170 7000047348 170 7000047365 225 7000047423 192 7000047426 192 7000047429 190 7000047429 190 7000047421 154 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047475 137 7000047475 137 7000047469 137 | | |
| 7000046346 35 7000046372 20 7000046372 20 7000046439 18 7000046463 18 7000046474 27 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047348 170 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047431 193 7000047441 154 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047469 137 | | |
| 7000046372 20 7000046439 18 7000046463 18 7000046474 27 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047421 154 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047469 137 | | |
| 7000046439 18 7000046463 18 7000046474 27 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047365 224 7000047423 192 7000047426 192 7000047429 190 7000047421 193 7000047423 192 7000047429 190 7000047421 154 7000047452 137 7000047453 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047473 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 | | |
| 7000046463 18 7000046474 27 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047421 154 7000047452 137 7000047452 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047469 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 | | |
| 7000046474 27 7000046513 41 7000046563 39 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047429 190 7000047431 193 7000047452 137 7000047452 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 | | |
| 7000046513 41 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047429 190 7000047421 154 7000047452 137 7000047452 137 7000047453 136 7000047463 136 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047463 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 <tr< td=""><td></td><td>-</td></tr<> | | - |
| 7000046563 39 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047429 190 7000047431 193 7000047432 154 7000047452 137 7000047452 137 7000047462 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 <t< td=""><td></td><td></td></t<> | | |
| 7000046574 37 7000047348 170 7000047365 225 7000047374 224 7000047374 224 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047430 190 7000047431 193 7000047442 154 7000047452 137 7000047452 137 7000047462 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047473 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047463 136 7000047475 137 < | | |
| 7000047348 170 7000047365 225 7000047374 224 7000047374 224 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047430 190 7000047431 193 7000047441 154 7000047452 137 7000047452 137 7000047462 136 7000047463 136 7000047463 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047463 136 7000047475 137 | | |
| 7000047365 225 7000047374 224 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047430 190 7000047431 193 7000047431 193 7000047441 154 7000047452 137 7000047453 137 7000047463 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047839 113 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047374 224 7000047423 192 7000047426 192 7000047429 190 7000047429 190 7000047430 190 7000047431 193 7000047431 193 7000047431 193 7000047442 154 7000047452 137 7000047453 137 7000047463 136 7000047463 136 7000047468 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047452 145 7000047452 145 7000048399 113 7000048401 136 7000048401 140 | | |
| 700004742319270000474261927000047429190700004743019070000474311937000047441154700004744215470000474521377000047453137700004746213670000474631367000047463137700004746313770000474691377000047469137700004747513770000474751377000047475137700004747513770000474751377000047475137700004747413670000484011367000048404140 | | - |
| 700004742619270000474291907000047430190700004743119370000474411547000047442154700004745213770000474531377000047462136700004746313670000474631377000047463137700004746913770000474691377000047473137700004747513770000474751377000047475137700004747513770000474741377000047474137700004747413670000484011367000048404140 | | |
| 700004742919070000474301907000047431193700004744115470000474421547000047452137700004745313770000474621367000047463136700004746313770000474691377000047469137700004747313770000474751377000047475137700004747513770000474751377000047475137700004747413770000474741377000047475137700004747413670000484011367000048404140 | | - |
| 700004743019070000474311937000047441154700004744215470000474521377000047453137700004746213670000474631367000047463137700004746913770000474691377000047473137700004747513770000474751377000047475137700004747513770000474751377000047474137700004747513770000474741367000048404140 | | |
| 700004743119370000474411547000047442154700004745213770000474531377000047462136700004746313670000474631377000047469137700004746913770000474731377000047475137700004747513770000474751377000047475137700004747513770000474751377000047475137700004747513670000484011367000048404140 | | |
| 70000474411547000047442154700004745213770000474531377000047462136700004746313670000474631377000047469137700004746913770000474731377000047475137700004747513770000474751377000047475137700004747513770000474741367000048404140 | | |
| 7000047442 154 7000047452 137 7000047453 137 7000047462 136 7000047463 136 7000047463 136 7000047463 137 7000047463 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000047475 137 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047452 137 7000047453 137 7000047463 136 7000047463 136 7000047463 136 7000047463 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047452 145 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | - |
| 7000047453 137 7000047462 136 7000047463 136 7000047463 137 7000047467 137 7000047468 137 7000047469 137 7000047473 137 7000047474 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047462 136 7000047463 136 7000047463 137 7000047468 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047463 136 7000047467 137 7000047468 137 7000047469 137 7000047469 137 7000047473 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 700004746713770000474681377000047469137700004747313770000474741377000047475137700004752145700004839911370000484011367000048404140 | | |
| 7000047468 137 7000047469 137 7000047473 137 7000047473 137 7000047475 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047469 137 7000047473 137 7000047474 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047473137700004747413770000474751377000047475145700004839911370000484011367000048404140 | | |
| 7000047474 137 7000047475 137 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047475 137 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000047522 145 7000048399 113 7000048401 136 7000048404 140 | | |
| 7000048399 113 7000048401 136 7000048404 140 | | |
| 70000484011367000048404140 | | |
| 7000048404 140 | | |
| | | |
| 7000048422 159 | | |
| | 7000048422 | 159 |

| Product ID | Page |
|--------------------------|------|
| 7000048423 | 159 |
| 7000048424 | 116 |
| 7000048426 | 225 |
| 7000048455 | 159 |
| 7000048456 | 159 |
| 7000048457 | 159 |
| 7000048458 | 159 |
| 7000048459 | 159 |
| 7000048467 | 221 |
| 7000048482 | 79 |
| 7000048483 | 79 |
| 7000048496 | 94 |
| 7000048524 | 136 |
| 7000048578 | 221 |
| 7000048580 | 107 |
| 7000048602 | 201 |
| 7000048604 | 151 |
| 7000048605 | 151 |
| 7000048606 | 151 |
| 7000048608 | 151 |
| 7000048610 | 162 |
| 7000048627 | 162 |
| 7000048628 | 162 |
| 7000048629 | 162 |
| 7000048634 | 162 |
| 7000048652 | 161 |
| 7000048705 | 148 |
| 7000048706 | 106 |
| 7000048710 | 136 |
| 7000048712 | 155 |
| 7000048716 | 149 |
| 7000048721 | 147 |
| 7000048746 | 114 |
| 7000048748 | 113 |
| | |
| 7000048850 7000048856 | 153 |
| 7000048856 | 90 |
| 7000048873 | 139 |
| 7000048913 | 139 |
| 7000048918 | 139 |
| 7000048921 | 139 |
| 7000048923 | 139 |
| 7000048924 | 139 |
| 7000048939 | 154 |
| 7000049014 | 165 |
| 7000049097 | 105 |
| 7000049101 | 143 |
| 7000049101 | 143 |
| 7000049163 | 98 |
| 7000049173 | 194 |
| 7000049207 | 165 |
| 7000049210 | 68 |
| 7000049238 | 79 |
| 7000049257 | 68 |
| 7000049265 | 179 |
| 7000049273 | 114 |
| 7000049274 | 114 |
| | |

| Product ID | Page |
|------------|------|
| 7000049275 | 114 |
| 7000049277 | 180 |
| 7000049322 | 114 |
| 7000049325 | 114 |
| 7000049326 | 114 |
| 7000049448 | 67 |
| 7000049547 | 111 |
| 7000049564 | 170 |
| 7000049597 | 144 |
| 7000049603 | 144 |
| 7000049604 | 144 |
| 7000049661 | 169 |
| 7000049662 | 169 |
| 7000049663 | 169 |
| 7000049682 | 101 |
| 7000049683 | 100 |
| 7000049700 | 51 |
| 7000050053 | 149 |
| 7000050071 | 154 |
| 7000050074 | 149 |
| 7000050075 | 149 |
| 7000050076 | 149 |
| 7000050077 | 149 |
| 7000050118 | 147 |
| 7000050120 | 147 |
| 7000050122 | 147 |
| 7000050128 | 147 |
| 7000050131 | 148 |
| 7000050132 | 148 |
| 7000051776 | 123 |
| 7000051782 | 123 |
| 7000051800 | 203 |
| 7000051823 | 203 |
| 7000051892 | 128 |
| 7000051893 | 128 |
| 7000051894 | 128 |
| 7000051903 | 122 |
| 7000051909 | 121 |
| 7000052144 | 129 |
| 7000052205 | 130 |
| 7000052220 | 121 |
| 7000052222 | 123 |
| 7000052226 | 124 |
| 7000052227 | 124 |
| 7000056829 | 208 |
| 7000059884 | 151 |
| 7000059885 | 151 |
| 7000061749 | 47 |
| 7000061750 | 47 |
| 7000061752 | 47 |
| 7000061753 | 47 |
| 7000061757 | 51 |
| 7000061766 | 45 |
| 7000061767 | 45 |
| 7000061768 | 45 |
| 7000061785 | 47 |
| 7000061786 | 47 |
| 7000061787 | 47 |
| | |

| | P |
|--------------------------|------------|
| Product ID | Page |
| 7000061788 | 47 |
| 7000061789 | 47 |
| 7000061797 | 49 |
| 7000062000 | 143 |
| 7000062001 | 115 |
| 7000062459 | 150 |
| 7000062460 | 150 |
| 7000062909 | 50 |
| 7000068216 | 221 |
| 7000068775 | 226 |
| 7000068776 | 226 |
| 7000068779 | 226 |
| 7000068783 | 215 |
| 7000068786 | 223 |
| 7000068792 | 223 |
| 7000068795 | 223 |
| 7000070273 | 210 |
| 7000070288 | 46 |
| 7000070289 | 47 |
| 7000070297 | 46 |
| 7000070298 | 46 |
| 7000070299 | 46 |
| 7000070301 | 46 |
| 7000070522 | 122 |
| 7000070523 | 126 |
| 7000070525 | 128 |
| 7000070534 | 129 |
| 7000071715 | 56 |
| 7000071716 7000071732 | 56 |
| 7000071733 | 112 112 |
| | 112 |
| 7000071735 | 112 |
| 7000071737 | 112 |
| 7000071738 | 112 |
| 7000071739 | 112 |
| 7000071739 | 112 |
| 7000071741 | 112 |
| 7000071742 | 112 |
| 7000071742 | 112 |
| 7000071744 | 112 |
| 7000071745 | 112 |
| 7000071748 | 111 |
| 7000071750 | 111 |
| 7000071751 | 111 |
| 7000071753 | 111 |
| 7000071798 | 168 |
| 7000071804 | 168 |
| 7000072160 | 75 |
| 7000072164 | 75 |
| 7000072168 | 75 |
| 7000072169 | 75 |
| 7000072171 | 75 |
| 7000072183 | 82 |
| 7000072184 | 82 |
| 7000072197 | 75 |
| 7000072198 | 75 |
| 7000072202 | 75 |
| | .5 |

| Product ID | Page |
|------------|----------|
| 7000072204 | |
| 7000072204 | 75 75 |
| 7000072206 | 75 |
| 7000072212 | 76 |
| 7000072212 | 76 |
| 7000072218 | 76 |
| 7000072218 | 82 |
| 7000072229 | 82 |
| 7000072230 | 82 |
| 7000072230 | 82 |
| 7000072237 | 69 |
| 7000072248 | 69 |
| 7000072252 | 69 |
| 7000072254 | 69 |
| 7000072257 | 69 |
| 7000072260 | 69 |
| 7000072262 | 69 |
| 7000072265 | 69 |
| 7000072265 | 69 |
| 7000072267 | 69 |
| 7000072270 | 69 |
| 7000072276 | 70 |
| 7000072289 | 70 |
| 7000072292 | 70 |
| 7000072294 | 70 |
| 7000072296 | 77 |
| 7000072300 | 77 |
| 7000072302 | 77 |
| 7000072303 | 77 |
| 7000072309 | 70 |
| 7000072311 | 70 |
| 7000072317 | 71 |
| 7000072319 | 71 |
| 7000072321 | 71 |
| 7000072324 | 78 |
| 7000072325 | 78 |
| 7000072327 | 78 |
| 7000072329 | 78 |
| 7000072379 | 63 |
| 7000072381 | 63 |
| 7000072384 | 63 |
| 7000072386 | 63 |
| 7000072387 | 63 |
| 7000072399 | 64 |
| 7000072411 | 64 |
| 7000072413 | 64 |
| 7000072414 | 64 |
| 7000072415 | 64 |
| 7000072416 | 64 65 |
| 7000072464 | 65 |
| 7000072465 | 65 |
| 7000072488 | 64 |
| 7000072502 | 64 |
| 7000072511 | 64 |
| 7000072512 | 64 |
| 7000072522 | 78 |
| 7000072524 | 78 |
| | |

| Product ID | Page |
|------------|------|
| | |
| 7000072525 | 78 |
| 7000072529 | 65 |
| 7000072530 | 65 |
| 7000072533 | 65 |
| 7000073335 | 82 |
| 7000073424 | 88 |
| 7000077193 | 46 |
| 7000077228 | 47 |
| 7000077229 | 47 |
| 7000077265 | 46 |
| 7000079781 | 49 |
| 7000079786 | 49 |
| 7000079791 | 27 |
| 7000079794 | 49 |
| 7000079797 | 49 |
| 7000079808 | 49 |
| 7000079817 | 36 |
| 7000079819 | 36 |
| 7000079821 | 36 |
| 7000079823 | 36 |
| 7000079824 | 36 |
| 7000079843 | 36 |
| 7000079848 | 48 |
| 7000079889 | 46 |
| 7000079890 | 46 |
| 7000079905 | 36 |
| 7000079967 | 38 |
| 7000079968 | 38 |
| 7000079998 | 12 |
| 7000080008 | 17 |
| 7000080020 | 13 |
| 7000080037 | 17 |
| 7000080038 | 21 |
| 7000080039 | 21 |
| 7000080206 | 34 |
| 7000080207 | 34 |
| 7000080239 | 38 |
| 7000080242 | 38 |
| 7000080243 | 38 |
| 7000080245 | 38 |
| 7000080250 | 38 |
| 7000080254 | 38 |
| 7000080396 | 15 |
| 7000080483 | 138 |
| 7000088347 | 160 |
| 7000088390 | 160 |
| 7000088507 | 163 |
| 7000088508 | 163 |
| 7000088515 | 159 |
| 7000088515 | 159 |
| 7000088518 | 159 |
| 7000088544 | 159 |
| 7000088544 | 107 |
| | |
| 7000095179 | 45 |
| 7000095240 | 198 |
| 7000095243 | 199 |
| 7000095244 | 150 |
| 7000095261 | 150 |

| Product ID | Page |
|------------|------|
| 7000095268 | 150 |
| 7000095271 | 197 |
| 7000095309 | 150 |
| 7000095343 | 200 |
| 7000095375 | 200 |
| 7000095394 | 199 |
| 7000095395 | 199 |
| 7000095396 | 199 |
| 7000095412 | 199 |
| 7000095434 | 198 |
| 7000095437 | 198 |
| 7000095540 | 198 |
| 7000095541 | 198 |
| 7000095558 | 200 |
| 7000095570 | 152 |
| 7000095572 | 152 |
| 7000095574 | 152 |
| | - |
| 7000095576 | 152 |
| 7000095577 | 152 |
| 7000095579 | 152 |
| 7000095580 | 200 |
| 7000095581 | 197 |
| 7000095690 | 153 |
| 7000095691 | 153 |
| 7000095694 | 152 |
| 7000095695 | 152 |
| 7000095696 | 152 |
| 7000095715 | 198 |
| 7000095843 | 150 |
| 7000095844 | 150 |
| 7000095876 | 150 |
| 7000095896 | 198 |
| 7000096162 | 143 |
| 7000096245 | 80 |
| 7000096247 | 81 |
| 7000096248 | 80 |
| 7000096250 | 80 |
| 7000110554 | 27 |
| 7000110555 | 27 |
| 7000111459 | 166 |
| 7000111460 | 166 |
| 7000111461 | 166 |
| 7000111462 | 166 |
| 7000111463 | 166 |
| 7000111464 | 166 |
| 7000111465 | 166 |
| 7000111466 | 166 |
| 7000111467 | 166 |
| 7000111468 | 166 |
| 7000111469 | 166 |
| 7000111470 | 166 |
| 7000111471 | 166 |
| 7000111472 | 166 |
| 7000111473 | 166 |
| 7000111474 | 166 |
| 7000111475 | 166 |
| 7000111476 | 166 |
| 7000111477 | 166 |
| | 100 |

| Product ID | Page |
|--------------------------|------|
| 7000111478 | 166 |
| 7000111479 | 166 |
| 7000111480 | 166 |
| 7000111483 | 166 |
| 7000111484 | 166 |
| 7000111485 | 166 |
| 7000111486 | 166 |
| 7000111487 | 166 |
| 7000111488 | 166 |
| 7000111490 | 166 |
| 7000111526 | 115 |
| 7000111527 | 115 |
| 7000111533 | 104 |
| 7000111534 | 104 |
| 7000111535 | 104 |
| 7000111549 | 143 |
| 7000111563 | 81 |
| 7000111564 | 81 |
| 7000111566 | 81 |
| 7000111971 | 143 |
| 7000111987 | 115 |
| 7000111993 | 143 |
| 7000115525 | 110 |
| 7000115640 | 110 |
| 7000115647 | 108 |
| 7000115660 | 109 |
| 7000115666 | 109 |
| 7000115671 | 109 |
| 7000115673 | 110 |
| 7000115755 | 100 |
| 7000115779 7000115869 | 193 |
| 7000115809 | 193 |
| 7000115873 | 105 |
| 7000115874 | 105 |
| 7000115875 | 105 |
| 7000115876 | 105 |
| 7000115982 | 187 |
| 7000116019 | 80 |
| 7000116021 | 80 |
| 7000116029 | 79 |
| 7000116031 | 79 |
| 7000116033 | 79 |
| 7000116065 | 217 |
| 7000116069 | 217 |
| 7000116071 | 218 |
| 7000116080 | 218 |
| 7000116101 | 219 |
| 7000116117 | 217 |
| 7000116118 | 215 |
| 7000116134 | 220 |
| 7000116136 | 220 |
| 7000116176 | 214 |
| 7000116350 | 222 |
| 7000116354 | 219 |
| 7000116365 | 227 |
| 7000116511 | 179 |
| 7000116515 | 178 |
| | |

| Product ID | Page |
|------------|------|
| 7000116516 | 177 |
| 7000116517 | 177 |
| 7000116521 | 176 |
| 7000116528 | 176 |
| 7000116530 | 176 |
| 7000116531 | 176 |
| 7000116554 | 108 |
| 7000116555 | 108 |
| 7000116558 | 108 |
| 7000116559 | 108 |
| 7000116560 | 108 |
| 7000116561 | 108 |
| 7000116576 | 114 |
| 7000116585 | 107 |
| 7000116587 | 108 |
| 7000116590 | 114 |
| 7000116594 | 113 |
| 7000116595 | 113 |
| 7000116596 | 113 |
| 7000116597 | 113 |
| 7000116611 | 94 |
| 7000116615 | 108 |
| 7000116623 | 110 |
| 7000116631 | 92 |
| 7000116632 | 92 |
| 7000116634 | 92 |
| 7000116636 | 108 |
| 7000116638 | 93 |
| 7000116639 | 93 |
| 7000116640 | 95 |
| 7000116641 | 95 |
| 7000116642 | 94 |
| 7000116643 | 94 |
| 7000116644 | 93 |
| 7000116648 | 108 |
| 7000116652 | 94 |
| 7000116653 | 94 |
| 7000116655 | 108 |
| 7000116656 | 108 |
| 7000116657 | 108 |
| 7000116658 | 93 |
| 7000116659 | 95 |
| 7000116661 | 93 |
| 7000116664 | 108 |
| 7000116666 | 108 |
| 7000116670 | 107 |
| 7000116671 | 92 |
| 7000116672 | 92 |
| 7000116673 | 92 |
| 7000116674 | 92 |
| 7000116675 | 92 |
| 7000116772 | 33 |
| 7000116775 | 33 |
| 7000116779 | 33 |
| 7000116782 | 37 |
| 7000116787 | 34 |
| 7000116790 | 34 |
| 7000116822 | 37 |
| | |

| Product ID | Page |
|------------|----------|
| 7000122466 | 193 |
| 7000123279 | 113 |
| 7000123281 | 113 |
| 7000124799 | 129 |
| 7000144706 | 139 |
| 7000144707 | 139 |
| 7000144708 | 139 |
| 7000144794 | 148 |
| 7000146617 | 209 |
| 7000147746 | 154 |
| 7010012127 | 68 |
| 7010292805 | 141 |
| 7010300467 | 169 |
| 7100002405 | 170 |
| 7100003021 | 75 |
| 7100003056 | 155 |
| 7100003571 | 212 |
| | |
| 7100003930 | 153 |
| | 41 39 |
| 7100007793 | |
| 7100008116 | 217 |
| 7100008178 | 42 |
| 7100008737 | 43 |
| 7100008738 | 40 |
| 7100009003 | 184 |
| 7100009195 | 40 |
| 7100009688 | 22 |
| 7100009898 | 228 |
| 7100009949 | 212 |
| 7100010005 | 214 |
| 7100010680 | 19 |
| 7100011056 | 22 |
| 7100011610 | 39 |
| 7100011658 | 189 |
| 7100011792 | 214 |
| 7100011840 | 213 |
| 7100012241 | 111 |
| 7100012272 | 110 |
| 7100013330 | 213 |
| 7100013721 | 214 |
| 7100015263 | 139 |
| 7100015266 | 140 |
| 7100015462 | 38 |
| 7100016326 | 163 |
| 7100016838 | 94 |
| 7100017793 | 128 |
| 7100020027 | 128 |
| 7100020333 | 41 |
| 7100020334 | 43 |
| 7100020336 | 43 |
| 7100020337 | 40 |
| 7100020456 | 40 |
| 7100020587 | 86 |
| 7100021266 | 85 |
| 7100021268 | 85 |
| 7100021269 | 86 |
| 7100021280 | 86 |
| 7100021281 | 86 |
| | |

| Product ID | Page |
|------------|------|
| 7100021282 | 86 |
| 7100021283 | 85 |
| 7100021285 | 86 |
| 7100021286 | 85 |
| 7100021933 | 85 |
| 7100022040 | 85 |
| 7100023018 | 44 |
| 7100023053 | 41 |
| 7100023282 | 85 |
| 7100023283 | 85 |
| 7100023942 | 220 |
| 7100024045 | 23 |
| 7100024055 | 23 |
| 7100024083 | 219 |
| 7100024646 | 86 |
| 7100024647 | 85 |
| 7100025020 | 202 |
| 7100025154 | 39 |
| 7100025246 | 42 |
| 7100026753 | 86 |
| 7100027084 | 171 |
| 7100027085 | 171 |
| 7100027507 | 52 |
| 7100027510 | 28 |
| 7100027855 | 175 |
| 7100027856 | 175 |
| 7100027905 | 225 |
| 7100028023 | 175 |
| 7100028055 | 176 |
| 7100029174 | 83 |
| 7100029175 | 83 |
| 7100029176 | 84 |
| 7100029188 | 83 |
| 7100029348 | 38 |
| 7100029518 | 38 |
| 7100030363 | 83 |
| 7100030935 | 84 |
| 7100031009 | 84 |
| 7100031031 | 83 |
| 7100031051 | 83 |
| 7100031061 | 83 |
| 7100031064 | 84 |
| 7100032063 | 70 |
| 7100032985 | 87 |
| 7100033657 | 29 |
| 7100033708 | 29 |
| 7100033726 | 29 |
| 7100033985 | 29 |
| 7100034008 | 30 |
| 7100034060 | 29 |
| 7100034061 | 28 |
| 7100034071 | 29 |
| 7100034072 | 30 |
| 7100034078 | 29 |
| 7100034279 | 30 |
| 7100034525 | 29 |
| 7100036550 | 35 |
| 7100036717 | 17 |

| Product ID | Page |
|--------------------------|-----------|
| 7100036719 | 17 |
| 7100037923 | 113 |
| 7100038272 | 35 |
| 7100038427 | 84 |
| 7100038584 | 97 |
| 7100038631 | 97 |
| 7100038656 | 96 |
| 7100038693 | 97 |
| 7100038810 | 97 |
| 7100038865 | 30 |
| 7100038866 | 28 |
| 7100038963 | 97 |
| 7100039117 | 99 |
| 7100039155 | 105 |
| 7100039413 | 99 |
| 7100039416 7100039641 | 102 98 |
| 7100039642 | 98 |
| 7100039643 | 98 |
| 7100039644 | 98 |
| 7100039645 | 99 |
| 7100039678 | 142 |
| 7100039714 | 105 |
| 7100039813 | 100 |
| 7100040285 | 99 |
| 7100040287 | 99 |
| 7100040288 | 98 |
| 7100040289 | 102 |
| 7100040300 | 97 |
| 7100040451 | 96 |
| 7100040452 | 96 |
| 7100040453 | 99 |
| 7100040454 | 100 |
| 7100040455 | 101 |
| 7100040836 | 28 142 |
| 7100041614 | 142 |
| 7100041928 | 159 |
| 7100042087 | 21 |
| 7100042890 | 158 |
| 7100042893 | 158 |
| 7100042894 | 158 |
| 7100042895 | 158 |
| 7100042898 | 157 |
| 7100042899 | 157 |
| 7100042900 | 157 |
| 7100042901 | 157 |
| 7100042902 | 157 |
| 7100042903 | 157 |
| 7100042904 | 157 |
| 7100042954 | 157 |
| 7100042956 | 157 |
| 7100042957 | 157 |
| 7100042958 | 158 |
| 7100042982 | 158 |
| 7100044127 | 41 |
| 7100044170 | 136 |
| 7100044183 | 158 |

| Product ID | Page |
|------------|------|
| 7100044184 | 158 |
| 7100044184 | 158 |
| 7100044186 | 158 |
| 7100044284 | 160 |
| 7100044286 | 160 |
| 7100044325 | 156 |
| 7100044328 | 156 |
| 7100044331 | 138 |
| 7100044391 | 157 |
| 7100044392 | 157 |
| 7100044640 | 136 |
| 7100044646 | 137 |
| 7100044656 | 136 |
| 7100044924 | 175 |
| 7100046034 | 160 |
| 7100046035 | 160 |
| 7100046036 | 160 |
| 7100046037 | 160 |
| 7100046038 | 160 |
| 7100046038 | 160 |
| 7100048039 | 160 |
| 7100048944 | 222 |
| 7100048344 | 136 |
| 7100049339 | 130 |
| 7100049885 | 196 |
| 7100053516 | 150 |
| 7100053595 | 130 |
| 7100053595 | 142 |
| | |
| 7100053598 | 142 |
| 7100053638 | 142 |
| 7100053838 | 142 |
| 7100053924 | 142 |
| 7100054963 | 196 |
| 7100055238 | 190 |
| 7100055238 | 162 |
| 7100055259 | |
| 7100055250 | 162 |
| | 162 |
| 7100055252 | 162 |
| 7100055258 | 140 |
| | 140 |
| 7100055835 | |
| 7100056217 | 140 |
| | 140 |
| 7100059421 | |
| 7100062075 | 45 |
| 7100062076 | 45 |
| 7100062077 | 45 |
| 7100065027 | 156 |
| | 146 |
| 7100067297 | 26 |
| 7100068120 | 26 |
| 7100069366 | 26 |
| 7100069498 | 11 |
| 7100071665 | 136 |
| 7100071754 | 70 |
| 7100072934 | 221 |
| 7100072947 | 227 |
| | |

| Product ID | Page |
|--------------------------|----------|
| 7100073000 | 100 |
| 7100073737 | 227 |
| 7100075409 | 25 |
| 7100075712 | 227 |
| 7100076727 | 13 |
| 7100077148 | 18 |
| 7100077297 | 45 |
| 7100078074 | 45 |
| 7100078165 | 23 |
| 7100078166 | 23 |
| 7100079530 | 178 |
| 7100079680 | 177 |
| 7100080091 | 178 |
| 7100080092 | 177 |
| 7100080096 | 177 |
| 7100080100 | 178 |
| 7100080101 | 178 |
| 7100082436 | 46 |
| 7100082438 | 46 |
| 7100082441 | 46 |
| 7100082565 7100082716 | 18 46 |
| 7100082718 | 38 |
| 7100083334 | 101 |
| 7100084307 | 169 |
| 7100084588 | 13 |
| 7100085670 | 116 |
| 7100085671 | 116 |
| 7100085845 | 116 |
| 7100085854 | 116 |
| 7100086291 | 105 |
| 7100086951 | 171 |
| 7100086952 | 171 |
| 7100086953 | 171 |
| 7100086954 | 171 |
| 7100087075 | 171 |
| 7100087076 | 172 |
| 7100087488 | 171 |
| 7100089302 | 206 |
| 7100089374 | 103 |
| 7100089375 | 103 |
| 7100089475 | 21 |
| 7100089476 | 21 |
| 7100089499 | 90 |
| 7100089541 | 91 |
| 7100089545 | 88 |
| 7100089546 | 88 |
| 7100089547 | 88 |
| 7100089548 7100089550 | 88 88 |
| 7100089550 | 88 |
| 7100089553 | 88 |
| 7100089779 | 172 |
| 7100090427 | 90 |
| 7100097574 | 25 |
| 7100097636 | 25 |
| 7100098631 | 25 |
| 7100098643 | 167 |
| | |

| Product ID | Page |
|--------------------------|------------|
| 7100098687 | |
| 7100098695 | 168 168 |
| 7100098093 | 167 |
| 7100098737 | 158 |
| 7100099833 | 62 |
| 7100099833 | 62 |
| | |
| 7100099836 7100100752 | 62 |
| | 62 |
| 7100100753 | 62 |
| 7100100757 7100100910 | 63 171 |
| 7100100910 | 62 |
| 7100101042 | 63 |
| 7100101043 | 63 |
| 7100101043 | 170 |
| 7100101074 | 62 |
| 7100101623 | 62 |
| 7100101824 | 215 |
| | |
| 7100104630 | 218 |
| 7100104634 7100104640 | 217 |
| 7100104648 | 226 213 |
| 7100104650 | 213 |
| 7100104650 | 225 |
| 7100104655 | 227 |
| 7100104656 | 215 |
| 7100104657 | 227 |
| 7100104658 | 215 |
| 7100104659 | 226 |
| 7100104660 | 226 |
| 7100104661 | 226 |
| 7100104662 | 215 |
| 7100104663 | 215 |
| 7100104664 | 222 |
| 7100104665 | 219 |
| 7100104666 | 218 |
| 7100104667 | 218 |
| 7100104668 | 218 |
| 7100104669 | 218 |
| 7100104670 | 219 |
| 7100104671 | 227 |
| 7100104672 | 227 |
| 7100104673 | 227 |
| 7100104674 | 228 |
| 7100104675 | 228 |
| 7100104678 | 217 |
| 7100104679 | 217 |
| 7100104680 | 217 |
| 7100104681 | 220 |
| 7100104682 | 215 |
| 7100104683 | 216 |
| 7100104684 | 219 |
| 7100104685 | 225 |
| 7100104686 | 227 |
| 7100104687 7100104688 | 227 227 |
| 7100104688 | 227 |
| 7100104690 | 212 |
| 100104081 | 212 |

| 7100104692 2 7100104693 2 | ige |
|---|-----|
| 7100104693 | |
| | 215 |
| 7100104695 | 227 |
| | 215 |
| 7100104697 | 215 |
| 7100104699 2 | 227 |
| 7100104701 2 | 227 |
| 7100104702 2 | 227 |
| 7100104720 2 | 227 |
| 7100104721 2 | 227 |
| 7100104725 2 | 227 |
| 7100104726 2 | 227 |
| 7100104728 | 215 |
| 7100104729 2 | 227 |
| 7100104730 2 | 226 |
| 7100104734 | 217 |
| 7100104736 2 | 223 |
| 7100104743 2 | 227 |
| 7100104745 2 | 227 |
| | 227 |
| | 227 |
| | 227 |
| | 227 |
| | 224 |
| | 215 |
| | 215 |
| 7100104769 | 90 |
| 7100104789 | |
| | 90 |
| 7100104771 | 91 |
| 7100104774 | 89 |
| 7100104775 | 89 |
| 7100104776 | 96 |
| 7100104780 | 83 |
| | 103 |
| 7100104783 | 83 |
| 7100104784 | 84 |
| 7100104786 | 97 |
| 7100104791 | 84 |
| 7100104792 | 84 |
| 7100104793 | 97 |
| 7100104794 | 85 |
| 7100104795 | 88 |
| 7100104796 | 88 |
| 7100104797 | 89 |
| 7100104798 1 | 106 |
| 7100104799 | 109 |
| 7100104800 | 109 |
| 7100104801 | 110 |
| 7100104803 | 85 |
| 7100104804 | 86 |
| 7100105384 | 22 |
| 7100107033 | 53 |
| | 170 |
| | 129 |
| | 126 |
| | 129 |
| | 129 |
| | 129 |
| | 125 |
| 7100108755 | 129 |

| Product ID | Page |
|--------------------------|------------|
| 7100108756 | 125 |
| 7100108764 | 125 |
| 7100108887 | 170 |
| 7100108888 | 170 |
| 7100109827 | 20 |
| 7100109828 | 20 |
| 7100109829 | 20 |
| 7100109830 | 20 |
| 7100110454 | 226 |
| 7100116406 | 53 |
| 7100117487 | 106 |
| 7100123266 | 122 |
| 7100123339 | 126 |
| 7100123340 | 128 |
| 7100123347 | 129 |
| 7100123355 | 70 |
| 7100123358 | 65 |
| 7100123727 | 122 |
| 7100131817 | 106 |
| 7100132669 | 106 |
| 7100132671 | 52 |
| 7100135038 | 171 |
| 7100135318 | 200 |
| 7100135321 | 200 |
| 7100135324 | 200 |
| 7100135720 | 156 |
| 7100135737 | 156 |
| 7100135739 | 156 |
| 7100135746 | 201 |
| 7100135748 | 156 |
| 7100135749 | 201 |
| 7100135750 | 200 |
| 7100135752 | 201 |
| 7100135755 | 201 |
| 7100135761 | 156 |
| 7100135774 | 201 182 |
| 7100136272 | 182 |
| 7100136273 | - |
| 7100136277 7100136278 | 182 182 |
| 7100136283 | 183 |
| 7100136285 | 181 |
| 7100136558 | 181 |
| 7100136620 | 181 |
| 7100136621 | 181 |
| 7100137064 | 183 |
| 7100137163 | 169 |
| 7100137182 | 169 |
| 7100138125 | 37 |
| 7100140400 | 14 |
| 7100140578 | 14 |
| 7100141716 | 14 |
| 7100141727 | 14 |
| 7100141986 | 14 |
| 7100143305 | 60 |
| 7100143306 | 61 |
| 7100143321 | 61 |
| 7100143322 | 60 |
| | |

| Product ID | Page |
|------------|------|
| 7100143323 | 61 |
| 7100143324 | 61 |
| 7100143325 | 61 |
| 7100143327 | 60 |
| 7100143328 | 61 |
| 7100143701 | 20 |
| 7100143961 | 20 |
| 7100144053 | 152 |
| 7100144090 | 150 |
| 7100144121 | 200 |
| 7100144123 | 200 |
| 7100144124 | 200 |
| 7100144147 | 200 |
| 7100146162 | 201 |
| 7100146490 | 199 |
| 7100146500 | 201 |
| 7100146753 | 160 |
| 7100148731 | 18 |
| 7100148736 | 19 |
| 7100148737 | 20 |
| 7100148738 | 19 |
| 7100148750 | 11 |
| 7100148758 | 19 |
| 7100148760 | 11 |
| 7100148766 | 49 |
| 7100152063 | 194 |
| 7100152066 | 188 |
| 7100152421 | 189 |
| 7100152422 | 189 |
| 7100153134 | 89 |
| 7100154121 | 60 |
| 7100154122 | 61 |
| 7100154123 | 61 |
| 7100156413 | 145 |
| 7100156415 | 145 |
| 7100158345 | 165 |
| 7100158346 | 164 |
| 7100158365 | 165 |
| 7100158377 | 164 |
| 7100158390 | 164 |
| 7100158521 | 51 |
| 7100158584 | 51 |
| 7100160307 | 196 |
| 7100166745 | 216 |
| 7100166746 | 216 |
| 7100167269 | 145 |
| 7100167276 | 145 |
| 7100167280 | 145 |
| 7100167284 | 145 |
| 7100169890 | 224 |
| 7100174104 | 165 |
| 7100174105 | 165 |
| 7100174265 | 215 |
| 7100174270 | 223 |
| 7100174271 | 223 |
| 7100174272 | 223 |
| 7100174284 | 222 |
| 7100174304 | 215 |
| | |

| Product ID | Page |
|------------|------|
| 7100178336 | 56 |
| 7100178338 | 56 |
| 7100179264 | 22 |
| 7100179480 | 22 |
| 7100179482 | 22 |
| 7100180981 | 56 |
| 7100181129 | 223 |
| 7100181130 | 215 |
| 7100181760 | 171 |
| 7100185158 | 16 |
| 7100185187 | 17 |
| 7100185368 | 218 |
| 7100193857 | 162 |
| 7100193900 | 66 |
| 7100193935 | 65 |
| 7100193936 | 66 |
| 7100195214 | 66 |
| 7100195888 | 156 |
| 7100195952 | 156 |
| 7100196060 | 156 |
| 7100196061 | 156 |
| 7100196064 | 156 |
| 7100200484 | 11 |
| 7100200485 | 12 |
| 7100200486 | 12 |
| 7100200487 | 12 |
| 7100200488 | 13 |
| 7100200489 | 13 |
| 7100200490 | 13 |
| 7100200492 | 18 |
| 7100200493 | 18 |
| 7100200496 | 14 |
| 7100200498 | 14 |
| 7100200499 | 15 |
| 7100200501 | 15 |
| 7100200502 | 15 |
| 7100200503 | 15 |
| 7100200505 | 16 |
| 7100200506 | 16 |
| 7100200508 | 16 |
| 7100205939 | 210 |
| 7100207277 | 146 |
| 7100207280 | 146 |
| 7100207284 | 146 |
| 7100207286 | 146 |
| 7100211808 | 146 |
| 7100211813 | 68 |
| 7100211815 | 67 |
| 7100211816 | 67 |
| 7100211819 | 67 |
| 7100211820 | 67 |
| 7100211821 | 67 |
| 7100211822 | 67 |
| 7100211824 | 67 |
| 7100211826 | 68 |
| 7100211827 | 68 |
| 7100211828 | 68 |
| 7100211830 | 68 |

| Due duet ID | D |
|--------------------------|-----------|
| Product ID | Page |
| 7100211831 | 68 |
| 7100211832 | 68 |
| 7100211833 | 68 |
| 7100211834 | 68 |
| 7100211835 | 69 |
| 7100211836 | 69 |
| 7100211838 | 69 |
| 7100211839 | 69 |
| 7100211840 | 69 |
| 7100214419 | 129 |
| 7100215092 | 197 |
| 7100215467 | 197 |
| 7100215511 | 197 |
| 7100216187 | 197 |
| 7100220358 | 199 |
| 7100220442 | 199 |
| 7100220792 | 92 |
| 7100221270 | 147 |
| 7100223650 | 92 |
| 7100223836 | 69 |
| 7100224321 | 92 |
| 7100224385 | 92 |
| 7100224762 | 92 |
| 7100225996 | 92 |
| 7100225997 | 92 |
| 7100226020 | 92 |
| 7100226149 | 215 |
| 7100226380 | 92 |
| 7100226547 | 154 |
| 7100226808 | 149 |
| 7100227350 | 62 |
| 7100230550 | 142 |
| 7100230552 | 142 |
| 7100232802 | 23 |
| 7100233348 | 24 |
| 7100233349 | 24 |
| 7100233359 | 23 |
| 7100238539 | 117 |
| 7100240965 | 21 |
| 7100243948 | 92 |
| 7100243949 | 92 |
| 7100243950 | 92 |
| 7100243951 | 92 |
| 7100244477 | 24 |
| 7100244478 | 24 |
| 7100244480 7100244653 | 25 210 |
| 7100244858 | 210 |
| 7100244858 | 23 |
| 7100245039 | 24 |
| 7100245634 | 143 |
| 7100246043 | 26 |
| 7100246046 | 26 |
| 7100246871 | 186 |
| 7100247155 | 61 |
| 7100247156 | 60 |
| 7100247163 | 186 |
| 7100247164 | 186 |
| | |

| Product ID | Paga |
|------------|------|
| | Page |
| 7100247165 | 187 |
| 7100247166 | 187 |
| 7100247250 | 186 |
| 7100247251 | 186 |
| 7100248469 | 136 |
| 7100248651 | 136 |
| 7100249185 | 135 |
| 7100251992 | 135 |
| 7100251993 | 135 |
| 7100251995 | 135 |
| 7100253141 | 135 |
| 7100253142 | 135 |
| 7100253513 | 135 |
| 7100253517 | 135 |
| 7100254033 | 135 |
| 7100254034 | 135 |
| 7100254036 | 135 |
| 7100254037 | 135 |
| 7100255954 | 50 |
| 7100255955 | 50 |
| 7100259560 | 208 |
| 7100259561 | 208 |
| 7100259562 | 208 |
| 7100259598 | 136 |
| 7100259699 | 135 |
| 7100259700 | 135 |
| 7100259749 | 136 |
| 7100259750 | 136 |
| 7100260043 | 135 |
| 7100260125 | 137 |
| 7100260160 | 136 |
| 7100260161 | 136 |
| 7100260162 | 136 |
| 7100260268 | 156 |
| 7100260269 | 156 |
| 7100260270 | 156 |
| 7100260271 | 156 |
| 7100260280 | 139 |
| 7100260281 | 139 |
| 7100260282 | 138 |
| 7100260283 | 137 |
| 7100260284 | 140 |
| 7100260285 | 139 |
| 7100260286 | 139 |
| 7100260287 | 139 |
| 7100260288 | 139 |
| 7100260301 | 137 |
| | 137 |
| 7100260472 | |
| 7100260574 | 208 |
| 7100260577 | 137 |
| 7100260578 | 136 |
| 7100260579 | 137 |
| 7100260582 | 137 |
| 7100260585 | 137 |
| 7100260586 | 137 |
| 7100260587 | 137 |
| 7100260588 | 137 |
| 7100260598 | 137 |
| | |

| Product ID | Page |
|--------------------------|----------|
| 7100260599 | 139 |
| 7100260600 | 139 |
| 7100260619 | 136 |
| 7100260621 | 135 |
| 7100260624 | 135 |
| 7100260625 | 135 |
| 7100260696 | 137 |
| 7100260697 | 137 |
| 7100260855 | 137 |
| 7100262488 | 49 |
| 7100262507 | 77 |
| 7100262508 | 77 |
| 7100262590 | 76 |
| 7100262602 | 77 |
| 7100262606 | 77 |
| 7100262607 | 77 |
| 7100262608 | 77 |
| 7100262608 | 76 |
| 7100262616 | 76 |
| 7100262619 | 76 |
| 7100262858 | 77 |
| 7100263680 | 167 |
| 7100263680 | 167 |
| 7100263682 | 167 |
| 7100263683 | 167 |
| 7100264010 | 91 |
| 7100268065 | 60 |
| 7100269550 | 91 |
| 7100269551 | 91 |
| 7100269552 | 91 |
| 7100269603 | 91 |
| 7100269604 | 91 |
| 7100269702 | 91 |
| 7100269704 | 91 |
| 7100269705 | 91 |
| 7100269834 | 91 |
| 7100269835 | 91 |
| 7100269978 | 15 |
| 7100269979 | 15 |
| 7100269980 | 14 |
| 7100270164 | 14 |
| 7100276858 | 91 |
| 7100279337 | 126 |
| 7100279420 | 126 |
| 7100279569 | 126 |
| 7100279570 | 126 |
| 7100279571 | 127 |
| 7100279572 | 127 |
| 7100279603 | 127 |
| 7100279613 | 127 |
| 7100279614 | 127 |
| 7100279680 | 176 |
| 7100280536 | 161 |
| 7100280538 | 161 |
| 7100281475 | 161 |
| 7100283265 7100283355 | 52 52 |
| 7100285855 | 72 |
| . 100200014 | 12 |

| Product ID | Page |
|------------|------|
| 7100285875 | 71 |
| 7100285876 | 72 |
| 7100288303 | 61 |
| 7100288968 | 169 |
| 7100288972 | 169 |
| 7100289033 | 169 |
| 7100289034 | 170 |
| 7100289108 | 170 |
| 7100297050 | 62 |
| 7100297127 | 62 |
| 7100297128 | 62 |
| 7100297129 | 62 |
| 7100297479 | 63 |
| 7100304367 | 49 |
| 7100307034 | 74 |
| 7100307057 | 73 |
| 7100307059 | 73 |
| 7100307061 | 74 |
| 7100307062 | 74 |
| 7100307226 | 73 |
| 7100307922 | 229 |
| 7100307924 | 229 |
| 7100307925 | 229 |
| 7100307932 | 224 |
| 7100308327 | 228 |
| 7100309726 | 74 |
| 7100309727 | 73 |
| 7100309728 | 73 |
| 7100309729 | 72 |
| 7100309730 | 71 |
| 7100309731 | 72 |
| 7100309949 | 74 |
| 7100309969 | 73 |
| 7100310930 | 74 |
| 7100311466 | 230 |
| 7100312118 | 87 |
| 7100312119 | 87 |
| 7100312120 | 86 |
| 7100321905 | 86 |
| 7100321906 | 87 |
| 7100321907 | 87 |
| 7100321954 | 86 |
| | |

<u>3M TERMS OF SALE</u>

1. Application

1.1 These conditions apply to all contracts between 3M and the Buyer referred to in the order and override all conditions stipulated by the Buyer (even if submitted in a later document); any other agreements between the parties relating to the subject matter of this order are terminated (except an agreement into which these conditions are incorporated).

1.2 No variation of these conditions is permitted unless agreed in writing by an authorised officer of 3M. Lead times for delivery shall be as set out in 3M's quotation or proposal or if none is specified 3M's standard lead times shall apply.

2. Description

2.1 The description of the goods or services to be supplied by 3M shall be as set out in 3M's quotation, as modified by any written specification supplied by 3M, or otherwise agreed in writing by an authorised officer of 3M.

2.2 3M may amend any specification if required by any applicable statute or regulation, or by notification to the Buyer following which the applicable specification shall be that as so amended.

2.3 All samples, drawings, images, descriptive matter and advertising materials produced by 3M and any descriptions or illustrations contained in 3M's literature, digital media or emails are produced solely to describe the goods or services approximately and do not form part of the agreement into which these conditions are incorporated.

3. Price

3.1 Save where expressly stated otherwise by 3M the price to be paid for the goods or the services will be 3M's price at the date when the goods are dispatched or the services are provided.

3.2 The price of goods includes the cost of 3M's standard packaging and standard delivery within the UK and Ireland by 3M's normal transportation; the price does not include VAT. Where the price is based on pallets and/or packaging being returned to 3M, then failure to do so by the Buyer will result in a surcharge at 3M's standard rate.

4. Payment

4.1 Unless otherwise specified on 3M's invoice, payment for the goods or services must be received in cleared funds no later than thirty days of the date of invoice.

4.2 3M reserves the right to charge interest on overdue sums at the rate of 4% per annum above the Base Rate for the time being of Lloyds Bank plc calculated on a daily basis from the due date of payment in Clause 4.1 until the date upon which payment is made.

4.3 3M may at any time require the Buyer to make payment in advance of delivery or require security for payment.

4.4 If the Buyer fails to make payment by the due date or when required, 3M may (without prejudice to any other remedy which it may have) cancel this contract and/or any other contract between the Buyer and 3M and/or suspend delivery under this or any other contract until payment is made.

4.5 The Buyer will have no statutory or other right of set off.

5. Delivery

5.1 Delivery dates are approximate only and 3M shall not be responsible for any loss or damage arising from any delay in delivering all or part of any goods ordered or delay in the provision of any services.

5.2 Without prejudice to Clause 5.1, 3M will not be liable for any delay in delivery or non-delivery of goods or services or any other breach of these conditions caused by any circumstances beyond 3M's reasonable control including without limitation, any Act of God, explosion, fire, flood, war, hostilities, accident, delay in delivery or non-delivery by 3M's suppliers, breakdowns or accidents to machinery, labour strike or dispute, order or decree of any court or action of any governmental authority, or any other causes or any circumstances beyond 3M's control; on the occurrence of any of the above events 3M reserves the right to cancel or suspend the whole or part of any delivery or service provision.

5.3 In the case of any order for goods of a type or description not normally held in stock by 3M, and therefore specially made ordered or imported by 3M to meet such order, the Buyer will accept goods 10% more or 10% less than ordered, the total price of the order being correspondingly adjusted.

5.4 Where 3M references the international rules for the interpretation of trade terms prepared by the International Chamber of Commerce (Incoterms) in the relevant contract or proposal, such terms shall apply to delivery save that where they conflict with these conditions, these conditions shall prevail. For deliveries outside of the UK mainland the term of sale shall be FCA 3M UK warehouse unless otherwise mutually agreed in writing by 3M and Buyer.

5.5 Goods supplied may be subject to export controls. The Buyer should refer to 3M's packing list accompanying the goods for any export control status.

6. <u>Risk</u>

Risk in all goods supplied to the Buyer will pass to the Buyer on delivery. Unloading shall be at the Buyer's risk.

7. Inspection

7.1 If the goods or any of them are damaged or lost while in the custody of a carrier, 3M will (at its option) either replace such goods or refund to the Buyer the price paid for them, but 3M's liability in connection with any such goods will not exceed the cost of replacement or the price paid by the Buyer.

7.2 3M will not be under any liability under 7.1 above unless the following conditions are strictly complied with:

7.2:1 In the event of non-delivery of a whole consignment of goods the Buyer must inform 3M in writing within ten days of the date of the invoice.

7.2:2 In the case of damage to goods or loss of part of a consignment, the consignment must be inspected in the presence of the carrier. If any goods are damaged or lost the consignment note must be endorsed accordingly and the Buyer must notify 3M within forty-eight hours of delivery, such notification to be confirmed in writing within the following five days. 3M shall have no further liability for such damage or loss.

8. Liabilities and Warranties

8.1 Nothing in this clause will be deemed to exclude or restrict 3M's liability for (i) death or personal injury resulting from its negligence; (ii) fraud or fraudulent misrepresentation; (iii) breach of any obligation as to title implied by section 12 of the Sale of Goods Act 1979; and/or (iv) any act, omission or matter, liability for which may not be legally excluded or limited.

8.2 If any goods supplied or any services supplied or provided by or on behalf of 3M prove on inspection to be defective in material or workmanship, 3M will (at its option) replace the same (or the defective part) or refund to the Buyer the price of the goods or services (or a pro-rated amount of the price if not all the goods are defective).

8.3 The Buyer will determine the suitability of the goods for its intended use and will not rely upon any representations made by or on behalf of 3M.

8.4 3M's liability under these conditions shall never exceed the cost of replacement or the price paid by the Buyer for the goods or services.

8.5 3M will not be liable for any consequential or indirect loss or damage (whether for loss of profit, loss of business, depletion of goodwill or otherwise) costs, expenses or other claims for consequential compensation whatsoever suffered by the Buyer whether this loss or damage arises from a breach of duty, in contract or in tort or in any other way (including loss or damage arising from 3M's negligence).

8.6 The Buyer shall at all times comply with standards of business conduct that are consistent with 3M's Code of Conduct located at <u>www.3m.com/businessconduct and</u> all applicable laws, statutes, regulations and codes relating to anti-bribery including but not limited to the US Foreign Corrupt Practices Act and the UK Bribery Act 2010 ("Bribery Laws") and shall maintain in place its own polices and adequate procedures, to ensure full compliance with the Bribery Laws. The Buyer shall promptly report to 3M any request or demand for any undue financial or other advantage of any kind received by or offered to the Buyer in connection with 3M's goods or services.

8.7 Except as set out in these conditions, all other warranties and conditions, whether express or implied, statutory or otherwise are excluded to the fullest extent permissible at law.

9. Assignment

9.1 3M may assign, or deal in any other manner with, any contract between 3M and Buyer or any part of them, including subcontracting any of its obligations under such contracts to any third party or agent.

9.2 The Buyer shall not be entitled to assign, or deal in any other manner with, any contracts between 3M and Buyer or any part of them, including sub-contracting any of its obligations under such contracts, without the prior written consent of 3M.

10. Termination

If there is appointed a Receiver, Administrator or Administrative Receiver of the Buyer's property or assets or any part of them, or a court order is made or a resolution is passed for the winding-up of the Buyer (except for the purpose of amalgamation or reconstruction) or if the Buyer commits any act of bankruptcy, or any bankruptcy petition is presented against the Buyer (or any analogous proceedings under the law of any country outside the United Kingdom are commenced), 3M may by notice in writing to the Buyer cancel all orders and contracts between 3M and the Buyer or any part of them remaining unfulfilled.

11. <u>General</u>

11.1 If any provision, or part of a provision, of these conditions is found by any court or administrative body of competent jurisdiction to be invalid, illegal or unenforceable (a "void provision") such invalidity, illegality or unenforceability shall not affect the other provisions of the conditions, which shall remain in full force and effect. If a void provision would be valid, legal and enforceable if some part of it were deleted, that void provision shall apply with such modification as may be necessary to make it valid, legal and enforceable it shall be deemed to be deleted.

11.2 No provision of the conditions shall be enforceable under the Contracts (Rights of Third Parties) Act 1999 by any person who is not a party to the contract between 3M and Buyer.

11.3 A failure to exercise, or delay in exercising a right, power or remedy provided to 3M by these conditions or by law does not constitute a waiver of that, or any other, right, power or remedy and shall not (and nor shall any single or partial exercise of any such right, power or remedy) preclude the further exercise of that, or any other, right, power or remedy.

12. Jurisdiction

12.1 All contracts between 3M and the Buyer where the goods are shipped to or services are provided in the Republic of Ireland shall be governed by and construed in accordance with the Laws of the Republic of Ireland, and the Buyer agrees to submit to the jurisdiction of the Courts of law in the Republic of Ireland in respect of them.

12.2 Except as provided above, all contracts between 3M and the Buyer shall be governed by and construed in accordance with the Laws of England, and the Buyer agrees to submit to the jurisdiction of the Courts of law in England in respect of them.

Effective 1 January 2017

O teu distribuidor 3M autorizado:



SIGA-NOS EM:

www.facebook.com/CunhaMendesCunhaLda



- - - -

www.youtube.com/c/CUNHAMENDESCUNHALDA

www.cmc.pt

Zona Industrial do Socorro, Lote 28A 4820-011 São Gens - Fafe - Portugal