

**LEISTER**

PLASTIC WELDING

# TRIAC ST

Design meets experience



# TRIAC AT

Robust and intelligent



[www.cmc.pt](http://www.cmc.pt)

**We know how.**

# TRIAC ST – Design meets experience

The new TRIAC ST from Leister is primarily used for welding and plastic fabrication. During its development, a deliberate choice was made to do without extra technical features. Instead it is distinguished by comfort, being reliable versatile, robust and user friendly, like its predecessor the TRIAC S. A prominent feature here is the two-component handle, which is not only attractive, but also gives the user perfect grip. The low weight of less than 1 kg/2.18 lbs ensures a perfect weight balance.

## Product advantage

1



**Ergonomic handling:**  
The 2-component handle and perfect tool balance ensure ideal grip and optimum working even under the toughest conditions.

**Perfect weight:**  
Weighing less than 1 kg, the TRIAC ST is even lighter than its predecessor.

2



**Always keeps a cool head:**  
There is an actively cooled protective tube for greater work safety.

3



**Welding power:**  
Thanks to the optimized, highly robust motor, TRIAC ST guarantees high welding power.

2



1

3

4

5

4



**Reliability:**  
A new temperature manager and a high dust resistance provide the heating elements with a long service life.

5



**Swiss thoroughness:**  
The air filters, located on either side, can easily be removed and cleaned. This ensures optimum air flow and maximum power output.

**Optimum protection:**  
The filters offer active protection against moisture and dust.

## TRIAC AT: Robust and intelligent.

The TRIAC AT is an intelligent hot-air hand tool for welding and shrinking plastics that is suitable for on-site use. It is designed for the needs of even the most demanding professional. Every tool undergoes stringent quality checks prior to leaving the factory in Switzerland. This high-quality hot-air hand tool is equipped for all situations. Its universal areas of application are virtually unlimited. The TRIAC AT will continue to prove its merit in any weather condition and is just as effective outside as it is indoors – all during continuous operation.

### Hot-air hand tool

#### TRIAC ST



- Suitable for the work site
- Functional design: two-component handle grip and optimum center of gravity ensure good ergonomics
- Quick clean air filters
- Automatic carbon stop and heating element protection provide automatic protective measures

#### Technical data

Voltage	V~	120 / 230
Frequency	Hz	50 / 60
Power	W	1600 / 1600
Temperature	°C	40 – 700
Air volume (20°C)	l/min	280 (500 at max. temp)
Dynamic pressure	Pa	3000
Ø Nozzle holder	mm	31.5
Emission	dB(A)	67
Size (L × Ø)	mm	338 × 90, handle Ø 56
Weight	kg	<1 (without power cord)
Conformity mark	CE	
Approval mark		
Protection class II		

#### Article No.:

141.308	TRIAC ST, 120 V / 1600 W for push-fit nozzles with UK-plug
141.309	TRIAC ST, 230 V / 1600 W for push-fit nozzles with UK-plug
141.311	TRIAC ST, 230 V / 1600 W for push-fit nozzles with CH plug
141.227	TRIAC ST, 230 V / 1600 W for push-fit nozzles with Euro plug
144.013	TRIAC ST, 230 V / 1600 W for screw-on nozzles with Euro plug
153.891	TRIAC ST, 220 V / 1600 W for push-fit nozzles with KR-plug

### Hot-air hand tool

#### TRIAC AT



- Suitable for the work site
- Closed loop controlled temperature
- Open loop controlled air volume
- Intelligent «e-Drive» operating unit
- Ergonomic handling
- Modern design

#### Technical data

Voltage	V~	120 / 230
Frequency	Hz	50 / 60
Power	W	1600 / 1600
Temperature	°C	40 – 620
Air volume (20°C)	l/min	210 - 280 (500 at max. temp)
Dynamic pressure	Pa	1600 - 3000
Ø Nozzle holder	mm	31.5
Emission	dB(A)	67
Size (L × Ø)	mm	338 × 90, handle Ø 56
Weight	kg	1 (without power cord)
Conformity mark	CE	
Approval mark		
Protection class II		

#### Article No.:

141.319	TRIAC AT, 120 V / 1600 W, with UK-plug
141.320	TRIAC AT, 230 V / 1600 W, with UK-plug
141.314	TRIAC AT, 230 V / 1600 W, with Euro-Stecker
141.322	TRIAC AT, 230 V / 1600 W, with CH-Stecker
148.005	TRIAC AT, 220 V / 1600 W, for push-fit nozzles with KR-plug



Overlap welding

## Accessories TRIAC ST / TRIAC AT

	<p>Wide slot nozzle, push-fit  <b>107.123</b> 20 mm, 15° angled  <b>107.132</b> 40 mm, 15° angled  <b>107.133</b> 40 mm, perforated  <b>107.135</b> 40 mm, PTFE-coated  <b>107.129</b> 60 mm for bitumen  <b>107.131</b> 80 mm for bitumen</p> <p>(more: <a href="http://www.leister.com/downloads">www.leister.com "downloads"</a>)</p>		<p><b>107.124</b> 20 mm angled nozzle, 70°, push-fit</p>
	<p>Wide slot nozzle  <b>105.475</b> 20 mm, straight  <b>105.485</b> 25 mm, straight  <b>105.494</b> 30 mm, 15° angled</p>	  	<p><b>105.431</b> 3 mm speed weld nozzle, with small air-slide, push-fit on Ø 5 mm tubular nozzle  <b>105.432</b> 4 mm speed weld nozzle, with small air-slide, push-fit on Ø 5 mm tubular nozzle  <b>105.433</b> 5 mm speed weld nozzle, with small air-slide, push-fit on Ø 5 mm tubular nozzle</p>
	<p><b>105.487</b> Wide slot nozzle 20 mm, curved and angular, with clamping angle inwards</p>	 	<p><b>107.139</b> 4.5 × 12 mm speed weld nozzle for fillet weld, push-fit on Ø 5 mm tubular nozzle  <b>107.137</b> 8 mm speed weld nozzle for tape welding, push-fit on Ø 5 mm tubular nozzle</p>
	<p><b>105.500</b> Wide slot nozzle 20 mm, 120° angled (right) 30° slanted forward openly</p>	  	<p>Speed weld nozzle, push-fit on Ø 5 mm tubular nozzle  <b>106.992</b> 5.7 mm, profile A  <b>106.993</b> 7 mm, profile B  <b>106.989</b> Ø 3 mm  <b>106.990</b> Ø 4 mm  <b>106.991</b> Ø 5 mm</p>
	<p><b>107.130</b> Wide slot nozzle 40mm, 60° bent  <b>107.125</b> 20 mm angled nozzle, 60°, push-fit, for right hander  <b>105.503</b> 20 mm angled nozzle, 60°, push-fit</p>		<p><b>156.470</b> Speed weld nozzle bend Ø 5 mm, push-fit on Ø 4/5 mm tubular nozzle</p>
	<p><b>100.303</b> Ø 5 mm, tubular nozzle, push-fit  <b>105.575</b> Ø 5 x 100 mm, tubular nozzle, push-fit  <b>106.982</b> Ø 5 x 150 mm, extension nozzle, push-fit</p>		
	<p><b>105.576</b> tubular nozzle Ø 5 mm, 90° curved</p>		
	<p><b>106.996</b> Tacking nozzle, push-fit on Ø 5 mm tubular nozzle</p>		

Mirror welding



Draw welding




Shrinking

	<b>105.622</b> Ø 5 mm, tubular nozzle, screw-on
	<b>106.988</b> Tacking nozzle, screw-on
	<b>126.552</b> Ø 4 mm drawing nozzle, screw-on for fluor plastics
	<b>113.666</b> Ø 3 mm drawing nozzle with tacking tip, screw-on
	<b>113.399</b> Ø 4 mm drawing nozzle with tacking tip, screw-on
	<b>113.876</b> Ø 3 mm drawing nozzle without tacking tip, screw-on
	<b>113.874</b> Ø 4 mm drawing nozzle without tacking tip, screw-on
	<b>113.670</b> Drawing nozzle triangular-shaped With tacking tip, screw-on 5.7 mm, profile A
	<b>113.877</b> Without tacking tip, screw-on 5.7 mm, profile A
	<b>106.986</b> Without tacking tip, screw-on 7 mm, profile B
	<b>106.987</b> Without tacking tip 7 × 5.5 mm
	<b>157.717</b> Protection nozzle 31.5 mm, air outlet 23 mm, protection ring 80 mm
	<b>107.344</b> 135 mm welding mirror, push-fit
	<b>143.833</b> Nozzle adapter for screw-on nozzles
	<b>143.332</b> Protection tube for screw-on nozzles (for TRIAC ST until april 2017)
	<b>156.092</b> Protection tube for screw-on nozzles (for TRIAC ST from mai 2017)
	<b>141.375</b> Connection adapter M14 for Ø 21 mm nozzle with plug

	<b>107.324</b> 12 × 10 mm sieve reflector, push-fit on Ø 8 mm tubular nozzle
	<b>107.337</b> 50 × 35 mm sieve reflector, push-fit
	<b>107.338</b> 35 × 20 mm sieve reflector, push-fit
	<b>107.326</b> 25 × 150 mm shell reflector, push-fit
	<b>107.307</b> 27 × 35 mm spoon reflector, push-fit
	<b>107.339</b> 17 × 34 mm soldering reflector, push-fit
	<b>106.128</b> 7.5 mm soldering reflector
	<b>142.717</b> Heating element for TRIAC ST / TRIAC AT, 230 V / 1550 W
	<b>142.718</b> Heating element for TRIAC ST / TRIAC AT, 120 V / 1550 W

More at the new accessories catalog at

General accessories

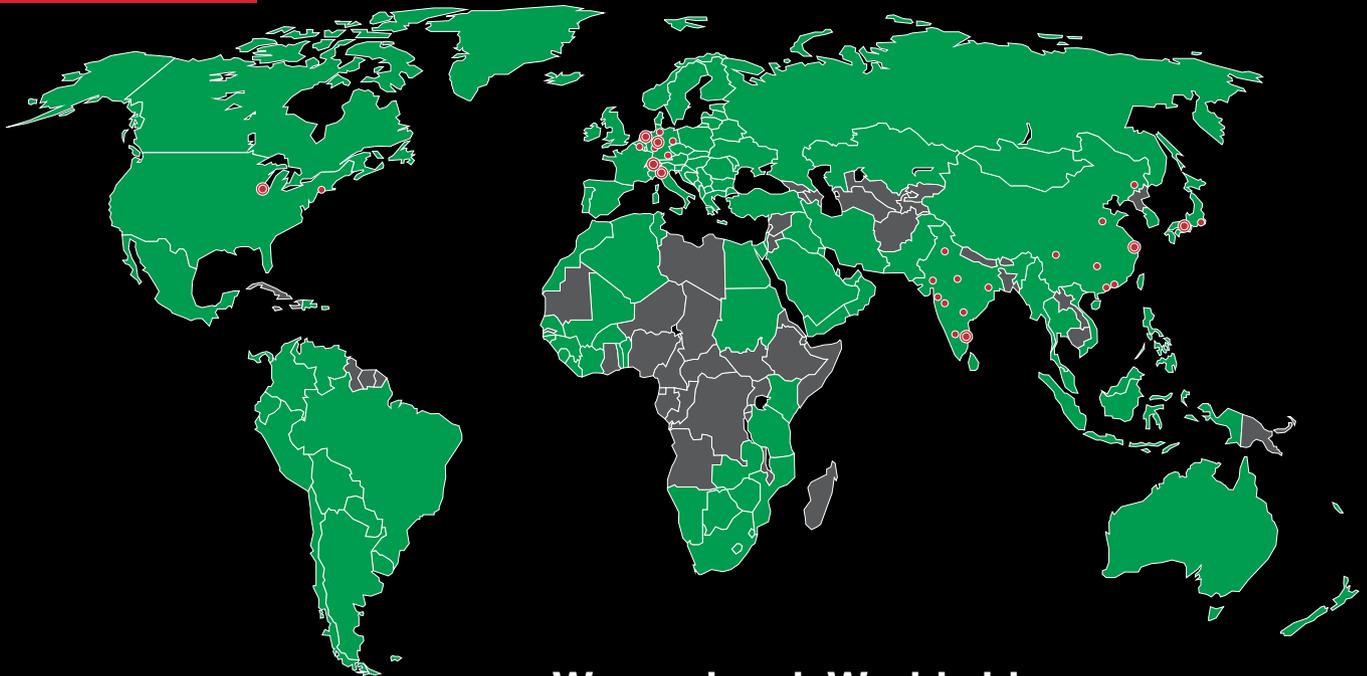

**We are local. Worldwide.**

Our close worldwide network of more than 130 Sales and Service Centers in more than 100 countries.

**Europe:**

Andorra  
Austria  
Belgium  
Cyprus  
Denmark  
Finland  
France  
Germany  
Greece  
Iceland  
Ireland  
Italy  
Luxembourg  
Malta  
Monaco  
Netherlands  
Norway  
Portugal  
Liechtenstein  
San Marino  
Spain

Sweden  
Switzerland  
Turkey  
United Kingdom  
Vatican  
Albania  
Armenia  
Azerbaijan  
Belarus  
Bosnia-Herzegovina  
Bulgaria  
Croatia  
Czech Republic  
Estonia  
Georgia  
Hungary  
Kosovo  
Latvia  
Lithuania  
Macedonia  
Moldova  
Montenegro

Poland  
Romania  
Russia  
Serbia  
Slovakia  
Slovenia  
Ukraine

**Americas:**

Canada  
Mexico  
USA  
Belize  
Costa Rica  
El Salvador  
Guatemala  
Honduras  
Nicaragua  
Panama  
Argentina  
Bolivia  
Brazil

Chile  
Colombia  
Ecuador  
Peru  
Venezuela

**Central Asia:**

Kazakhstan  
Kyrgyzstan  
Tajikistan  
Turkmenistan  
Uzbekistan

**Middle East:**

Bahrain  
Iran  
Iraq  
Israel  
Jordan  
Qatar  
Saudi Arabia  
U.A.E

**Africa:**

Algeria  
Botswana  
Egypt  
Ivory Coast  
Kenya  
Lesotho  
Libya  
Malawi  
Morocco  
Mozambique  
Namibia  
North Sudan  
South Africa  
Swaziland  
Tunisia  
Zambia  
Zimbabwe

**Asia Pacific:**

Bangladesh  
China  
Hong Kong  
India  
Indonesia  
Japan  
Korea  
Macao  
Malaysia  
Mongolia  
Philippines  
Singapore  
Sri Lanka  
Taiwan  
Thailand  
Vietnam

**Oceania:**

Australia  
New Zealand

© Copyright by Leister, Switzerland



email:cmc@cmc.pt

web:www.cmc.pt