

Manual Stacker

- Model:
SDJ500
SDJ1000
SDJ1500



1KG=2.205LB 1INCH=25.40MM

- Electric Pallet Truck
- Electric Stackler
- Order Picker
- Narrow Aisle Truck
- Electric Tow Tractor
- Hand Pallet Truck
- Manual Stackler
- Lift Table

Manual Stacker with Adjustable Forks




Model: SDJA500 SDJA1000 SDJA1500

Forged Forks



- With adjustable forks between 200-950mm.
- Lifting Height from 1600mm to 2500mm.
- High quality steel mast ensures rigidity and durability.
- Adjustable forged forks.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

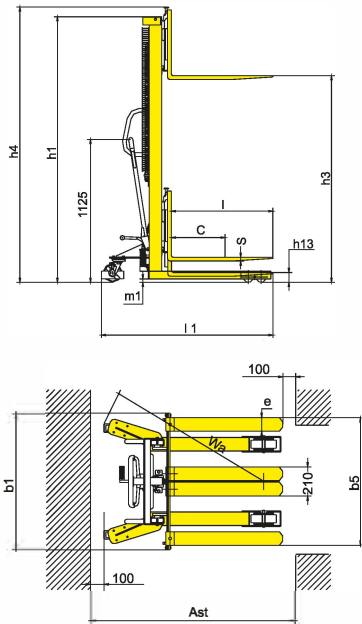

SDJA series with fixed legs adjustable forged forks

		1KG=2.205LB 1INCH=25.40MM		
Model		SDJA500	SDJA1000	SDJA1500
Load capacity/rated load	Q(kg)	500	1000	1500
Load centre distance	c(mm)	500	500	500
Fork height, lowered	h ₁₃ (mm)	90	90	90
Height, mast lowered	h ₁ (mm)	2000	2085/1840	2090
Max. lift height	h ₂ (mm)	1600	1600/2500	1600
Height, mast extended	h ₃ (mm)	2010	2165/2925	2150
Overall length	l ₁ (mm)	1380/1640	1380/1640	1380/1640
Overall width	b ₁ (mm)	805	1000/750	1000
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)	30/100/800(1060)
Width overall forks	b ₂ (mm)	200~745	200~950/700	200~950
Ground clearance, laden, below mast	m ₁ (mm)	20	25	25
Aisle width for pallets 1000x1200 crossways	A ₁ (mm)	1915	1915	1915
Aisle width for pallets 800x1200 lengthways	A ₂ (mm)	1910	-	-
Turning radius	W ₁ (mm)	1235	1235	1235
Lift speed,laden/unladen	mm/time	25	25	21
Lowering speed,laden/unladen	mm/s	Manual control	Manual control	Manual control
Service weight	kg	161	250/316	280

Model: SJJA20E

Forged Forks

- Compact design with strong steel construction.
- High quality steel mast ensures rigidity and durability.
- Adjustable forged forks.
- Screw release allows forks to descend.
- Foot operated lift for raising loads.
- With folded type foot pedal.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

Model: SJJA20E-III


Overall forks



Folded Foot Pedal

SJJA20E series with fixed legs adjustable forks

		1KG=2.205LB 1INCH=25.40MM	
Model		SJJA20E	SJJA20E-III
Load capacity/rated load	Q(kg)	2000	2000
Load centre distance	c(mm)	400	400
Fork height, lowered	h ₁₃ (mm)	90	90
Height, mast lowered	h ₁ (mm)	2085	2085
Max. lift height	h ₂ (mm)	1500	1500
Height, mast extended	h ₃ (mm)	2085	2085
Overall length	l ₁ (mm)	1386	1482
Overall width	b ₁ (mm)	1000	830
Fork dimensions	s/e/l(mm)	32/120/900	60/166/900
Width overall forks	b ₂ (mm)	250~950	350-710
Round clearance, laden,below mast	m ₁ (mm)	25	20
Aisle width for pallets 1000x1200 crossways	A ₁ (mm)	2050	2166
Aisle width for pallets 800x1200 lengthways	A ₂ (mm)	2040	-
Turning radius	W ₁ (mm)	1250	1250
Lift speed,laden/unladen	mm/time	18/20	18/20
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	292	260

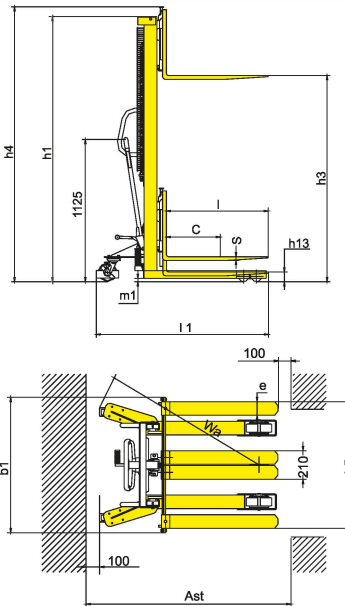


Manual Stacker with Adjustable Forks

Model:
SDJA-I
(1000~1500kg)



- With adjustable forks between 295/310mm to 930mm.
- Shaft type forks help to control adjustment better.
- High quality steel mast and strong steel construction ensures rigidity and durability.
- Welded forks deliver low-cost solution.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

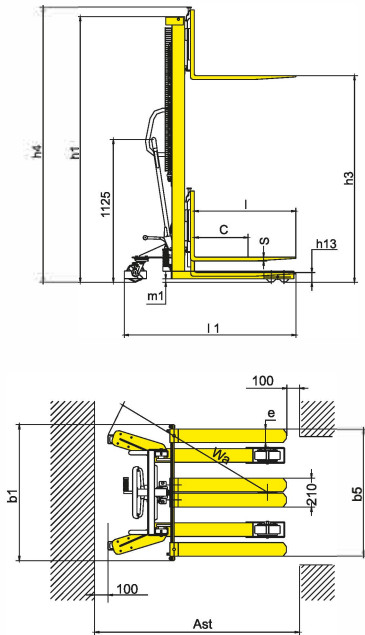


SDJA series with fixed legs and adjustable forks

		1KG=2.205LB 1INCH=25.40MM	
Model		SDJA1000- I	SDJA1500- I
Load capacity/rated load	Q(kg)	1000	1500
Load centre distance	c(mm)	500	500
Fork height, lowered	h ₀ (mm)	90	90
Height, mast lowered	h ₁ (mm)	2090/1840	2090
Max. lift height	h ₂ (mm)	1600/2500	1600
Height, mast extended	h ₃ (mm)	2090/2925	2090
Overall length	l ₁ (mm)	1680	1680
Overall width	b ₁ (mm)	955	955
Fork dimensions	s/e/l(mm)	60/142/1070	60/154/1070
Width overall forks	b ₅ (mm)	295~930	310~930
Ground clearance, laden, below mast	m ₁ (mm)	25	25
Aisle width for pallets 1000x1200 crossways	A ₀ (mm)	2146	2146
Aisle width for pallets 800x1200 lengthways	A ₀ (mm)	2141	2141
Turning radius	W ₀ (mm)	1235	1235
Lift speed,laden/unladen	mm/time	25	21
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	250/322	270

Manual Stacker with Straddle Legs

Model:
SDJAS500
SDJAS1000

- Straddle legs width reach 1300mm(500kg)and1250mm(1000kgs).
- Lifting Height from 1500-1600mm.
- With adjustable forged forks.
- High quality steel mast ensures rigidity and durability.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

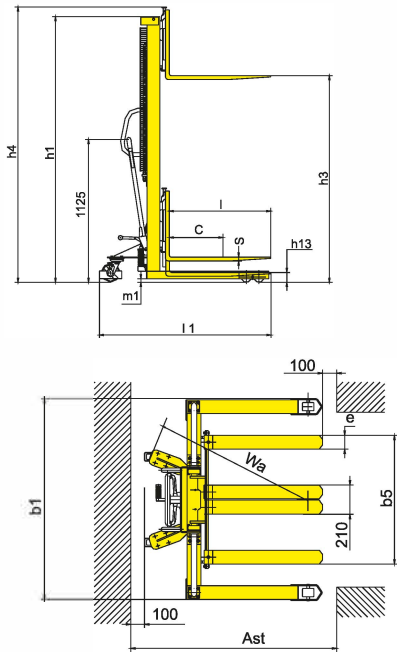


SDJAS series with Straddle legs and adjustable forks

		1KG=2.205LB 1INCH=25.40MM	
Model		SDJAS500	SDJAS1000
Load capacity/rated load	Q(kg)	500	1000
Load centre distance	c(mm)	500	500
Fork height, lowered	h ₀ (mm)	70	70
Height, mast lowered	h ₁ (mm)	2000	2050
Max. lift height	h ₂ (mm)	1600	1600
Height, mast extended	h ₃ (mm)	2100	2155
Overall length	l ₁ (mm)	1340/1600	1300/1560
Overall width	b ₁ (mm)	1500	1450
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)
Width overall forks	b ₅ (mm)	745	950
Round clearance, laden,below mast	m ₁ (mm)	25	25
Aisle width for pallets 1000x1200 crossways	A ₀ (mm)	1975	1975
Aisle width for pallets 800x1200 lengthways	A ₀ (mm)	1915	1915
Turning radius	W ₀ (mm)	1200	1200
Lift speed,laden/unladen	mm/time	25	25
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	223	294



Drum Lifter

Model: YTD-35

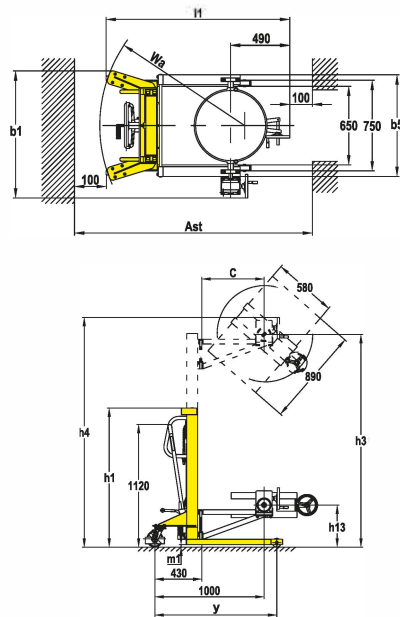

Drum Stacker

	1KG=2.205LB	1INCH=25.40MM
Model		YTD-35
Capacity	Q(kg)	350
Load centre distance	c(mm)	570
Wheelbase	y(mm)	1115
Tyre size, front	(mm)	φ 80x36
Tyre size rear	(mm)	φ 147x40
Height, mast lowered	h ₁ (mm)	1270/1490
Max. lift height	h ₂ (mm)	1945/2385
Height, mast extended	h ₃ (mm)	2100/2640
Lowered fork height	h ₄ (mm)	385
Overall length	l ₁ (mm)	1520
Overall width	b ₁ (mm)	1050
Width overall forks	b ₂ (mm)	840
Ground clearance, laden, below mast	m ₁ (mm)	22
Turning radius	W ₁ (mm)	1200
Lowering speed, laden/unladen	mm/s	manual control
Service weight	kg	235

Drum Loader

Model: HD08

Max.Height of Drum: 957mm
Min.Height of Drum: 832mm
Drum Dia: 580mm

- Easily and quickly lift drums without hydraulic or electric connections.



Model: HD08
Cap. :300kg



Model: HD16
Cap. : 300kg



Model: HD32
Cap. : 300kg

Lift Table

